



Avaya Solution & Interoperability Test Lab

Application Notes for Configuring Avaya Aura ® Communication Manager R10.1, Avaya Aura ® Session Manager R10.1 and Avaya Session Border Controller for Enterprise R10.1 to support BT Global Services OneVoice SIP Trunk UK - Issue 1.0

Abstract

These Application Notes describe the steps used to configure Session Initiation Protocol (SIP) trunking between BT Global Services OneVoice SIP Trunk UK and an Avaya SIP enabled Enterprise Solution. The Avaya solution consists of Avaya Session Border Controller for Enterprise, Avaya Aura® Session Manager and Avaya Aura® Communication Manager as an Evolution Server.

The BT Global Services SIP Trunk Platform provides PSTN access via a SIP trunk connected to the BT Global Services Voice over Internet Protocol (VoIP) network as an alternative to legacy analogue or digital trunks. BT Global Services is a member of the Avaya DevConnect Service Provider program.

Readers should pay attention to **Section 2**, in particular the scope of testing as outlined in **Section 2.1** as well as the observations noted in **Section 2.2**, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

Table of Contents

1. Introduction	4
2. General Test Approach and Test Results	4
2.1. Interoperability Compliance Testing.....	5
2.2. Test Results	6
2.3. Support	6
3. Reference Configuration.....	7
4. Equipment and Software Validated	8
5. Configure Avaya Aura® Communication Manager.....	9
5.1. Confirm System Features	9
5.2. Administer IP Node Names.....	10
5.3. Administer IP Network Region.....	11
5.4. Administer IP Codec Set	12
5.5. Administer SIP Signaling Groups	13
5.6. Administer SIP Trunk Groups.....	14
5.7. Administer Calling Party Number Information	16
5.8. Administer Route Selection for Outbound Calls.....	16
5.9. Administer Incoming Digit Translation	18
5.10. EC500 Configuration.....	19
6. Configuring Avaya Aura® Session Manager.....	20
6.1. Log in to Avaya Aura® System Manager.....	20
6.2. Administer SIP Domain	21
6.3. Administer Locations	22
6.4. Administer Adaptations.....	25
6.5. Administer SIP Entities	27
6.5.1. Avaya Aura® Session Manager SIP Entity	28
6.5.2. Avaya Aura® Communication Manager SIP Entity	29
6.5.3. Avaya Session Border Controller for Enterprise SIP Entity.....	30
6.6. Administer Entity Links	31
6.7. Administer Routing Policies	32
6.8. Administer Dial Patterns	33
7. Configure Avaya Session Border Controller for Enterprise.....	35
7.1. Access Avaya Session Border Controller for Enterprise	35
7.2. Define Network Management	37
7.3. Define TLS Profiles	40
7.3.1. Certificates	40
7.3.2. Client Profile	41
7.3.3. Server Profile	42
7.4. Define Interfaces	43
7.4.1. Signalling Interfaces	43
7.4.2. Media Interfaces.....	44
7.5. Define Server Interworking.....	45
7.5.1. Server Interworking Avaya.....	45

7.5.2.	Server Interworking – BT Global Services SIP Platform	47
7.6.	Signalling Manipulation	49
7.7.	Define Servers	50
7.7.1.	Server Configuration – Avaya	50
7.7.2.	Server Configuration – BT Global Services	52
7.8.	Routing	54
7.8.1.	Routing – Avaya	54
7.8.2.	Routing – BT Global Services	55
7.9.	Topology Hiding	57
7.10.	Domain Policies.....	58
7.10.1.	Media Rules.....	59
7.11.	End Point Policy Groups	61
7.11.1.	End Point Policy Group – Session Manager	61
7.11.2.	End Point Policy Group – BT Global Services	62
7.12.	Server Flows	63
8.	Configure the BT Global Services SIP Equipment	66
9.	Verification Steps	66
10.	Conclusion	68
11.	Additional References	69

1. Introduction

These Application Notes describe the steps used to configure Session Initiation Protocol (SIP) trunking between the BT Global Services OneVoice SIP Trunk UK and an Avaya SIP-enabled enterprise solution. The Avaya solution consists of the following: Avaya Aura® Communication Manager R10.1 (Communication Manager); Avaya Aura® Session Manager R10.1 (Session Manager); Avaya Session Border Controller for Enterprise R10.1 (Avaya SBCE).

Customers using this Avaya SIP-enabled enterprise solution with the BT Global Services OneVoice SIP Trunk UK are able to place and receive PSTN calls via a dedicated Internet connection and the SIP protocol. This approach generally results in lower cost for the enterprise customer.

2. General Test Approach and Test Results

The general test approach was to configure a simulated enterprise site using an Avaya SIP telephony solution consisting of Communication Manager, Session Manager and Avaya SBCE. The enterprise site was configured to connect to the BT Global Services SIP platform.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya recommends our customers implement Avaya solutions using appropriate security and encryption capabilities enabled by our products. The testing referenced in these DevConnect Application Notes included the enablement of supported encryption capabilities in the Avaya products. Readers should consult the appropriate Avaya product documentation for further information regarding security and encryption capabilities supported by those Avaya products.

Support for these security and encryption capabilities in any non-Avaya solution component is the responsibility of each individual vendor. Readers should consult the appropriate vendor-supplied product documentation for more information regarding those products.

2.1. Interoperability Compliance Testing

To verify SIP trunking interoperability the following features and functionality were exercised during the interoperability compliance test:

- Incoming PSTN calls to various phone types including H.323, SIP and analogue telephones at the enterprise. Calls were routed to the enterprise across the SIP trunk from BT Global Services.
- Outgoing PSTN calls from various phone types including H.323, SIP and analogue telephones at the enterprise. Calls were routed from the enterprise across the SIP trunk to BT Global Services.
- Incoming and Outgoing PSTN calls to/from Avaya one-X® Communicator and Avaya Workplace for Windows soft phones.
- Calls using the G.711A and G.729A codecs.
- DTMF transmission using RFC 2833 with successful Voice Mail/Vector navigation for inbound and outbound calls.
- User features such as hold and resume, transfer, conference, call forwarding, etc.
- Caller ID Presentation and Caller ID Restriction.
- Call coverage and call forwarding for endpoints at the enterprise site.
- Routing inbound vector call to call center agent queues.
- Transmission and response of SIP OPTIONS messages sent by the BT Global Services SIP platform requiring Avaya response and sent by Avaya requiring BT Global Services response.

2.2. Test Results

Interoperability testing of the sample configuration was completed with successful results for the BT Global Services OneVoice SIP Trunk UK with the following observations:

- The BT Global Services Trunk was unable to handle SIP messages with an Avaya proprietary parameter in the Contact header which resulted in the failure of both inbound and outbound calls. The parameter “+avaya-cm-keep-mpro” is present with a value of “no” when Initial IP-IP Direct Media is enabled on Communication Manager SIP Trunk. A SigMa script on the Avaya SBCE was required to remove the parameter “+avaya-cm-keep-mpro”. The details of the Sigma Script and how to configure the script on the Avaya SBCE are outlined in **Section 7.6**.
- Fax calls are not supported on the BT Global Services SIP Trunk therefore T.38 and G.711fax transmissions could not be tested.
- There was no voicemail system available in the BT Lab to test DTMF. Instead DTMF was tested successfully on outbound calls using DTMF input by user on handsets and then studying the call traces captures in wireshark to ensure the payload type 101 and RTP Event 2833 were present in the RTP.
- Various call types were not available to test on the BT Lab. Although calls could not complete, called party numbers were successfully formatted as required.

2.3. Support

For technical support on the Avaya products described in these Application Notes visit <http://support.avaya.com>.

For technical support on BT products please use the following web link.
<http://btbusiness.custhelp.com/app/contact>

3. Reference Configuration

Figure 1 illustrates the test configuration. The test configuration shows an enterprise site connected to the BT Global Services SIP platform. Located at the Enterprise site is an Avaya SBCE, Session Manager and Communication Manager. Endpoints are Avaya 96x1 series IP telephones (with SIP and H.323 firmware), Avaya J179 series IP telephone (with SIP firmware), Avaya 16xx series IP telephones (with H.323 firmware), Avaya analogue telephones and an analogue fax machine. Also included in the test configuration was an Avaya one-X® Communicator soft phone and Avaya Workplace for Windows running on laptop PCs.

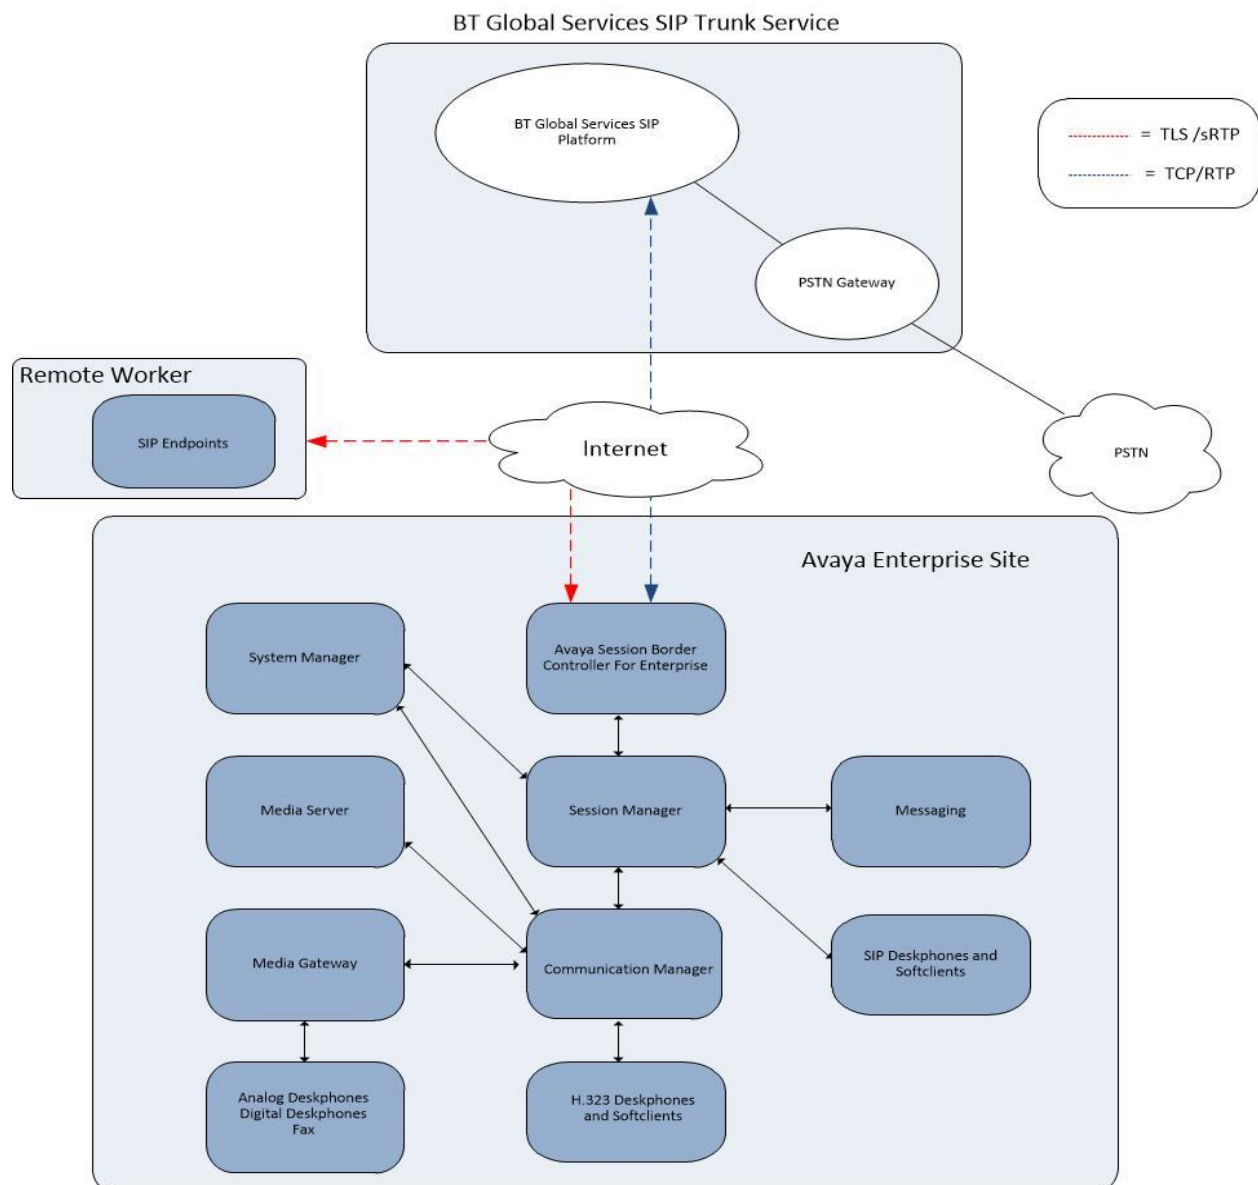


Figure 1: BT Global Services OneVoice SIP Trunk UK to Avaya Enterprise

4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided:

Equipment/Software	Release/Version
Avaya	
Avaya Aura® System Manager	10.1.2.0 Build No. – 10.1.0.0.537353 Software Update Revision No: 10.1.2.0.0715474 – Feature Pack 2
Avaya Aura® Session Manager	10.1.2.0.1012016
Avaya Aura® Communication Manager	10.1 Feature Pack 2 - 27783
Avaya Session Border Controller for Enterprise	10.1.0.0-32-21432
Avaya G430 Media Gateway	42.18.2
Avaya Aura® Media Server	10.1.0 SP2
Avaya Aura® Messaging	7.2 SP3
Avaya 96x1 IP Deskphone (H.323)	6.8.5
Avaya 9611 IP Deskphone (SIP)	7.1.15
Avaya 9608 IP Deskphone (SIP)	7.1.15
Avaya J179 IP Deskphone (SIP)	4.1.0
Avaya one-X® Communicator (H.323 & SIP)	6.2.14.17 -SP14-Patch 8
Avaya Workplace for Windows (SIP)	3.31.2
Avaya 1408 Digital Telephone	R48
Analogue Fax	N/A
BT Global Services	
Ribbon Q21 SBC	v9.3.8.0
NOAS-CS-UK PoP	R63.4.2

5. Configure Avaya Aura® Communication Manager

This section describes the steps for configuring Communication Manager for SIP Trunking. SIP trunks are established between Communication Manager and Session Manager. These SIP trunks will carry SIP signalling associated with the BT Global Services OneVoice SIP Trunk UK. For incoming calls, Session Manager receives SIP messages from the Avaya SBCE and directs the incoming SIP messages to Communication Manager. Once the message arrives at Communication Manager further incoming call treatment, such as incoming digit translations and class of service restrictions may be performed. All outgoing calls to the PSTN are processed within Communication Manager and may be first subject to outbound features such as automatic route selection, digit manipulation and class of service restrictions. Once Communication Manager selects a SIP trunk, the SIP signalling is routed to Session Manager. The Session Manager directs the outbound SIP messages to the Avaya SBCE at the enterprise site that then sends the SIP messages to the BT Global Services OneVoice SIP Trunk UK. Communication Manager configuration was performed using the System Access Terminal (SAT). Some screens in this section have been abridged and highlighted for brevity and clarity in presentation. The general installation of the Servers and Avaya G430 Media Gateway is presumed to have been previously completed and is not discussed here.

5.1. Confirm System Features

The license file installed on the system controls the maximum values for these attributes. If a required feature is not enabled or there is insufficient capacity, contact an authorized Avaya sales representative to add additional capacity. Use the **display system-parameters customer-options** command and on **Page 2**, verify that the **Maximum Administered SIP Trunks** supported by the system is sufficient for the combination of trunks to the BT Global Service SIP platform and any other SIP trunks used.

display system-parameters customer-options		Page	2 of 12
OPTIONAL FEATURES			
IP PORT CAPACITIES		USED	
Maximum Administered H.323 Trunks:		4000	0
Maximum Concurrently Registered IP Stations:		2400	3
Maximum Administered Remote Office Trunks:		4000	0
Maximum Concurrently Registered Remote Office Stations:		2400	0
Maximum Concurrently Registered IP eCons:		68	0
Max Concur Registered Unauthenticated H.323 Stations:		100	0
Maximum Video Capable Stations:		2400	0
Maximum Video Capable IP Softphones:		2400	0
Maximum Administered SIP Trunks:		4000	20
Maximum Administered Ad-hoc Video Conferencing Ports:		4000	0
Maximum Number of DS1 Boards with Echo Cancellation:		80	0

On **Page 5**, verify that **IP Trunks** field is set to **y**.

display system-parameters customer-options		Page 5 of 12
OPTIONAL FEATURES		
Emergency Access to Attendant? y	IP Stations? y	
Enable 'dadmin' Login? y		
Enhanced Conferencing? y	ISDN Feature Plus? n	
Enhanced EC500? y	ISDN/SIP Network Call Redirection? y	
Enterprise Survivable Server? n	ISDN-BRI Trunks? y	
Enterprise Wide Licensing? n	ISDN-PRI? y	
ESS Administration? y	Local Survivable Processor? n	
Extended Cvg/Fwd Admin? y	Malicious Call Trace? y	
External Device Alarm Admin? y	Media Encryption Over IP? y	
Five Port Networks Max Per MCC? n	Mode Code for Centralized Voice Mail? n	
Flexible Billing? n		
Forced Entry of Account Codes? y	Multifrequency Signaling? y	
Global Call Classification? y	Multimedia Call Handling (Basic)? y	
Hospitality (Basic)? y	Multimedia Call Handling (Enhanced)? y	
Hospitality (G3V3 Enhancements)? y	Multimedia IP SIP Trunking? y	
IP Trunks? y		
IP Attendant Consoles? y		

5.2. Administer IP Node Names

The node names defined here will be used in other configuration screens to define a SIP signalling group between Communication Manager and Session Manager. In the **IP Node Names** form, assign the node **Name** and **IP Address** for Session Manager. In this case, **Session Manager** and **10.10.3.42** are the **Name** and **IP Address** for the Session Manager SIP interface. Also note the **procr** IP address as this is the processor interface that Communication Manager will use as the SIP signalling interface to Session Manager.

display node-names ip		IP NODE NAMES
Name	IP Address	
AMS	10.10.3.45	
Session_Manager	10.10.3.42	
default	0.0.0.0	
procr	10.10.3.44	
procr6	::	

5.3. Administer IP Network Region

Use the **change ip-network-region n** command where **n** is the chosen value of the configuration for the SIP Trunk. Set the following values:

- The **Authoritative Domain** field is configured to match the domain name configured on Session Manager. In this configuration, the domain name is **avaya.com**.
- By default, **IP-IP Direct Audio** (both **Intra-** and **Inter-Region**) is enabled (**yes**) to allow audio traffic to be sent directly between endpoints without using gateway VoIP resources. When a PSTN call is shuffled or the call is set up with initial IP-IP direct media, the media stream is established directly between the enterprise end-point and the internal media interface of the Avaya SBCE.
- The **Codec Set** is set to the number of the IP codec set to be used for calls within the IP network region. In this case, codec set **1** is used.
- The rest of the fields can be left at default values.

```
change ip-network-region 1                                     Page 1 of 20
                                                                IP NETWORK REGION
Region: 2
Location:      Authoritative Domain: avaya.com
Name: Trunk    Stub Network Region: n
MEDIA PARAMETERS Intra-region IP-IP Direct Audio: yes
Codec Set: 1   Inter-region IP-IP Direct Audio: yes
UDP Port Min: 2048 IP Audio Hairpinning? n
UDP Port Max: 3329
DIFFSERV/TOS PARAMETERS
Call Control PHB Value: 46
Audio PHB Value: 46
Video PHB Value: 26
802.1P/Q PARAMETERS
Call Control 802.1p Priority: 6
Audio 802.1p Priority: 6
Video 802.1p Priority: 5    AUDIO RESOURCE RESERVATION PARAMETERS
H.323 IP ENDPOINTS          RSVP Enabled? n
H.323 Link Bounce Recovery? y
Idle Traffic Interval (sec): 20
Keep-Alive Interval (sec): 5
Keep-Alive Count: 5
```

5.4. Administer IP Codec Set

Open the IP Codec Set form for the codec set specified in the IP Network Region form in **Section 5.3** by typing **change ip-codec set n** where **n** is the chosen value of the configuration for the SIP Trunk. Enter the list of audio codec's eligible to be used in order of preference. For the interoperability test the codecs supported by BT Global Services were configured, namely **G.711A** and **G.729A**.

In addition to the codec's, the **Media Encryption** is defined here. For the compliance test, a value of **srtp-aescm128-hmac80** was used.

change ip-codec-set 1

Page 1 of 2

IP MEDIA PARAMETERS

Codec Set: 2

Audio Codec	Silence Suppression	Frames Per Pkt	Packet Size (ms)
1: G.711A	n	2	20
2: G.729A	n	2	20
3:			
4:			
5:			
6:			

Media Encryption

1: srtp-aescm128-hmac80

2: none

Encrypted SRTCP: enforce-unenc-srtpc

5.5. Administer SIP Signaling Groups

This signalling group (and trunk group) will be used for inbound and outbound PSTN calls to the BT Global Services SIP platform. Configure the **Signaling Group** using the **add signaling-group n** command as follows:

- Set **Group Type** to **sip**.
- Set **Transport Method** to **tls**.
- Set **Peer Detection Enabled** to **y** allowing Communication Manager to automatically detect if the peer server is a Session Manager.
- Set **Near-end Node Name** to the processor interface (node name **procr** as defined in the **IP Node Names** form shown in **Section 5.2**).
- Set **Far-end Node Name** to Session Manager interface (node name **Session_Manager** as defined in the **IP Node Names** form shown in **Section 5.2**).
- Set **Near-end Listen Port** and **Far-end Listen Port** as required. The standard value for TLS is **5061**.
- Set **Far-end Network Region** to the IP Network Region configured in **Section 5.3** (logically establishes the far-end for calls using this signalling group as region **1**).
- Leave **Far-end Domain** blank to allow Communication Manager to accept calls from any SIP domain on the associated trunk.
- Leave **DTMF over IP** at default value of **rtp-payload** (Enables **RFC2833** for DTMF transmission from Communication Manager).
- Set **Direct IP-IP Audio Connections** to **y**.
- Set **Initial IP-IP Direct Media** to **y**.
- Set **H.323 Station Outgoing Direct Media** to **y**.

The default values for the other fields may be used.

add signaling-group 1		Page 1 of 2
SIGNALING GROUP		
Group Number: 1	Group Type: sip	
IMS Enabled? n	Transport Method: tls	
Q-SIP? n		
IP Video? n	Enforce SIPS URI for SRTP? n	
Peer Detection Enabled? y	Peer Server: SM	
Prepend '+' to Outgoing Calling/Alerting/Diverting/Connected Public Numbers? y		
Remove '+' from Incoming Called/Calling/Alerting/Diverting/Connected Numbers? n		
Alert Incoming SIP Crisis Calls? n		
Near-end Node Name: procr	Far-end Node Name: Session_Manager	
Near-end Listen Port: 5061	Far-end Listen Port: 5061	
	Far-end Network Region: 1	
Far-end Domain:		
	Bypass If IP Threshold Exceeded? n	
Incoming Dialog Loopbacks: eliminate	RFC 3389 Comfort Noise? n	
DTMF over IP: rtp-payload	Direct IP-IP Audio Connections? y	
Session Establishment Timer(min): 3	IP Audio Hairpinning? n	
Enable Layer 3 Test? n	Initial IP-IP Direct Media? y	
H.323 Station Outgoing Direct Media? y	Alternate Route Timer(sec): 6	

5.6. Administer SIP Trunk Groups

A trunk group is associated with the signaling group described in **Section 5.5**. Configure the trunk group using the **add trunk-group n** command, where **n** is an available trunk group for the SIP Trunk. On **Page 1** of this form:

- Set the **Group Type** field to **sip**.
- Choose a descriptive **Group Name**.
- Specify a trunk access code (**TAC**) consistent with the dial plan.
- The **Direction** is set to **two-way** to allow incoming and outgoing calls.
- Set the **Service Type** field to **public-ntwrk**.
- Specify the signalling group associated with this trunk group in the **Signaling Group** field as previously configured in **Section 5.5**.
- Specify the **Number of Members** administered for this SIP trunk group.

add trunk-group 1		Page 1 of 21	
TRUNK GROUP			
Group Number: 1	Group Type: sip	CDR Reports: y	
Group Name: OUTSIDE CALL	COR: 1	TN: 1	TAC: 101
Direction: two-way	Outgoing Display? n		
Dial Access? n	Night Service:		
Queue Length: 0			
Service Type: public-ntwrk	Auth Code? n		
	Member Assignment Method: auto		
	Signaling Group: 1		
	Number of Members: 10		

On **Page 2** of the trunk-group form, the Preferred **Minimum Session Refresh Interval (sec)** field should be set to a value mutually agreed with BT Global Services to prevent unnecessary SIP messages during call setup. During testing, a value of **900** was used that sets Min-SE and Session-Expires to 1800 in the SIP signalling.

add trunk-group 1		Page 2 of 21	
Group Type: sip			
TRUNK PARAMETERS			
Unicode Name: auto			
Redirect On OPTIM Failure: 5000			
SCCAN? n	Digital Loss Group: 18		
Preferred Minimum Session Refresh Interval(sec): 900			
Disconnect Supervision - In? y Out? y			
XOIP Treatment: auto Delay Call Setup When Accessed Via IGAR? n			
Caller ID for Service Link Call to H.323 1xC: station-extension			

On **Page 3**, set the **Numbering Format** field to **public**. This allows delivery of CLI in E.164 format with leading “+”.

add trunk-group 1	Page 3 of 21
TRUNK FEATURES	
ACA Assignment? n	Measured: none
	Maintenance Tests? y
Suppress # Outpulsing? n	Numbering Format: public
	UUI Treatment: service-provider
	Replace Restricted Numbers? n
	Replace Unavailable Numbers? n
	Hold/Unhold Notifications? y
	Modify Tandem Calling Number: no
Show ANSWERED BY on Display? y	

On **Page 4** of this form:

- Set **Mark Users as Phone** to **y**.
- Set **Send Transferring Party Information** to **n**.
- Set **Network Call Direction** to **n**.
- Set **Send Diversion Header** to **y**.
- Set **Support Request History** to **n**.
- Set the **Telephone Event Payload Type** to **101** as requested BT Global Services.
- Set **Always Use re-INVITE for Display Updates** to **y**.
- Set the **Identity for Calling Party Display** to **P-Asserted-Identity**.

add trunk-group 1	Page 4 of 21
PROTOCOL VARIATIONS	
	Mark Users as Phone? y
Prepend '+' to Calling/Alerting/Diverting/Connected Number? n	
	Send Transferring Party Information? n
	Network Call Redirection? n
	Send Diversion Header? y
	Support Request History? n
	Telephone Event Payload Type: 101
	Convert 180 to 183 for Early Media? n
	Always Use re-INVITE for Display Updates? y
	Identity for Calling Party Display: P-Asserted-Identity
Block Sending Calling Party Location in INVITE? n	
Accept Redirect to Blank User Destination? n	
	Enable Q-SIP? N
Interworking of ISDN Clearing with In-Band Tones: keep-channel-active	
	Request URI Contents: may-have-extra-digits

5.7. Administer Calling Party Number Information

Use the **change public-unknown-numbering** command to configure Communication Manager to send the calling party number in the format required. These calling party numbers are sent in the SIP From, Contact and PAI headers as well as the Diversion header for forwarded calls. The numbers are displayed on display-equipped PSTN telephones with any reformatting performed in the network. The public numbering table is used for numbers in E.164 format.

change public-unknown-numbering 0					Page 1 of 2
NUMBERING - PUBLIC/UNKNOWN FORMAT					
Ext Len	Ext Code	Trk Grp(s)	CPN Prefix	Total CPN Len	
4	6102	1	441xxxxxx510	12	Total Administered: 4
4	6100	1	441xxxxxx511	12	Maximum Entries: 240
4	6010	1	441xxxxxx512	12	Note: If an entry applies to a SIP connection to Avaya Aura(R) Session Manager, the resulting number must be a complete E.164 number.
4	6020	1	441xxxxxx513	12	
4	6104	1	441xxxxxx514	12	
					Communication Manager automatically inserts a '+' digit in this case.

5.8. Administer Route Selection for Outbound Calls

In the test environment, the Automatic Route Selection (ARS) feature was used to route outbound calls via the SIP trunk to the BT Global Services SIP platform. The single digit **9** was used as the ARS access code providing a facility for telephone users to dial 9 to invoke ARS directly. Use the **change feature-access-codes** command to configure a digit as the **Auto Route Selection (ARS) - Access Code 1**.

change feature-access-codes		Page 1 of 10
FEATURE ACCESS CODE (FAC)		
Abbreviated Dialing List1 Access Code:		
Abbreviated Dialing List2 Access Code:		
Abbreviated Dialing List3 Access Code:		
Abbreviated Dial - Prgm Group List Access Code:		
Announcement Access Code: *69		
Answer Back Access Code:		
Attendant Access Code:		
Auto Alternate Routing (AAR) Access Code: 7		
Auto Route Selection (ARS) - Access Code 1: 9		Access Code 2:

Use the **change ars analysis** command to configure the routing of dialled digits following the first digit 9. A small sample of dial patterns are shown here as an example. Further administration of ARS is beyond the scope of this document. The example entries shown will match outgoing calls to numbers beginning **0**. Note that exact maximum number lengths should be used where possible to reduce post-dial delay. Calls are sent to **Route Pattern 1**.

change ars analysis 0							Page 1 of 2
ARS DIGIT ANALYSIS TABLE							
Location: all							Percent Full: 0
Dialed String	Total Min	Total Max	Route Pattern	Call Type	Node Num	ANI Req'd	
0	11	14	1	pubu		n	
00	13	15	1	pubu		n	
0035391	13	13	1	pubu		n	
030	10	10	1	pubu		n	
0800	8	10	1	pubu		n	
0900	8	8	1	pubu		n	

Use the **change route-pattern x** command, where **x** is an available route pattern, to add the SIP trunk group to the route pattern that ARS selects. In this configuration, route pattern **1** is used to route calls to trunk group **1**. **Numbering Format** is applied to CLI and is used to set TDM signalling parameters such as type of number and numbering plan indicator. This does not have the same significance in SIP calls and during testing it was set to **unk-unk**.

change route-pattern 1														Page	1 of	3		
Pattern Number: 1														Pattern Name:				
SCCAN? n														Secure SIP? n				
Grp	FRL	NPA	Pfx	Hop	Toll	No.	Inserted							DCS/	IXC			
No			Mrk	Lmt	List	Del	Digits							QSIG				
Dgts														Intw				
1:	1	0												n	user			
2:														n	user			
3:														n	user			
4:														n	user			
5:														n	user			
6:														n	user			
		BCC		VALUE		TSC	CA-TSC		ITC		BCIE		Service/Feature		PARM	No.	Numbering	LAR
		0	1	2	M	4	W	Request								Dgts	Format	
														Subaddress				
1:	y	y	y	y	y	n	n	rest								unk-unk	none	
2:	y	y	y	y	y	n	n	rest									none	
3:	y	y	y	y	y	n	n	rest									none	
4:	y	y	y	y	y	n	n	rest									none	
5:	y	y	y	y	y	n	n	rest									none	
6:	y	y	y	y	y	n	n	rest									none	

5.9. Administer Incoming Digit Translation

This step configures the settings necessary to map incoming DDI calls to the proper Communication Manager extension(s). The incoming digits sent in the INVITE message from BT can be manipulated as necessary to route calls to the desired extension. In the examples used in the compliance testing, the incoming DDI numbers provided by BT Global Services SIP platform correlate to the internal extensions assigned within Communication Manager. The entries displayed below translate incoming DDI numbers **441xxxxxx510**, **441xxxxxx511**, **441xxxxxx512**, **441xxxxxx513** and **441xxxxxx51** to a 4-digit extension by deleting all of the incoming digits and inserting an extension.

change inc-call-handling-trmt trunk-group 1				Page	1 of	3
INCOMING CALL HANDLING TREATMENT						
Service/ Feature	Number Len	Del	Insert Digits			
public-ntwrk	12	441xxxxxx510	all	6102		
public-ntwrk	12	441xxxxxx511	all	6100		
public-ntwrk	12	441xxxxxx512	all	6010		
public-ntwrk	12	441xxxxxx513	all	6020		
public-ntwrk	12	441xxxxxx514	all	6104		

5.10. EC500 Configuration

When EC500 is enabled on a Communication Manager station, a call to that station will generate a new outbound call from Communication Manager to the configured EC500 destination, typically a mobile phone.

The following screen shows an example EC500 configuration for the user with station extension 6102. Use the command **change off-pbx-telephone station-mapping x** where **x** is Communication Manager station.

- The **Station Extension** field will automatically populate with station extension.
- For **Application** enter **EC500**.
- Enter a **Dial Prefix** if required by the routing configuration, none was required during testing.
- For the **Phone Number** enter the phone that will also be called (e.g. **0035389434xxxx**).
- Set the **Trunk Selection** to **ars** so that the ARS table will be used for routing.
- Set the **Config Set** to **1**.

change off-pbx-telephone station-mapping 6102							Page	1 of	3
STATIONS WITH OFF-PBX TELEPHONE INTEGRATION									
Station	Application	Dial	CC	Phone Number	Trunk	Config	Dual		
Extension		Prefix			Selection	Set	Mode		
6102	EC500	-		0035389434xxxx	ars	1			

Note: The phone number shown is for a mobile phone in the Avaya Lab. To use facilities for calls coming in from EC500 mobile phones, the calling party number received in Communication Manager must exactly match the number specified in the above table.

Save Communication Manager configuration by entering **save translation**.

6. Configuring Avaya Aura® Session Manager


This section provides the procedures for configuring Session Manager. Session Manager is configured via System Manager. The procedures include the following areas:

- Log in to Avaya Aura® System Manager.
- Administer SIP Domain.
- Administer SIP Location.
- Administer Conditions.
- Administer Adaptations.
- Administer SIP Entities.
- Administer Entity Links.
- Administer Routing Policies.
- Administer Dial Patterns.


It may not be necessary to create all the items above when creating a connection to the service provider since some of these items would have already been defined as part of the initial Session Manager installation. This includes items such as certain SIP domains, locations, SIP entities, and Session Manager itself. However, each item should be reviewed to verify the configuration.

6.1. Log in to Avaya Aura® System Manager

Access the System Manager using a web browser and entering **http://<FQDN>/SMGR**, where **<FQDN>** is the fully qualified domain name of System Manager. Log in using appropriate credentials (not shown) and the Dashboard tab will be presented with menu options shown below.

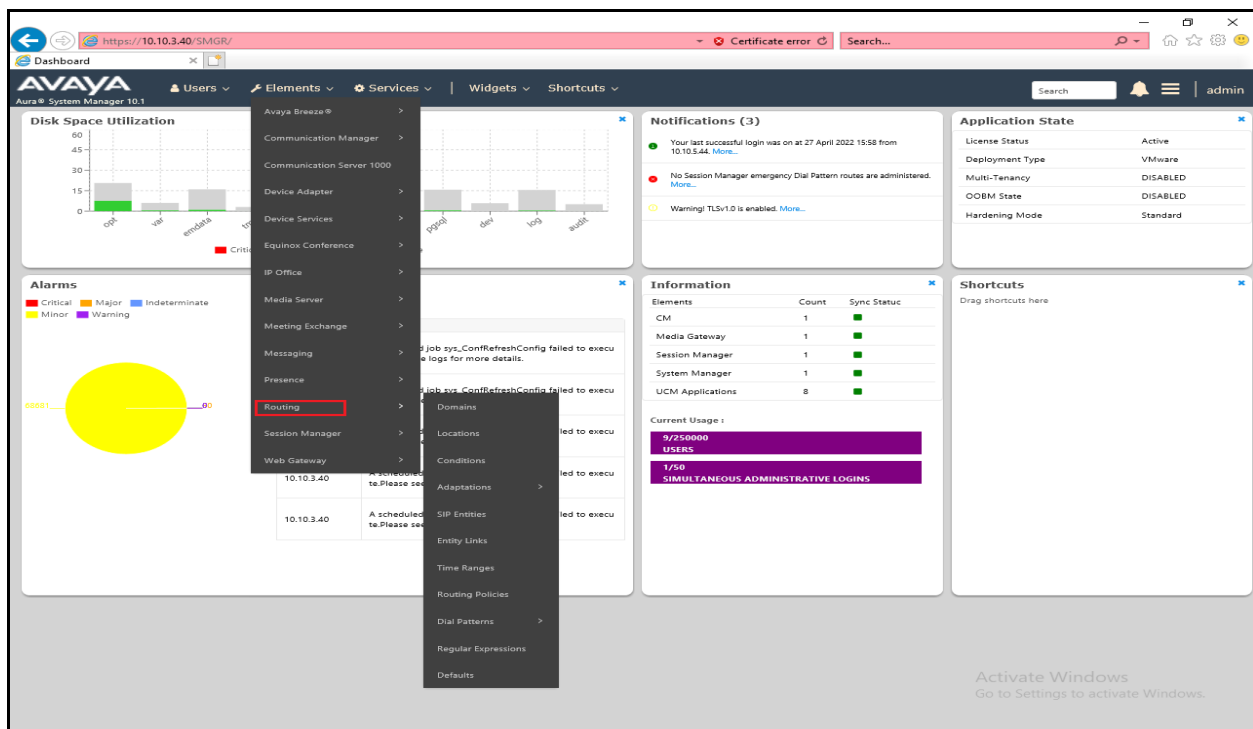

Most of the configuration items are performed in the Routing Element. Click on **Routing** in the Elements column shown above to bring up the **Introduction to Network Routing Policy** screen.

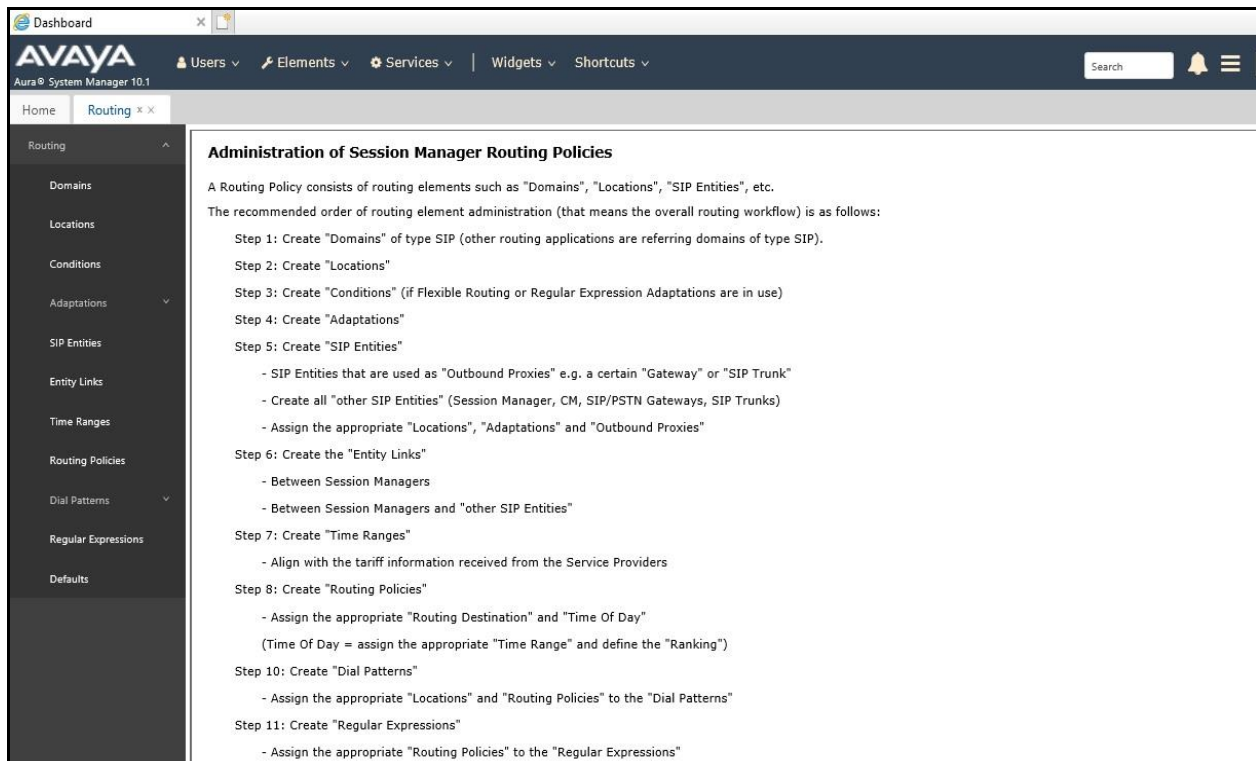


6.2. Administer SIP Domain

Create a SIP domain for each domain for which Session Manager will need to be aware in order to route calls. Expand **Elements** → **Routing** and select **Domains** from the left navigation menu, click **New** (not shown). Enter the following values and use default values for remaining fields.

- **Name** Enter a Domain Name. In the sample configuration, **avaya.com** was used.
- **Type** Verify **SIP** is selected.
- **Notes** Add a brief description [Optional].

Click **Commit** to save. The screen below shows the SIP Domain defined for the sample configuration.

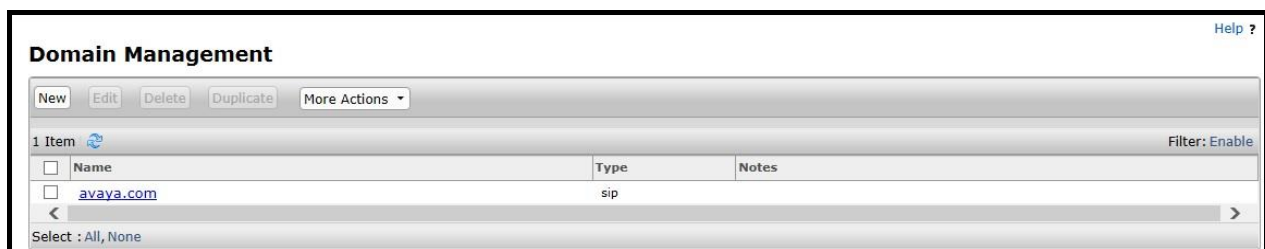

6.3. Administer Locations

Locations can be used to identify logical and/or physical locations where SIP Entities reside for purposes of bandwidth management and call admission control. To add a location, navigate to **Routing → Locations** in the left-hand navigation pane and click the **New** button in the right pane (not shown). In the **General** section, enter the following values. Use default values for all remaining fields:

- **Name:** Enter a descriptive name for the location.
- **Notes:** Add a brief description (optional).

The following screenshot shows the location details named **Session Manager**. This location is assigned to the SIP Entity called Session Manager in **Section 6.5.1**.

The screenshot displays the 'Location Details' configuration page for a location named 'Session Manager'. The page is divided into several sections: 'General', 'Dial Plan Transparency in Survivable Mode', 'Overall Managed Bandwidth', and 'Per-Call Bandwidth Parameters'. In the 'General' section, the 'Name' is set to 'Session Manager' and 'Notes' is empty. The 'Dial Plan Transparency in Survivable Mode' section shows 'Enabled' as unchecked, with empty fields for 'Listed Directory Number' and 'Associated CM SIP Entity'. The 'Overall Managed Bandwidth' section shows 'Managed Bandwidth Units' as 'Kbit/sec', with empty fields for 'Total Bandwidth' and 'Multimedia Bandwidth', and 'Audio Calls Can Take Multimedia Bandwidth' checked. The 'Per-Call Bandwidth Parameters' section shows 'Maximum Multimedia Bandwidth (Intra-Location)' and 'Maximum Multimedia Bandwidth (Inter-Location)' both set to '2000 Kbit/Sec', '* Minimum Multimedia Bandwidth' set to '64 Kbit/Sec', and '* Default Audio Bandwidth' set to '80 Kbit/sec'.

Location Details		Commit	Cancel
General			
* Name:	Session Manager		
Notes:			
Dial Plan Transparency in Survivable Mode			
Enabled:	<input type="checkbox"/>		
Listed Directory Number:			
Associated CM SIP Entity:			
Overall Managed Bandwidth			
Managed Bandwidth Units:	Kbit/sec ▼		
Total Bandwidth:			
Multimedia Bandwidth:			
Audio Calls Can Take Multimedia Bandwidth:	<input checked="" type="checkbox"/>		
Per-Call Bandwidth Parameters			
Maximum Multimedia Bandwidth (Intra-Location):	2000	Kbit/Sec	
Maximum Multimedia Bandwidth (Inter-Location):	2000	Kbit/Sec	
* Minimum Multimedia Bandwidth:	64	Kbit/Sec	
* Default Audio Bandwidth:	80	Kbit/sec ▼	

The location pattern is a way of using subnets to further refine the location information, this may be useful for endpoints that could be logged in from different subnets. If required, scroll to the bottom of the page and under **Location Pattern**, click **Add**, then enter an **IP Address Pattern** in the resulting new row, * is used to specify any number of allowed characters at the end of the string.

The screenshot shows a web interface titled "Location Pattern". At the top, there are "Add" and "Remove" buttons. Below them, a status bar indicates "0 Items" with a refresh icon and a "Filter: Enable" link. A table with two columns, "IP Address Pattern" and "Notes", is shown below the status bar. At the bottom right of the interface, there are "Commit" and "Cancel" buttons.

The following screenshot shows the location details named **Communication Manager**. This location is assigned to the SIP Entity called Communication Manager in **Section 6.5.2**.

The screenshot shows a web interface titled "Location Details" with "Commit" and "Cancel" buttons at the top right. The interface is divided into three sections: "General", "Dial Plan Transparency in Survivable Mode", and "Overall Managed Bandwidth".

- General**: Contains fields for "* Name:" (set to "Communication Manager") and "Notes:".
- Dial Plan Transparency in Survivable Mode**: Contains an "Enabled:" checkbox (unchecked), a "Listed Directory Number:" field, and an "Associated CM SIP Entity:" field.
- Overall Managed Bandwidth**: Contains a "Managed Bandwidth Units:" dropdown menu (set to "Kbit/sec"), a "Total Bandwidth:" field, a "Multimedia Bandwidth:" field, and an "Audio Calls Can Take Multimedia Bandwidth:" checkbox (checked).

The following screenshot shows the location details named **Avaya SBCE**. This location is assigned to the SIP Entity called Avaya SBCE in **Section 6.5.3**.

Location Details

CommitCancel

General

* Name:

Avaya SBCE

Notes:

Dial Plan Transparency in Survivable Mode

Enabled:

☐

Listed Directory Number:

Associated CM SIP Entity:

Overall Managed Bandwidth

Managed Bandwidth Units:

Kbit/sec

Total Bandwidth:

Multimedia Bandwidth:

Audio Calls Can Take Multimedia Bandwidth:

☒

6.4. Administer Adaptations

Session Manager Adaptations can be used to alter parameters in the SIP message headers. An Adaptation was used during testing to remove Avaya proprietary headers from messages sent and remove headers from messages received from BT Global Services. Adaptations can be used to modify the called and calling party numbers to meet the requirements of the service. The called party number present in the SIP INVITE Request URI is modified by the **Digit Conversion** in the Adaptation. In order to improve interoperability with third party elements, Session Manager R10.1 incorporates the ability to use Adaptation modules to remove specific SIP headers that are Avaya proprietary unnecessary for non-Avaya elements.

For the compliance test, an Adaptation named “**BTGS**” was created to block the following headers from outbound messages before they were forwarded to the Avaya SBCE: Alert-Info, P-Conference, Endpoint-View, P-Location, P-Charging-Vector and P-AV-Message-ID. These headers contain private information from the enterprise which should not be propagated outside of the enterprise boundaries. They also add unnecessary size to outbound messages while they have no significance to the service provider.

To add an adaptation, under the **Routing** tab select **Adaptations** on the left-hand menu and then click on the **New** button (not shown). Under **Adaptation Details → General**:

- **Adaption Name:** Enter an appropriate name such as **BTGS**.
- **Module Name:** Select **DigitConversionAdapter**.
- **Modular Parameter Type:** Select **Name-Value Parameter**.

Click **Add** to add the name and value parameters.

- **Name:** Enter **eRHdrs**. This parameter will remove the specific headers from messages in the egress direction.
- **Value:** Enter **P-AV-Message-ID, P-Charging-Vector, P-Location, Endpoint-View, P-Conference, Alert-Info**.
- **Name:** Enter **fromto**. Modifies From and To header of a message.
- **Value:** Enter **true**.
- **Name:** Enter **MIME**. Remove MIME message bodies from Session Manager.
- **Value:** Enter **no**.

Adaptation Details

CommitCancel

Help ?

General

* Adaptation Name: BTGS

* Module Name: DigitConversionAdapter

Module Parameter Type: Name-Value Parameter

AddRemove

<input type="checkbox"/>	Name	Value
<input type="checkbox"/>	ieRHdrs	"P-AV-Message-Id, P-Charging-Vector, P-Location, Endpoint-View, P-Conference, Alert-
<input type="checkbox"/>	fromto	true
<input type="checkbox"/>	MIME	no

Select : All, None

Egress URI Parameters:

Notes:

Scroll down the page and under **Digit Conversion for Incoming Calls to SM**, click the **Add** button and specify the digit manipulation to be performed as follows:

- Enter the leading digits that will be matched in the Matching Pattern field.
- In the **Min** and **Max** fields set the minimum and maximum digits allowed in the digit string to be matched.
- In the **Delete Digits** field enter the number of leading digits to be removed.
- In the **Insert Digits** field specify the digits to be prefixed to the digit string.
- In the **Address to modify** field specify the digits to manipulate by the adaptation. In this configuration the dialed number is the target so **both** have been selected.

Digit Conversion for Outgoing Calls from SM

AddRemove

1 Item

Filter: Enable

<input type="checkbox"/>	Matching Pattern	Min	Max	Phone Context	Delete Digits	Insert Digits	Address to modify	Adaptation Data	Notes
<input type="checkbox"/>	*00	*2	*15		*2	+	both		

Select : All, None

CommitCancel

This will ensure any outgoing numbers matching 00 will be deleted and have + inserted being converted to E.164 format before being forwarded to the Avaya SBCE.

6.5. Administer SIP Entities

A SIP Entity must be added for each SIP-based telephony system supported by a SIP connection to Session Manager. To add a SIP Entity, select **SIP Entities** on the left panel menu and then click on the **New** button (not shown). The following will need to be entered for each SIP Entity.

Under **General**:

- In the **Name** field enter an informative name.
- In the **FQDN or IP Address** field enter the IP address of Session Manager or the signalling interface on the connecting system.
- In the **Type** field use **Session Manager** for a Session Manager SIP Entity, **CM** for a Communication Manager SIP Entity and **SIP Trunk** for the Avaya SBCE SIP Entities.
- In the **Location** field select the appropriate location from the drop-down menu.
- In the **Time Zone** field enter the time zone for the SIP Entity.

In this configuration there are three SIP Entities.

- Session Manager SIP Entity.
- Communication Manager SIP Entity.
- Avaya SBCE SIP Entity.

6.5.1. Avaya Aura® Session Manager SIP Entity

The following screens show the SIP entity for Session Manager. The **FQDN or IP Address** field is set to the IP address of the Session Manager SIP signalling interface and **Type** is **Session Manager**. Set the **Location** to that defined for Session Manager in **Section 6.3** and the **Time Zone** to the appropriate time zone.

SIP Entity Details

CommitCancel

General

* Name: Session Manager

* IP Address: 10.10.3.42

SIP FQDN:

Type: Session Manager

Notes:

Location: Session Manager

Outbound Proxy:

Time Zone: Europe/Dublin

Minimum TLS Version: Use Global Setting

Credential name:

Monitoring

SIP Link Monitoring: Use Session Manager Configuration

CRLF Keep Alive Monitoring: Use Session Manager Configuration

Session Manager must be configured with the port numbers on the protocols that will be used by the other SIP entities. To configure these ports scroll to the bottom of the page and under **Port**, click **Add**, then edit the fields in the resulting new row.

- In the **Port** field enter the port number on which the system listens for SIP requests.
- In the **Protocol** field enter the transport protocol to be used for SIP requests.
- In the **Default Domain** field, from the drop-down menu select the domain added in **Section 6.2** as the default domain.

Failover Ports

TCP Failover port:

TLS Failover port:

Listen Ports

AddRemove

3 ItemsFilter: Enable

<input type="checkbox"/>	Listen Ports	Protocol	Default Domain	Endpoint	Notes
<input type="checkbox"/>	5060	TCP	avaya.com	<input type="checkbox"/>	
<input type="checkbox"/>	5061	TLS	avaya.com	<input type="checkbox"/>	
<input type="checkbox"/>	5061	UDP	avaya.com	<input type="checkbox"/>	

Select : All, None

6.5.2. Avaya Aura® Communication Manager SIP Entity

The following screen shows the SIP entity for Communication Manager which is configured as an Evolution Server. This SIP Entity is used for the SIP Trunk. The **FQDN or IP Address** field is set to the IP address of the interface on Communication Manager that will be providing SIP signalling. Set the **Location** to that defined for Communication Manager in **Section 6.3** and the **Time Zone** to the appropriate time zone.

SIP Entity Details

CommitCancel

General

*

Name:Communication Manager

*

FQDN or IP Address:10.10.3.44

Type:CM

Notes:

Adaptation:

Location:Communication Manager

Time Zone:Europe/Dublin

*

SIP Timer B/F (in seconds):4

Minimum TLS Version:Use Global Setting

Credential name:

Securable:

Call Detail Recording:none

Loop Detection

Loop Detection Mode:On

Loop Count Threshold:5

Loop Detection Interval (in msec):200

Other parameters can be set for the SIP Entity as shown in the following screenshot, but for test, these were left at default values.

Loop Detection

Loop Detection Mode:Off

SIP Link Monitoring

SIP Link Monitoring:Use Session Manager Configuration

6.5.3. Avaya Session Border Controller for Enterprise SIP Entity

The following screen shows the SIP Entity for the Avaya SBCE used for PSTN destinations. The **FQDN or IP Address** field is set to the IP address of the Avaya SBCE private network interface (See **Section 7.4.1**). Set the **Adaptation** to that defined in **Section 6.4**, the **Location** to that defined for Avaya SBCE in **Section 6.3** and the **Time Zone** to the appropriate time zone.

SIP Entity Details

CommitCancel

General

* Name: Avaya SBCE

* FQDN or IP Address: 10.10.3.35

Type: SIP Trunk

Notes:

Adaptation: BTGS

Location: Session Manager

Time Zone: Europe/Dublin

* SIP Timer B/F (in seconds): 4

Minimum TLS Version: Use Global Setting

Credential name:

Securable: ☐

Call Detail Recording: egress

Loop Detection

Loop Detection Mode: On

Loop Count Threshold: 5

Loop Detection Interval (in msec): 200


6.6. Administer Entity Links

A SIP trunk between a Session Manager and another system is described by an Entity Link. To add an Entity Link, select **Entity Links** on the left panel menu and click on the **New** button (not shown). Fill in the following fields in the new row that is displayed.

- In the **Name** field enter an informative name.
- In the **SIP Entity 1** field select **Session Manager**.
- In the **Protocol** field enter the transport protocol to be used to send SIP requests.
- In the **Port** field enter the port number to which the other system sends its SIP requests.
- In the **SIP Entity 2** field enter the other SIP Entity for this link, created in **Section 6.5**.
- In the **Port** field enter the port number to which the other system expects to receive SIP requests.
- Select **Trusted** from the drop-down menu to make the other system trusted.

Click **Commit** to save changes. The following screenshot shows the Entity Links used in this configuration.

Note: The Entity Links configurations used in the compliance testing are Avaya_SBCE and Communication_Manager as per the screenshot below.

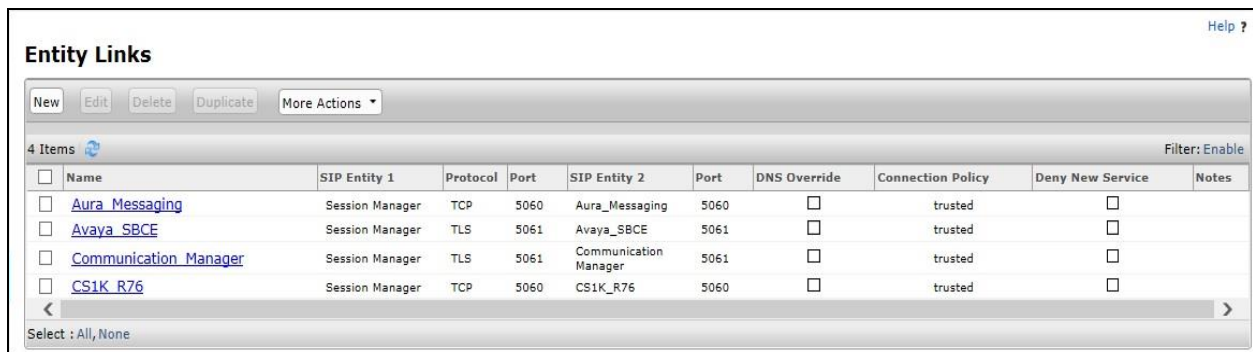

<input type="checkbox"/>	Name	SIP Entity 1	Protocol	Port	SIP Entity 2	Port	DNS Override	Connection Policy	Deny New Service	Notes
<input type="checkbox"/>	Aura_Messaging	Session Manager	TCP	5060	Aura_Messaging	5060	<input type="checkbox"/>	trusted	<input type="checkbox"/>	
<input type="checkbox"/>	Avaya_SBCE	Session Manager	TLS	5061	Avaya_SBCE	5061	<input type="checkbox"/>	trusted	<input type="checkbox"/>	
<input type="checkbox"/>	Communication_Manager	Session Manager	TLS	5061	Communication Manager	5061	<input type="checkbox"/>	trusted	<input type="checkbox"/>	
<input type="checkbox"/>	CS1K_R76	Session Manager	TCP	5060	CS1K_R76	5060	<input type="checkbox"/>	trusted	<input type="checkbox"/>	

6.7. Administer Routing Policies

Routing policies must be created to direct how calls will be routed to a system. To add a routing policy, select **Routing Policies** on the left panel menu and then click on the **New** button (not shown). Under **General**:

- Enter an informative name in the **Name** field
- Under **SIP Entity as Destination**, click **Select**, and then select the appropriate SIP entity to which this routing policy applies
- Under **Time of Day**, click **Add**, and then select the time range

The following screen shows the routing policy for inbound calls from the BT Global Services SIP Trunk to Communication Manager.

Routing Policy Details [Commit] [Cancel] Help ?

General

* Name: to_Communication_Manager

Disabled: ☐

* Retries: 0

Notes: Inbound calls to CM.

SIP Entity as Destination

Select

Name	FQDN or IP Address	Type	Notes
Communication Manager	10.10.3.44	CM	

Time of Day

Add Remove View Gaps/Overlaps

1 Item Filter: Enable

Ranking	Name	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Start Time	End Time	Notes
0	24/7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	00:00	23:59	Time Range 24/7

Select : All, None

The following screen shows the routing policy for outbound calls from Communication Manager via Avaya SBCE to the BT Global Services SIP Trunk.

Routing Policy Details [Commit] [Cancel] Help ?

General

* Name: to_Avaya_SBCE

Disabled: ☐

* Retries: 0

Notes: Outbound calls to SP via ASBCE.

SIP Entity as Destination

Select

Name	FQDN or IP Address	Type	Notes
Avaya_SBCE	10.10.3.35	SIP Trunk	

Time of Day

Add Remove View Gaps/Overlaps

1 Item Filter: Enable

Ranking	Name	Mon	Tue	Wed	Thu	Fri	Sat	Sun	Start Time	End Time	Notes
0	24/7	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	00:00	23:59	Time Range 24/7

Select : All, None

6.8. Administer Dial Patterns

A dial pattern must be defined to direct calls to the appropriate telephony system. To configure a dial pattern, select **Dial Patterns** on the left panel menu and then click on the **New** button (not shown).

Under **General**:

- In the **Pattern** field enter a dialled number or prefix to be matched.
- In the **Min** field enter the minimum length of the dialled number.
- In the **Max** field enter the maximum length of the dialled number.
- In the **SIP Domain** field select **ALL** or alternatively one of those configured in **Section 6.2**.

Under **Originating Locations and Routing Policies**:

- Click **Add**, in the resulting screen (not shown).
- Under **Originating Location**, select the location defined in **Section 6.3** or **ALL**.
- Under **Routing Policies** select one of the routing policies defined in **Section 6.7**.
- Click **Select** button to save.

The following screen shows an example dial pattern configured for outbound calls to the BT Global Services SIP platform.

Dial Pattern Details

Commit

Cancel

General

* Pattern: 00353

* Min: 5

* Max: 16

Emergency Call: ☐

SIP Domain: avaya.com

Notes:

Originating Locations and Routing Policies

Add

Remove

1 Item

<input type="checkbox"/>	Originating Location Name	Originating Location Notes	Routing Policy Name	Rank	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	Communication Manager		to_Avaya_SBCE	0	<input type="checkbox"/>	Avaya_SBCE	Outbound calls to SP via ASBCE.

Select : All, None

Denied Originating Locations

Add

Remove

0 Items

<input type="checkbox"/>	Originating Location	Notes
--------------------------	----------------------	-------

Commit

Cancel

The following screen shows the dial pattern configured for inbound calls to Communication Manager.

Dial Pattern Details

CommitCancel

Help ?

General

* Pattern: +44

* Min: 3

* Max: 16

Emergency Call: ☐

SIP Domain: avaya.com

Notes:

Originating Locations and Routing Policies

AddRemove

1 Item

Filter: Enable

<input type="checkbox"/>	Originating Location Name	Originating Location Notes	Routing Policy Name	Rank	Routing Policy Disabled	Routing Policy Destination	Routing Policy Notes
<input type="checkbox"/>	Session Manager		to_Communication_Manager	0	<input type="checkbox"/>	Communication Manager	Inbound calls to CM.

Select : All, None

Denied Originating Locations

AddRemove

0 Items


<input type="checkbox"/>	Originating Location	Notes
--------------------------	----------------------	-------

7. Configure Avaya Session Border Controller for Enterprise


This section describes the configuration of the Session Border Controller for Enterprise (Avaya SBCE). The Avaya SBCE provides security and manipulation of signalling to deliver an interface to the Service Provider's SIP Trunk that is standard where possible and adapted to the Service Provider's SIP implementation where necessary.

7.1. Access Avaya Session Border Controller for Enterprise


Access the Avaya SBCE using a web browser by entering the URL **https://<ip-address>**, where **<ip-address>** is the management IP address configured at installation and enter the **Username** and **Password**.

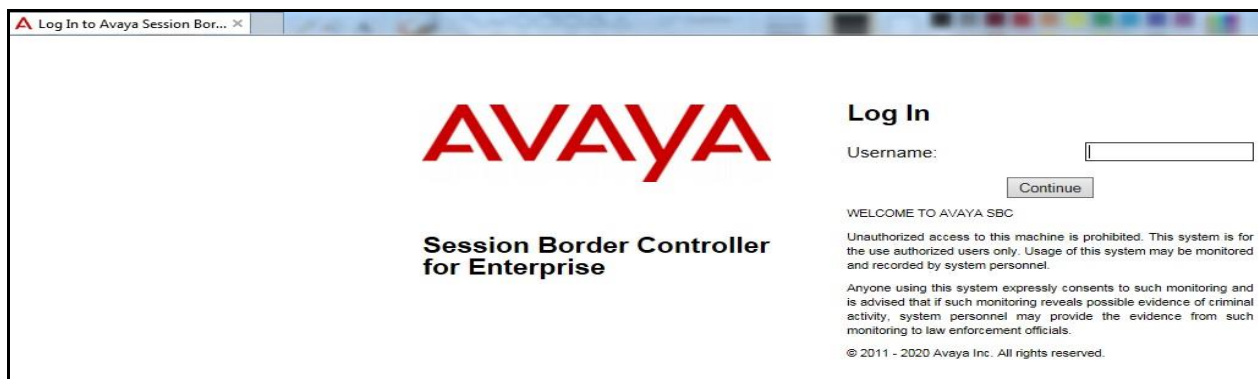


Once logged in, on the top-left of the screen, under **Device:** select the required device from the drop-down menu. with a menu on the left-hand side. In this case, **GSSCP_R10.1** is used as a starting point for all configuration of the Avaya SBCE.

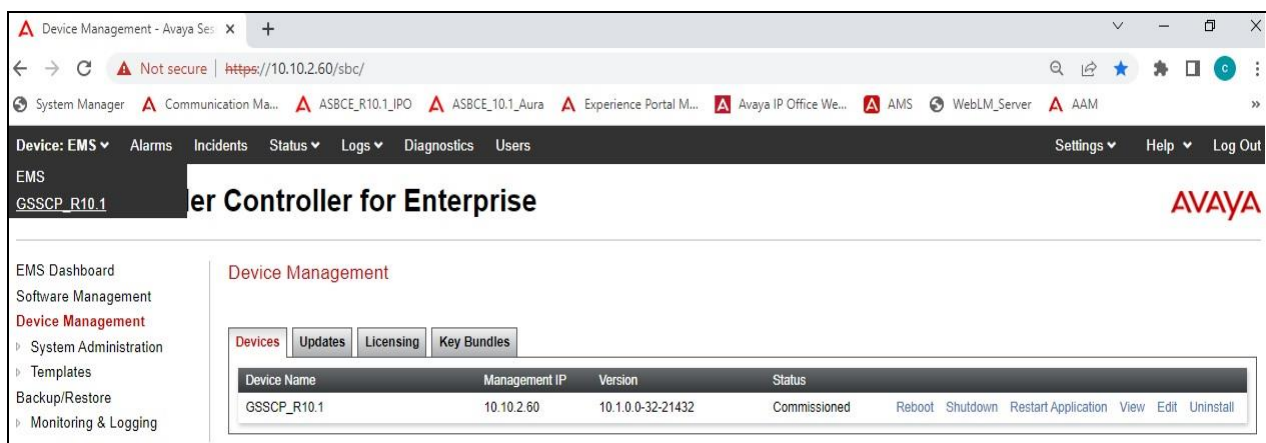

To view system information that was configured during installation, navigate to **Device Management**. A list of installed devices is shown in the right pane. In the case of the sample configuration, a single device named **GSSCP_R10.1** is shown. To view the configuration of this device, click **View** (the third option from the right).

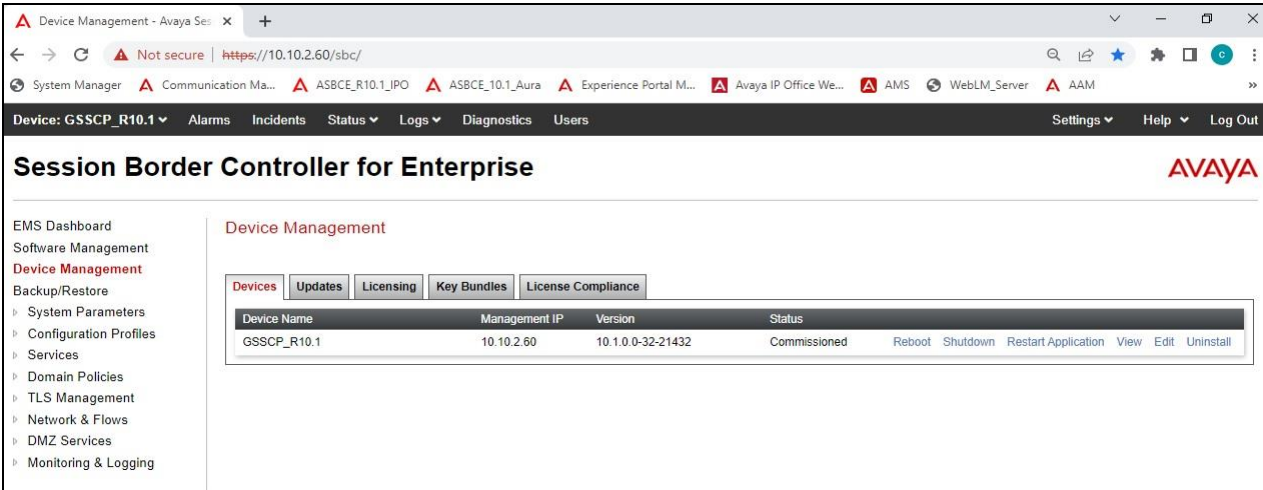

The **System Information** screen shows the **General Configuration**, **Device Configuration**, **License Allocation**, **Network Configuration**, **DNS Configuration** and **Management IP** information.

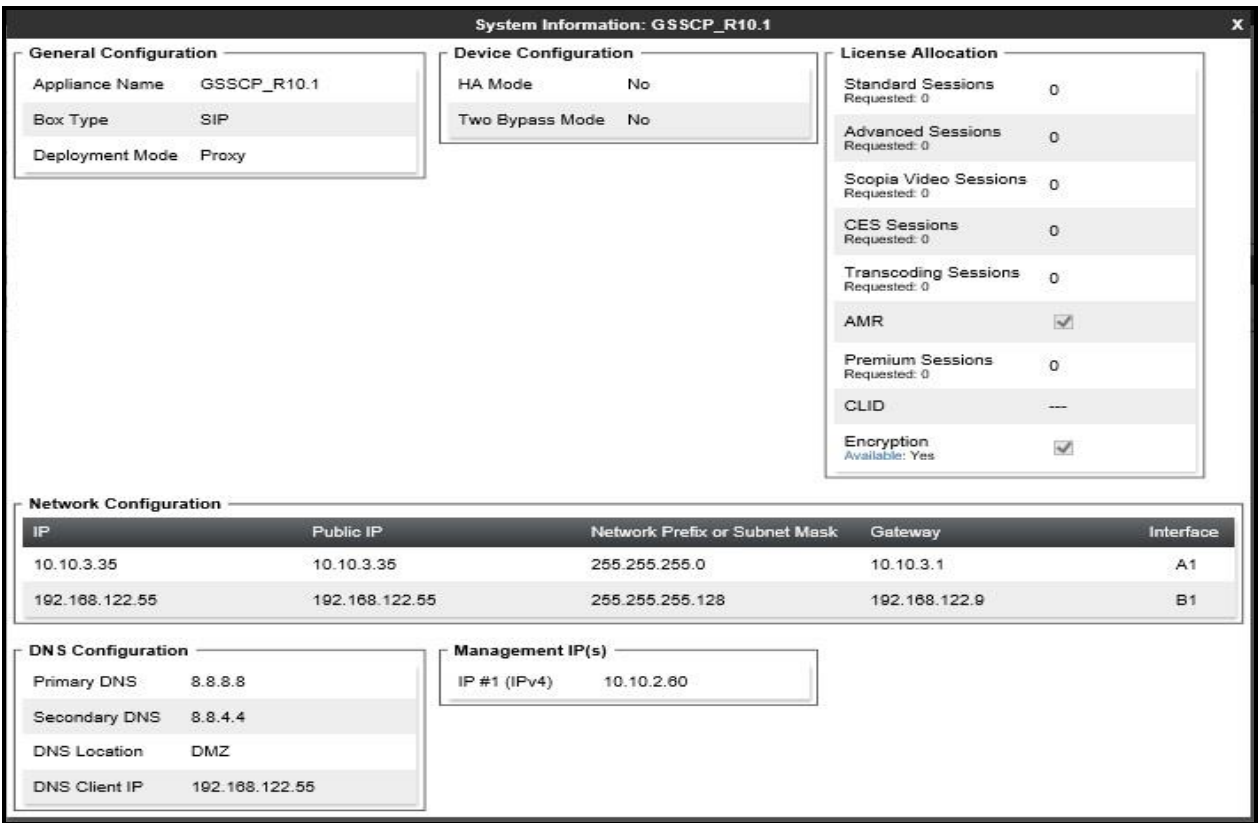

7.2. Define Network Management

Network information is required on the Avaya SBCE to allocate IP addresses and masks to the interfaces. Note that only the **A1** and **B1** interfaces are used, typically the **A1** interface is used for the internal side and **B1** is used for external.

To define the network information, navigate to **Network & Flows → Network Management** in the main menu on the left-hand side and click on **Add**. Enter details for the external interfaces in the dialogue box:

- Enter a descriptive name in the **Name** field.
- Enter the default gateway IP address for the external interfaces in the **Default Gateway** field.
- Enter the subnet mask in the **Network Prefix or Subnet Mask** field.
- Select the external physical interface to be used from the **Interface** drop down menu. In the test environment, this was **B1**.
- Click on **Add** and an additional row will appear allowing an IP address to be entered.
- Enter the external IP address of the Avaya SBCE on the SIP trunk in the **IP Address** field and leave the **Public IP** and **Gateway Override** fields blank.
- Click on **Finish** to complete the interface definition.

The screenshot shows a 'Network' dialog box with a warning banner at the top: 'Modifications to the interfaces and IP addresses are service impacting and take effect immediately. If changes are made, sessions using this network will be dropped.' Below the banner are four input fields: 'Name' (B1_External), 'Default Gateway' (192.168.122.9), 'Network Prefix or Subnet Mask' (255.255.255.0), and 'Interface' (B1). An 'Add' button is to the right of the 'Interface' field. Below these fields is a table with three columns: 'IP Address', 'Public IP', and 'Gateway Override'. The first row contains the values '192.168.122.55', 'Use IP Address', and 'Use Default'. A 'Delete' button is to the right of the first row. At the bottom of the dialog is a 'Finish' button.

IP Address	Public IP	Gateway Override
192.168.122.55	Use IP Address	Use Default

Click on **Add** to define the internal interfaces or Edit if it was defined during installation of the Avaya SBCE. Enter details in the dialogue box:

- Enter a descriptive name in the **Name** field.
- Enter the default gateway IP address for the internal interfaces in the **Default Gateway** field.
- Enter the subnet mask in the **Network Prefix or Subnet Mask** field.
- Select the internal physical interface to be used from the **Interface** drop down menu. In the test environment, this was **A1**.
- Click on **Add** and an additional row will appear allowing an IP address to be entered.
- Enter the internal IP address of the Avaya SBCE on the SIP trunk in the **IP Address** field and leave the **Public IP** and **Gateway Override** fields blank.
- Click on **Finish** to complete the interface definition.

The screenshot shows a 'Network' configuration dialog box. At the top, a warning message states: 'Modifications to the interfaces and IP addresses are service impacting and take effect immediately. If changes are made, sessions using this network will be dropped.' Below this, there are input fields for 'Name' (A1_Internal), 'Default Gateway' (10.10.3.1), 'Network Prefix or Subnet Mask' (255.255.255.0), and 'Interface' (A1). An 'Add' button is located to the right of the 'Interface' field. Below these fields is a table with three columns: 'IP Address', 'Public IP', and 'Gateway Override'. The 'IP Address' column contains the value '10.10.3.35'. The 'Public IP' column contains the text 'Use IP Address'. The 'Gateway Override' column contains the text 'Use Default'. A 'Delete' button is located to the right of the 'Gateway Override' field. At the bottom of the dialog is a 'Finish' button.


The following screenshot shows the completed Network Management configuration:

The screenshot shows the 'Network Management' page. There are two tabs: 'Interfaces' and 'Networks'. The 'Networks' tab is selected. Below the tabs is a table with the following data:

Name	Gateway	Subnet Mask / Prefix Length	Interface	IP Address	
A1_Internal	10.10.3.1	255.255.255.0	A1	10.10.3.35	Edit Delete
B1_External	192.168.122.9	255.255.255.0	B1	192.168.122.55	Edit Delete

An 'Add' button is located to the right of the table.

Select the **Interfaces** tab and click on the **Status** of the physical interface to toggle the state. Change the state to **Enabled** where required.

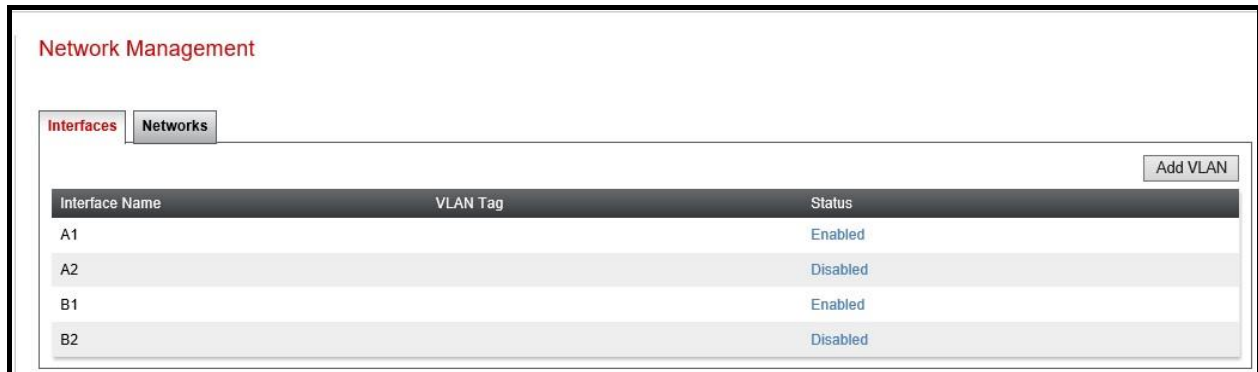

Interface Name	VLAN Tag	Status
A1		Enabled
A2		Disabled
B1		Enabled
B2		Disabled

Note: to ensure that the Avaya SBCE uses the interfaces defined, the Application must be restarted.

- Click on **Device Management** in the main menu (not shown).
- Select **Restart Application** indicated by an icon in the status bar (not shown).

A status box will appear that will indicate when the restart is complete.

7.3. Define TLS Profiles


For the compliance test, TLS transport is used for signalling on the SIP trunk between Session Manager and the Avaya SBCE. Compliance testing was done using identity certificates signed by a local certificate authority. The generation and installation of these certificates are beyond the scope of these Application Notes.

The following procedures show how to view the certificates and configure the Client and Server profiles to support the TLS connection.

7.3.1. Certificates

To view the certificates currently installed on the Avaya SBCE, navigate to **TLS Management** → **Certificates**:

- Verify that an Avaya SBCE identity certificate (**asbce40int.pem**) is present under **Installed Certificates**.
- Verify that certificate authority root certificate (**SystemManagerCA.pem**) is present under **Installed CA certificates**.
- Verify that private key associated with the identity certificate (**asbce40int.key**) is present under **Installed Keys**.

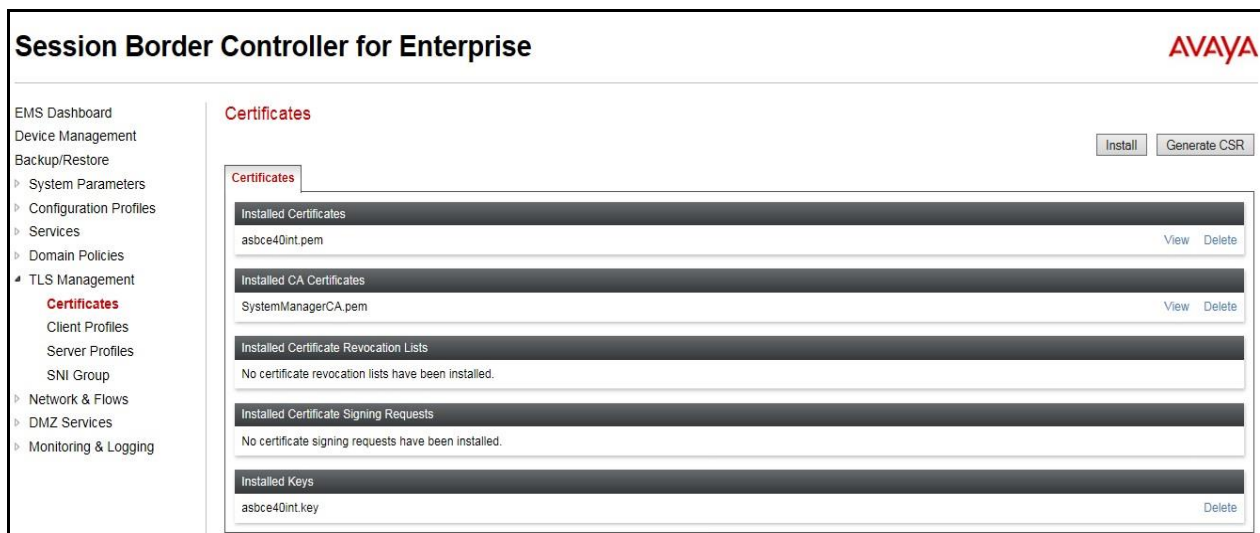

7.3.2. Client Profile

To create a new client profile, navigate to **TLS Management** → **Client Profile** in the left pane and click **Add** (not shown).

- Set **Profile Name** to a descriptive name. **GSSCP_Client** was used in the compliance testing.
- Set **Certificate** to the identity certificate **asbce40int.pem** used in the compliance testing.
- **Peer Verification** is automatically set to **Required**.
- Set **Peer Certificate Authorities** to the **SystemManagerCA.pem** identity certificate.
- Set **Verification Depth** to **1**.

Click **Next** to accept default values for the next screen and click **Finish** (not shown).

Client Profiles: GSSCP_Client

Add Delete

Client Profiles

GSSCP_Client

Click here to add a description.

Client Profile

TLS Profile

Profile Name GSSCP_Client

Certificate asbce40int.pem

SNI ☐ Enabled

Certificate Verification

Peer Verification Required

Peer Certificate Authorities SystemManagerCA.pem

Peer Certificate Revocation Lists ---

Verification Depth 1

Extended Hostname Verification ☐

Renegotiation Parameters

Renegotiation Time 0

Renegotiation Byte Count 0

Handshake Options

Version ☒ TLS 1.2 ☒ TLS 1.1 ☒ TLS 1.0

Ciphers ☒ Default ☐ FIPS ☐ Custom

Value HIGH:!DH:!ADH:!MD5:!aNULL:!eNULL:@STRENGTH

Edit

7.3.3. Server Profile

To create a new server profile, navigate to **TLS Management** → **Server Profile** in the left pane and click **Add** (not shown).

- Set **Profile Name** to a descriptive name. **GSSCP_Server** was used in the compliance testing
- Set **Certificate** to the identity certificate **asbce40int.pem** used in the compliance testing.
- Set **Peer Verification** to **Optional**.

Click **Next** to accept default values for the next screen and click **Finish** (not shown).

The screenshot shows the configuration page for a server profile named 'GSSCP_Server'. The interface includes a left sidebar with 'Server Profiles' and 'GSSCP_Server' listed. The main area is titled 'Server Profiles: GSSCP_Server' and contains a 'Server Profile' tab. The configuration is organized into several sections: 'TLS Profile' (Profile Name: GSSCP_Server, Certificate: asbce40int.pem, SNI Options: None), 'Certificate Verification' (Peer Verification: Optional, Peer Certificate Authorities: ---, Peer Certificate Revocation Lists: ---, Verification Depth: 1, Extended Hostname Verification: ☐), 'Renegotiation Parameters' (Renegotiation Time: 0, Renegotiation Byte Count: 0), and 'Handshake Options' (Version: ☒ TLS 1.2, ☒ TLS 1.1, ☒ TLS 1.0; Ciphers: ☒ Default, ☐ FIPS, ☐ Custom; Value: HIGH:!DH:!ADH:!MD5:!aNULL:!eNULL:@STRENGTH). An 'Add' button is in the top left, a 'Delete' button in the top right, and an 'Edit' button at the bottom right.

Server Profiles: GSSCP_Server	
Click here to add a description.	
Server Profile	
TLS Profile	
Profile Name	GSSCP_Server
Certificate	asbce40int.pem
SNI Options	None
Certificate Verification	
Peer Verification	Optional
Peer Certificate Authorities	---
Peer Certificate Revocation Lists	---
Verification Depth	1
Extended Hostname Verification	<input type="checkbox"/>
Renegotiation Parameters	
Renegotiation Time	0
Renegotiation Byte Count	0
Handshake Options	
Version	<input checked="" type="checkbox"/> TLS 1.2 <input checked="" type="checkbox"/> TLS 1.1 <input checked="" type="checkbox"/> TLS 1.0
Ciphers	<input checked="" type="radio"/> Default <input type="radio"/> FIPS <input type="radio"/> Custom
Value	HIGH:!DH:!ADH:!MD5:!aNULL:!eNULL:@STRENGTH

7.4. Define Interfaces

When the IP addresses and masks are assigned to the interfaces, these are then configured as signalling and media interfaces.

7.4.1. Signalling Interfaces

To define the signalling interfaces on the Avaya SBCE, navigate to **Device Specific Settings** → **Signaling Interface** from the menu on the left-hand side. Details of transport protocol and ports for the internal and external SIP signalling are entered here.

To enter details of transport protocol and ports for the SIP signalling on the internal interface:

- Select **Add** and enter details of the internal signalling interface in the pop-up menu (not shown).
- In the **Name** field enter a descriptive name for the interface.
- For **IP Address**, select the **A1_Internal** signalling interface IP addresses defined in **Section 7.2**.
- Select **TLS** port number, **5061** is used for Session Manager.
- Select a **TLS Profile** defined in **Section 7.3.3** from the drop-down menu.
- Click **Finish**.

To enter details of transport protocol and ports for the SIP signalling on the external interface:

- Select **Add** and enter details of the external signalling interface in the pop-up menu (not shown).
- In the **Name** field enter a descriptive name for the external signalling interface.
- For **IP Address**, select the **B1_external** signalling interface IP address defined in **Section 7.2**.
- Select **UDP** port number, **5060** is used for the BT Global Services SIP platform.
- Click **Finish**.

Signaling Interface						
Signaling Interface						
Add						
Name	Signaling IP Network	TCP Port	UDP Port	TLS Port	TLS Profile	
Signalling_External	192.168.122.55 B1_External (B1, VLAN 0)	---	5060	---	None	Edit Delete
Signalling_Internal	10.10.3.35 A1_Internal (A1, VLAN 0)	---	---	5061	GSSCP_Server	Edit Delete

7.4.2. Media Interfaces

To define the media interfaces on the Avaya SBCE, navigate to **Device Specific Settings** → **Media Interface** from the menu on the left-hand side. Details of the RTP and SRTP port ranges for the internal and external media streams are entered here. The IP addresses for media can be the same as those used for signalling.

To enter details of the media IP and RTP port range for the internal interface to be used in the server flow:

- Select **Add Media Interface** and enter details in the pop-up menu.
- In the **Name** field enter a descriptive name for the internal media interface.
- For **IP Address**, select the **A1_Internal** media interface IP address defined in **Section 7.2**.
- For **Port Range**, enter required values or leave as default **35000-40000**.
- Click **Finish**.

To enter details of the media IP and RTP port range on the external interface to be used in the server flow.

- Select **Add Media Interface** and enter details in the pop-up menu.
- In the **Name** field enter a descriptive name for the external media interface.
- For **IP Address**, select the **B1_External** media interface IP address defined in **Section 7.2**.
- Select **Port Range**, enter required values or leave as default **35000-40000**.
- Click **Finish**.

Media Interface			
Media Interface		Add	
Name	Media IP Network	Port Range	
Media_Internal	10.10.3.35 A1_Internal (A1, VLAN 0)	35000 - 40000	Edit Delete
Media_External	192.168.122.55 B1_External (B1, VLAN 0)	35000 - 40000	Edit Delete

7.5. Define Server Interworking

Server interworking is defined for each server connected to the Avaya SBCE. In this case, BT Global Services is connected as the Trunk Server and the Session Manager is connected as the Call Server.

7.5.1. Server Interworking Avaya

Server Interworking allows the configuration and management of various SIP call server-specific capabilities such as call hold and T.38. From the left-hand menu select **Configuration Profiles**

→ **Server Interworking** and click on **Add**.

- Enter profile name such as Avaya and click **Next** (Not Shown).
- Check **Hold Support** = **None**.
- Uncheck **SIPS Required**.
- All other options on the **General** Tab can be left at default.

General	
Hold Support	<input checked="" type="radio"/> None <input type="radio"/> RFC2543 - c=0.0.0.0 <input type="radio"/> RFC3264 - a=sendonly <input type="radio"/> Microsoft Teams
180 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
181 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
182 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
183 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
Refer Handling	<input type="checkbox"/>
URI Group	None ▼
Send Hold	<input type="checkbox"/>
Delayed Offer	<input checked="" type="checkbox"/>
3xx Handling	<input type="checkbox"/>
Diversion Header Support	<input type="checkbox"/>
Delayed SDP Handling	<input type="checkbox"/>
Re-Invite Handling	<input type="checkbox"/>
Prack Handling	<input type="checkbox"/>
Allow 18X SDP	<input type="checkbox"/>
T.38 Support	<input type="checkbox"/>
URI Scheme	<input checked="" type="radio"/> SIP <input type="radio"/> TEL <input type="radio"/> ANY
Via Header Format	<input checked="" type="radio"/> RFC3261 <input type="radio"/> RFC2543
SIPS Required	<input type="checkbox"/>
Mediasec Handling	<input type="checkbox"/>

On the **Advanced** Tab:

- Check **Record Routes = Both Sides**.
- Ensure **Extensions = Avaya**.
- Check **Has Remote SBC**.
- All other options on the **Advanced** Tab can be left at default.

Click **Finish**.

Record Routes	<input type="radio"/> None <input type="radio"/> Single Side <input checked="" type="radio"/> Both Sides <input type="radio"/> Dialog-Initiate Only (Single Side) <input type="radio"/> Dialog-Initiate Only (Both Sides)
Include End Point IP for Context Lookup	<input type="checkbox"/>
Extensions	Avaya ▼
Diversion Manipulation	<input type="checkbox"/>
Diversion Condition	None ▼
Diversion Header URI	<input type="text"/>
Has Remote SBC	<input checked="" type="checkbox"/>
Route Response on Via Port	<input type="checkbox"/>
Relay INVITE Replace for SIPREC	<input type="checkbox"/>
MOBX Re-INVITE Handling	<input type="checkbox"/>
NATing for 301/302 Redirection	<input checked="" type="checkbox"/>
DTMF	
DTMF Support	<input checked="" type="radio"/> None> <input type="radio"/> SIP Notify> <input type="radio"/> RFC 2833 Relay & SIP Notify> <input type="radio"/> SIP Info> <input type="radio"/> RFC 2833 Relay & SIP Info> <input type="radio"/> Inband>
<input type="button" value="Finish"/>	

7.5.2. Server Interworking – BT Global Services SIP Platform

Server Interworking allows the configuration and management of various SIP call server-specific capabilities such as call hold and T.38. From the left-hand menu select **Configuration Profiles**

→ **Server Interworking** and click on **Add**.

- Enter profile name such as **BT** and click **Next** (Not Shown).
- Check **Hold Support** = **None**.
- Uncheck **SIPS Required**.
- All other options on the **General** Tab can be left at default.

General	
Hold Support	<input checked="" type="radio"/> None <input type="radio"/> RFC2543 - c=0.0.0.0 <input type="radio"/> RFC3264 - a=sendonly <input type="radio"/> Microsoft Teams
180 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
181 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
182 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
183 Handling	<input checked="" type="radio"/> None <input type="radio"/> SDP <input type="radio"/> No SDP
Refer Handling	<input type="checkbox"/>
URI Group	None ▼
Send Hold	<input type="checkbox"/>
Delayed Offer	<input checked="" type="checkbox"/>
3xx Handling	<input type="checkbox"/>
Diversion Header Support	<input type="checkbox"/>
Delayed SDP Handling	<input type="checkbox"/>
Re-Invite Handling	<input type="checkbox"/>
Prack Handling	<input type="checkbox"/>
Allow 18X SDP	<input type="checkbox"/>
T.38 Support	<input type="checkbox"/>
URI Scheme	<input checked="" type="radio"/> SIP <input type="radio"/> TEL <input type="radio"/> ANY
Via Header Format	<input checked="" type="radio"/> RFC3261 <input type="radio"/> RFC2543
SIPS Required	<input type="checkbox"/>
Mediasec Handling	<input type="checkbox"/>

On the **Advanced** Tab:

- Check **Record Routes = Both Sides**.
- Ensure **Extensions = None**.
- Check **Has Remote SBC**.
- All other options on the **Advanced** Tab can be left at default.

Click **Finish**.

Record Routes

☐ None

☐ Single Side

☒ Both Sides

☐ Dialog-Initiate Only (Single Side)

☐ Dialog-Initiate Only (Both Sides)

Include End Point IP for Context Lookup ☐

Extensions None ▾

Diversion Manipulation ☐

Diversion Condition None ▾

Diversion Header URI

Has Remote SBC ☒

Route Response on Via Port ☐

Relay INVITE Replace for SIPREC ☐

MOBX Re-INVITE Handling ☐

NATing for 301/302 Redirection ☒

DTMF

DTMF Support

☒ None>

☐ SIP Notify>

☐ RFC 2833 Relay & SIP Notify>

☐ SIP Info>

☐ RFC 2833 Relay & SIP Info>

☐ Inband>

Finish

7.6. Signalling Manipulation

The Signaling Manipulation feature allows the ability to add, change and delete any of the headers in a SIP message. This feature will add the ability to configure such manipulation in a highly flexible manner using a proprietary scripting language called SigMa. The SigMa scripting language is designed to express any of the SIP header manipulation operations to be done by the Avaya SBCE

During compliance testing, an issue was also found with the handling of an Avaya specific parameter in the Contact Header. The Avaya proprietary parameter “+avaya-cm-keep-mpro=no” is present when Initial IP-IP Direct Media is enabled on Communication Manager SIP Trunk. A script was required to remove the proprietary parameter “+avaya-cm-keep-mpro” from the Contact Header.

To define the signalling manipulation to delete the Avaya proprietary parameter from the Contact Header, navigate to **Configuration Profiles → Signaling Manipulation** and click on **Add** (not shown) and enter a title. A new blank SigMa Editor window will pop up. The script text is as follows:

```
/*Script to remove attribute (+avaya-cm-keep-mpro) from Contact Header */  
  
within session "ALL"  
{  
  act on message where %DIRECTION="OUTBOUND" and %ENTRY_POINT="POST_ROUTING"  
  {  
    if (exists(%HEADERS["Contact"][1].PARAMS["+avaya-cm-keep-mpro"])) then  
    {  
      remove(%HEADERS["Contact"][1].PARAMS["+avaya-cm-keep-mpro"]);  
    }  
  }  
}
```

Once entered and saved, the script appears as shown in the following screenshot:



7.7. Define Servers

Servers are defined for each server connected to the Avaya SBCE. In this case, BT Global Services is connected as the Trunk Server and Session Manager is connected as the Call Server.

7.7.1. Server Configuration – Avaya

From the left-hand menu select **Services → SIP Servers** and click on **Add** and enter a descriptive name. On the **Add Server Configuration Profiles** tab, set the following:

- Select **Server Type** to be **Call Server**.
- Select **TLS Client Profile** to be **GSSCP_Client** as defined in **Section 7.3.2**.
- Enter **IP Address / FQDN** to **10.10.3.42** (Session Manager IP Address).
- For **Port**, enter **5061**.
- For **Transport**, select **TLS**.
- Click on **Next** (not shown) to use default entries on the **Authentication** and **Heartbeat** tabs..

The screenshot shows the 'SIP Server Profile - General' configuration window. At the top, a blue banner states: 'Server Type can not be changed while this SIP Server Profile is associated to a Server Flow.' Below this, the 'Server Type' is set to 'Call Server' (dropdown). The 'SIP Domain' field is empty. The 'DNS Query Type' is set to 'NONE/A' (dropdown). The 'TLS Client Profile' is set to 'GSSCP_Client' (dropdown). An 'Add' button is located to the right of these fields. Below a horizontal separator, there is a table with three columns: 'IP Address / FQDN', 'Port', and 'Transport'. The first row contains the values '10.10.3.42', '5061', and 'TLS' (dropdown). A 'Delete' button is located to the right of the first row.

IP Address / FQDN	Port	Transport
10.10.3.42	5061	TLS

On the **Advanced** tab:

- Check **Enable Grooming**.
- Select **Avaya** for **Interworking Profile**.
- Click **Finish**.

The screenshot shows a configuration window titled "SIP Server Profile - Advanced" with a close button (X) in the top right corner. The window contains several settings:

Enable DoS Protection	<input type="checkbox"/>
Enable Grooming	<input checked="" type="checkbox"/>
Interworking Profile	Avaya ▼
Signaling Manipulation Script	None ▼
Securable	<input type="checkbox"/>
Enable FGDN	<input type="checkbox"/>
TCP Failover Port	<input type="text"/>
TLS Failover Port	<input type="text"/>
Tolerant	<input type="checkbox"/>
URI Group	None ▼
NG911 Support	<input type="checkbox"/>

At the bottom right of the window is a "Finish" button.

7.7.2. Server Configuration – BT Global Services

To define the BT Global Services Trunk Server, navigate to **Global Profiles → Server Configuration** and click on **Add** and enter a descriptive name. On the **Add Server Configuration Profile** tab, set the following:


- Select **Server Type** to be **Trunk Server**.
- For **DNS Query Type**, select **SRV**.
- Enter **IP Address / FQDN** to supplied by the **BT Global Services SIP Platform**, **static.pub-sipt-0049.sipt.bt.com** was used for the compliance testing.
- For **Transport**, select **UDP**.
- Click on **Next** (not shown) to use default entries on the **Authentication** and **Heartbeat** tabs.

The screenshot shows the 'SIP Server Profile - General' configuration window. At the top, a blue banner states: 'Server Type can not be changed while this SIP Server Profile is associated to a Server Flow.' Below this, the 'Server Type' is set to 'Trunk Server' in a dropdown menu. The 'SIP Domain' field is empty. The 'DNS Query Type' is set to 'SRV' in a dropdown menu. The 'TLS Client Profile' is set to 'None' in a dropdown menu. An 'Add' button is located to the right of these fields. Below the main configuration area, there is a table with columns 'FQDN', 'Port', and 'Transport'. The 'FQDN' column contains the text 'static.pub-sipt-0049.sipt.bt.com'. The 'Port' column is empty. The 'Transport' column contains a dropdown menu set to 'UDP'. A 'Delete' button is located to the right of the table row.

FQDN	Port	Transport
static.pub-sipt-0049.sipt.bt.com		UDP

On the Advanced tab:

- Select **BT** for Interworking Profile.
- Select **BT_Sigma** for **Signaling Manipulation Script**.
- Click **Finish**.

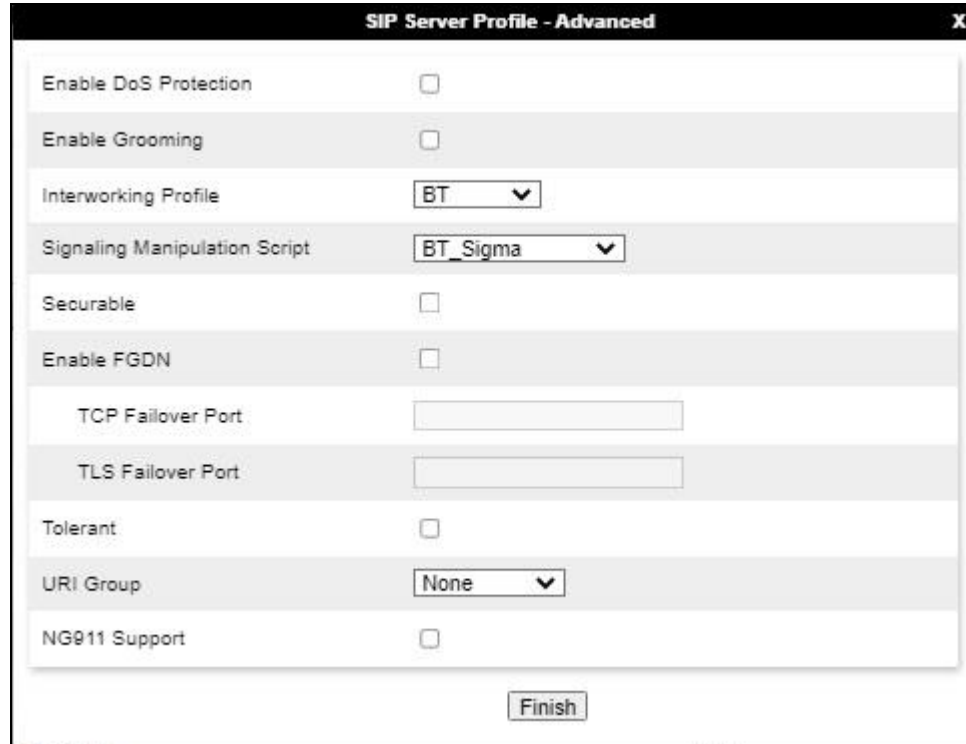

The screenshot shows a configuration window titled "SIP Server Profile - Advanced" with a close button (X) in the top right corner. The window contains several settings:

Setting	Value
Enable DoS Protection	<input type="checkbox"/>
Enable Grooming	<input type="checkbox"/>
Interworking Profile	BT
Signaling Manipulation Script	BT_Sigma
Securable	<input type="checkbox"/>
Enable FGDN	<input type="checkbox"/>
TCP Failover Port	
TLS Failover Port	
Tolerant	<input type="checkbox"/>
URI Group	None
NG911 Support	<input type="checkbox"/>

At the bottom center of the window is a button labeled "Finish".

7.8. Routing

Routing profiles define a specific set of packet routing criteria that are used in conjunction with other types of domain policies to identify a particular call flow and thereby ascertain which security features will be applied to those packets. Parameters defined by Routing Profiles include packet transport settings, name server addresses and resolution methods, next hop routing information, and packet transport types.

Routing information is required for routing to Session Manager on the internal side and BT Global Services address on the external side. The IP addresses and ports defined here will be used as the destination addresses for signalling. If no port is specified in the **Next Hop IP Address**, default 5060 is used.

7.8.1. Routing – Avaya


Create a Routing Profile for Session Manager.

- Navigate to **Global Profiles → Routing** and select **Add Profile**.
- Enter a **Profile Name** and click **Next**.



The image shows a window titled "Routing Profile" with a close button (X) in the top right corner. Inside the window, there is a text input field labeled "Profile Name" containing the text "Avaya". Below the input field is a button labeled "Next".

The Routing Profile window will open. Use the default values displayed and click **Add**.

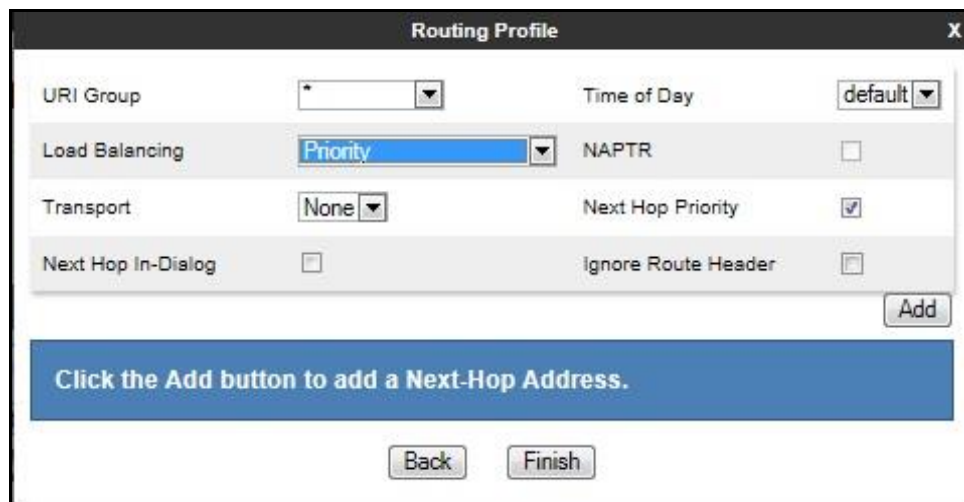

The image shows a window titled "Routing Profile" with a close button (X) in the top right corner. The window contains several settings:

- URI Group: * (dropdown)
- Time of Day: default (dropdown)
- Load Balancing: Priority (dropdown)
- NAPTR: ☐
- Transport: None (dropdown)
- Next Hop Priority: ☒
- Next Hop In-Dialog: ☐
- Ignore Route Header: ☐

Below the settings is a blue button labeled "Add". At the bottom of the window, there is a blue banner with the text "Click the Add button to add a Next-Hop Address." and two buttons labeled "Back" and "Finish".

On the **Next Hop Address** window, set the following:

- **Priority/Weight = 1.**
- **Server Configuration = Avaya (Section 7.7.1)** from drop down menu.
- **Next Hop Address = Select 10.10.3.42:5061(TLS)** from drop down menu.
- Click **Finish**.

Profile : Avaya

URI Group	*	Time of Day	default
Load Balancing	Priority	NAPTR	<input type="checkbox"/>
Transport	None	LDAP Routing	<input type="checkbox"/>
LDAP Server Profile	None	LDAP Base DN (Search)	None
Matched Attribute Priority	<input type="checkbox"/>	Alternate Routing	<input type="checkbox"/>
Next Hop Priority	<input checked="" type="checkbox"/>	Next Hop In-Dialog	<input type="checkbox"/>
Ignore Route Header	<input type="checkbox"/>		
ENUM	<input type="checkbox"/>	ENUM Suffix	

Add

Priority / Weight	LDAP Search Attribute	LDAP Search Regex Pattern	LDAP Search Regex Result	SIP Server Profile	Next Hop Address	Transport
1				Avaya	10.10.3.42:5061 (TLS)	None

Finish **Delete**

7.8.2. Routing – BT Global Services

Create a Routing Profile for BT Global Services SIP network.

- Navigate to **Global Profiles → Routing** and select **Add Profile**.
- Enter a **Profile Name** and click **Next**.

Routing Profile

Profile Name: BT

Next

The Routing Profile window will open. Use the default values displayed and click **Add**.



The screenshot shows the 'Routing Profile' window. It contains the following fields and controls:

- URI Group:** A dropdown menu with an asterisk (*) as the selected value.
- Time of Day:** A dropdown menu with 'default' as the selected value.
- Load Balancing:** A dropdown menu with 'Priority' as the selected value.
- NAPTR:** An unchecked checkbox.
- Transport:** A dropdown menu with 'None' as the selected value.
- Next Hop Priority:** A checked checkbox.
- Next Hop In-Dialog:** An unchecked checkbox.
- Ignore Route Header:** An unchecked checkbox.
- Add:** A button located at the bottom right of the configuration area.
- Instruction:** A blue banner with the text 'Click the Add button to add a Next-Hop Address.'
- Back:** A button at the bottom left.
- Finish:** A button at the bottom right.

On the **Next Hop Address** window, set the following:

- **Load Balancing** = DNS/SRV.
- **SIP Server Profile** = BT (Section 7.7.2) from drop down menu.
- **Next Hop Address** = Select **static.pub-sipt-0049.sipt.bt.com (UDP)** from drop down menu.
- Click **Finish**.



The screenshot shows the 'Profile : BT' window. It contains the following fields and controls:

- URI Group:** A dropdown menu with an asterisk (*) as the selected value.
- Time of Day:** A dropdown menu with 'default' as the selected value.
- Load Balancing:** A dropdown menu with 'DNS/SRV' as the selected value.
- NAPTR:** An unchecked checkbox.
- Transport:** A dropdown menu with 'None' as the selected value.
- LDAP Server Profile:** A dropdown menu with 'None' as the selected value.
- LDAP Base DN (Search):** A dropdown menu with 'None' as the selected value.
- Matched Attribute Priority:** An unchecked checkbox.
- Alternate Routing:** An unchecked checkbox.
- Next Hop Priority:** An unchecked checkbox.
- Next Hop In-Dialog:** An unchecked checkbox.
- Ignore Route Header:** An unchecked checkbox.
- ENUM:** An unchecked checkbox.
- ENUM Suffix:** A text input field.
- Add:** A button located at the bottom right of the configuration area.
- Table:** A table with 7 columns: Priority / Weight, LDAP Search Attribute, LDAP Search Regex Pattern, LDAP Search Regex Result, SIP Server Profile, Next Hop Address, and Transport. The first row contains the values: (empty), (empty), (empty), (empty), BT, static.pub-sipt-0049.sipt.bt.com (UDP), and None. A 'Delete' button is located to the right of the table.
- Finish:** A button at the bottom center.

7.9. Topology Hiding

Topology hiding is used to hide local information such as private IP addresses and local domain names. The local information can be overwritten with a domain name or IP addresses. The default **Replace Action** is **Auto**, this replaces local information with IP addresses, generally the next hop. Topology hiding has the advantage of presenting single Via and Record-Route headers externally where multiple headers may be received from the enterprise. In some cases where Topology Hiding cannot be applied, in particular the Contact header, IP addresses are translated to the Avaya SBCE external addresses using NAT.

To define Topology Hiding for Session Manager, navigate to **Global Profiles** → **Topology Hiding** from menu on the left-hand side. Click on **Add** and enter details in the **Topology Hiding Profile** pop-up menu (not shown).

- Enter a descriptive Profile Name such as **Avaya**.
- If the required Header is not shown, click on **Add Header**.
- Under the **Header** field for **To**, **From** and **Request Line**, select **IP/Domain** under **Criteria** and **Overwrite** under **Replace Action**. For Overwrite value, insert **avaya.com**.
- Click **Finish** (not shown).

Topology Hiding Profiles: Avaya

Add

RenameCloneDelete

Topology Hiding Profiles

default

cisco_th_profile

Avaya

BT

Click here to add a description.

Topology Hiding

Header	Criteria	Replace Action	Overwrite Value
SDP	IP/Domain	Auto	---
Via	IP/Domain	Auto	---
Refer-To	IP/Domain	Auto	---
From	IP/Domain	Overwrite	avaya.com
Record-Route	IP/Domain	Auto	---
Referred-By	IP/Domain	Auto	---
Request-Line	IP/Domain	Overwrite	avaya.com
To	IP/Domain	Overwrite	avaya.com

Edit

To define Topology Hiding for BT Global Services, navigate to **Global Profiles → Topology Hiding** from the menu on the left-hand side. Click on **Add** and enter details in the **Topology Hiding Profile** pop-up menu (not shown).

- In the **Profile Name** field enter a descriptive name for BT Global Services and click **Next**.
- If the required Header is not shown, click on **Add Header**.
- Under the **Header** field for **To**, **From** and **Request Line**, select **IP/Domain** under **Criteria** and **Auto** under **Replace Action**.
- Click **Finish** (not shown).

Topology Hiding Profiles: BT

Add
Rename
Clone
Delete

Topology Hiding Profiles

default

cisco_th_profile

Avaya

BT

Click here to add a description.

Topology Hiding

Header	Criteria	Replace Action	Overwrite Value
SDP	IP/Domain	Auto	---
Via	IP/Domain	Auto	---
Refer-To	IP/Domain	Auto	---
From	IP/Domain	Auto	---
Record-Route	IP/Domain	Auto	---
Referred-By	IP/Domain	Auto	---
Request-Line	IP/Domain	Auto	---
To	IP/Domain	Auto	---

Edit

7.10.Domain Policies

Domain Policies allow the configuration of sets of rules designed to control and normalize the behavior of call flows, based upon various criteria of communication sessions originating from or terminating in the enterprise. Domain Policies include rules for Application, Media, Signaling, Security, etc.

In the reference configuration, only new Media Rules were defined. All other rules under Domain Policies, linked together on End Point Policy Groups later in this section, used one of the default sets already pre-defined in the configuration. Please note that changes should not be made to any of the defaults. If changes are needed, it is recommended to create a new rule by cloning one the defaults and then make the necessary changes to the new rule.

CMN; Reviewed:
SPOC 6/3/2023

Solution & Interoperability Test Lab Application Notes
©2023 Avaya Inc. All Rights Reserved.

58 of 70
BTGSAuraSBC10

7.10.1. Media Rules

A media rule defines the processing to be applied to the selected media. For the compliance test, a media rule was created for Session Manager to use SRTP, while the predefined **default-low-med** media rule was used for the BT SIP trunk.

To define the Media Rule for Session Manager, navigate to **Domain Policies → Media Rules** in the main menu on the left-hand side. Click on **Add** and enter details in the Media Rule pop-up box (not shown)

- In the **Rule Name** field enter a descriptive name such as **Avaya_SRTP**.
- Set **Preferred Format #1** to **SRTP_AES_CM_128_HMAC_SHA1_80**.
- Set **Preferred Format #2** to **RTP**.
- Uncheck **Encrypted RTCP**.
- Check **Capability Negotiation** under **Miscellaneous**.

Default values were used for all other fields. Click **Finish** (not shown).

The screenshot shows the 'Media Rules: Avaya_SRTP' configuration window. On the left is a sidebar with a 'Media Rules' section containing a list of rules: 'default-low-med', 'default-low-med-enc', 'default-high', 'default-high-enc', 'avaya-low-med-enc', and 'Avaya_SRTP' (highlighted in red). Above this list is an 'Add' button. The main area of the window has a title bar with 'Rename', 'Clone', and 'Delete' buttons. Below the title bar is a blue bar with the text 'Click here to add a description.' Underneath are four tabs: 'Encryption' (selected), 'Codec Prioritization', 'Advanced', and 'QoS'. The 'Encryption' tab is divided into three sections: 'Audio Encryption', 'Video Encryption', and 'Miscellaneous'. The 'Audio Encryption' section includes fields for 'Preferred Formats' (SRTP_AES_CM_128_HMAC_SHA1_80, RTP), 'Encrypted RTCP' (unchecked), 'MKI' (unchecked), 'Lifetime' (Any), 'Interworking' (unchecked), 'Symmetric Context Reset' (checked), and 'Key Change in New Offer' (unchecked). The 'Video Encryption' section includes 'Preferred Formats' (RTP), 'Interworking' (unchecked), 'Symmetric Context Reset' (checked), and 'Key Change in New Offer' (unchecked). The 'Miscellaneous' section includes 'Capability Negotiation' (checked). An 'Edit' button is located at the bottom right of the main area.

Audio Encryption	
Preferred Formats	SRTP_AES_CM_128_HMAC_SHA1_80 RTP
Encrypted RTCP	<input type="checkbox"/>
MKI	<input type="checkbox"/>
Lifetime	Any
Interworking	<input type="checkbox"/>
Symmetric Context Reset	<input checked="" type="checkbox"/>
Key Change in New Offer	<input type="checkbox"/>

Video Encryption	
Preferred Formats	RTP
Interworking	<input type="checkbox"/>
Symmetric Context Reset	<input checked="" type="checkbox"/>
Key Change in New Offer	<input type="checkbox"/>

Miscellaneous	
Capability Negotiation	<input checked="" type="checkbox"/>

For the compliance test, the default media rule **default-low-med** was used for BT Global Services.

Media Rules: default-low-med

Add

Clone

Media Rules

default-low-med

default-low-med-enc

default-high

default-high-enc

avaya-low-med-enc

Avaya_SRTP

It is not recommended to edit the defaults. Try cloning or adding a new rule instead.

Encryption

Codec Prioritization

Advanced

QoS

Audio Encryption

Preferred FormatsRTP

Interworking☒

Symmetric Context Reset☒

Key Change in New Offer☐

Video Encryption

Preferred FormatsRTP

Interworking☒

Symmetric Context Reset☒

Key Change in New Offer☐

Miscellaneous

Capability Negotiation☐

Edit

7.11. End Point Policy Groups


An end point policy group is a set of policies that will be applied to traffic between the Avaya SBCE and a signaling endpoint (connected server). Thus, one end point policy group must be created for Session Manager and another for the BT Global Services SIP Trunk. The end point policy group is applied to the traffic as part of the end point flow defined in **Section 7.11**.

7.11.1. End Point Policy Group – Session Manager

To define an End Point policy for Session Manager, navigate to **Domain Policies → End Point Policy Groups** in the main menu on the left-hand side. Click on **Add** and enter details in the Policy Group pop-up box (not shown).

- In the **Group Name** field enter a descriptive name, in this case **Avaya**, and click **Next** (not shown).
- Leave the **Application Rule**, **Border Rule**, **Security Rule** and **Signalling Rule** fields at their default values.
- In the **Media Rule** drop down menu, select the recently added Media Rule called **Avaya_SRTP**.

Click **Finish**.

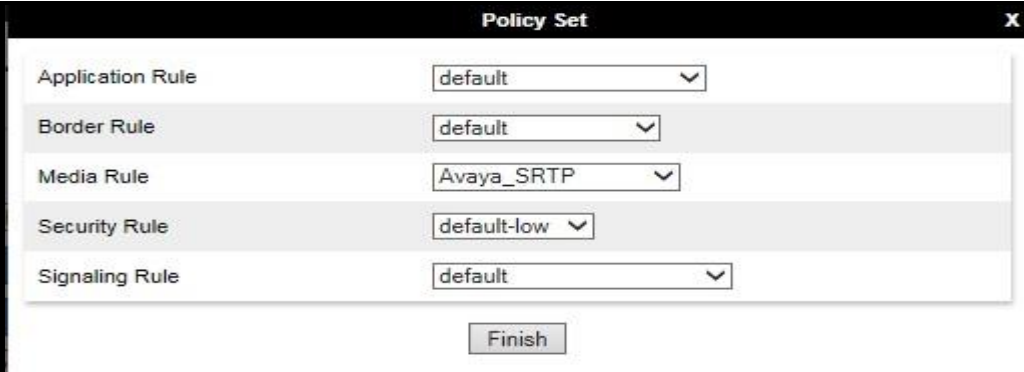


The screenshot shows a 'Policy Set' dialog box with a close button (X) in the top right corner. It contains five rows of configuration options, each with a label and a dropdown menu:

Label	Value
Application Rule	default
Border Rule	default
Media Rule	Avaya_SRTP
Security Rule	default-low
Signaling Rule	default

At the bottom center of the dialog is a 'Finish' button.

7.11.2. End Point Policy Group – BT Global Services

For the compliance test, the predefined End Point Policy **default-low** was used for the BT Global Services End Point Policy Group.

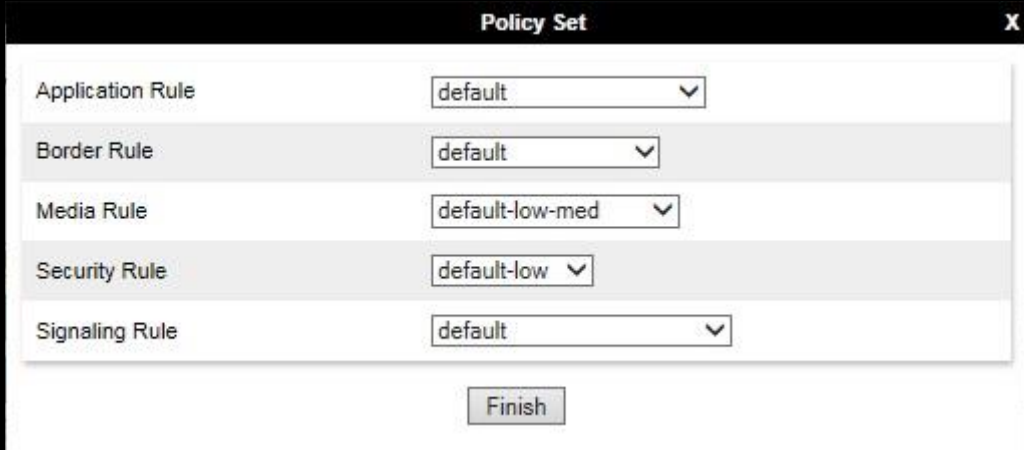


The screenshot shows a 'Policy Set' configuration window with a black title bar and a close button (X) in the top right corner. The window contains a list of five rules, each with a corresponding dropdown menu. The rules and their selected values are: Application Rule (default), Border Rule (default), Media Rule (default-low-med), Security Rule (default-low), and Signaling Rule (default). The rows for Border Rule, Security Rule, and Signaling Rule are highlighted in light gray. A 'Finish' button is located at the bottom center of the window.

Rule Type	Selected Policy
Application Rule	default
Border Rule	default
Media Rule	default-low-med
Security Rule	default-low
Signaling Rule	default

Finish

7.12. Server Flows

Server Flows combine the previously defined profiles into outgoing flows from Session Manager to BT Global Service's SIP Trunk and incoming flows from BT Global Services SIP Trunk to Session Manager. This configuration ties all the previously entered information together so that signalling can be routed from Session Manager to the PSTN via the BT Global Services network and vice versa. The following screen illustrates the flow through the Avaya SBCE to secure a SIP Trunk call.

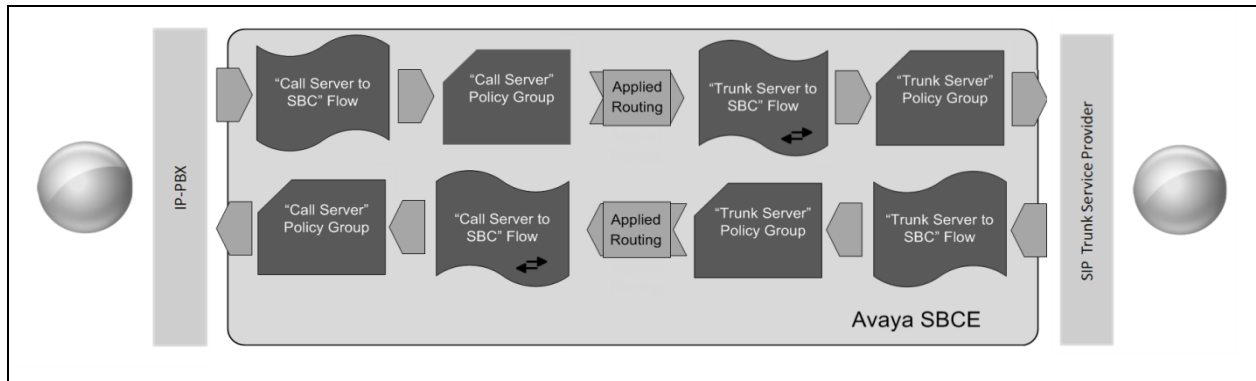

The following screenshot shows all configured flows.

End Point Flows

Subscriber Flows | **Server Flows** | Add

Modifications made to a Server Flow will only take effect on new sessions.

Hover over a row to see its description.

SIP Server: Avaya

Priority	Flow Name	URI Group	Received Interface	Signaling Interface	End Point Policy Group	Routing Profile	
1	Call_Server	*	Signaling_External	Signaling_Internal	Avaya	BT	View Clone Edit Delete

SIP Server: BT

Priority	Flow Name	URI Group	Received Interface	Signaling Interface	End Point Policy Group	Routing Profile	
1	Trunk_Server	*	Signaling_Internal	Signaling_External	default-low	Avaya	View Clone Edit Delete

To define a Server Flow for the BT Global Services SIP platform, navigate to **Device Specific Settings → End Point Flows**.

- Click on the **Server Flows** tab.
- Select **Add Flow** and enter details in the pop-up menu.
- In the **Name** field enter a descriptive name for the server flow for BT Global Services SIP platform, in the test environment **Trunk_Server** was used.
- In the **Server Configuration** drop-down menu, select the BT Global Services server configuration defined in **Section 7.7.2**.
- In the **Received Interface** drop-down menu, select the internal SIP signalling interface defined in **Section 7.4.1**.
- In the **Signaling Interface** drop-down menu, select the external SIP signalling interface defined in **Section 7.4.1**.
- In the **Media Interface** drop-down menu, select the external media interface defined in **Section 7.4.2**.
- Set the **End Point Policy Group** to the endpoint policy group **default-low**.
- In the **Routing Profile** drop-down menu, select the routing profile of the Session Manager defined in **Section 7.8.1**.
- In the **Topology Hiding Profile** drop-down menu, select the topology hiding profile of the BT Global Services SIP platform defined in **Section 7.9** and click **Finish** (not shown).

The screenshot shows a configuration window titled "Flow: Trunk_Server". It contains two main sections: "Criteria" and "Profile".

Criteria	
Flow Name	Trunk_Server
Server Configuration	BT
URI Group	*
Transport	*
Remote Subnet	*
Received Interface	Signaling_Internal

Profile	
Signaling Interface	Signaling_External
Media Interface	Media_External
Secondary Media Interface	None
End Point Policy Group	default-low
Routing Profile	Avaya
Topology Hiding Profile	BT
Signaling Manipulation Script	None
Remote Branch Office	Any
Link Monitoring from Peer	<input type="checkbox"/>
FQDN Support	<input type="checkbox"/>

To define a server flow for Session Manager, navigate to **Device Specific Settings → End Point Flows**.

- Click on the **Server Flows** tab.
- Select **Add Flow** and enter details in the pop-up menu.
- In the **Name** field enter a descriptive name for the server flow for Session Manager, in the test environment **Call_Server** was used.
- In the **Server Configuration** drop-down menu, select the server configuration for Session Manager defined in **Section 7.7.1**.
- In the **Received Interface** drop-down menu, select the external SIP signalling interface defined in **Section 7.4.1**.
- In the **Signaling Interface** drop-down menu, select the internal SIP signalling interface defined in **Section 7.4.1**.
- In the **Media Interface** drop-down menu, select the internal media interface defined in **Section 7.4.2**.
- Set the **End Point Policy Group** to the endpoint policy group **default-low**.
- In the **Routing Profile** drop-down menu, select the routing profile of the BT Global Services SIP platform defined in **Section 7.8.2**.
- In the **Topology Hiding Profile** drop-down menu, select the topology hiding profile of Session Manager defined in **Section 7.9** and click **Finish** (not shown).

The screenshot shows a configuration window titled "Flow: Call_Server". It has two main sections: "Criteria" and "Profile".

Criteria	
Flow Name	Call_Server
Server Configuration	Avaya
URI Group	*
Transport	*
Remote Subnet	*
Received Interface	Signaling_External

Profile	
Signaling Interface	Signaling_Internal
Media Interface	Media_Internal
Secondary Media Interface	None
End Point Policy Group	Avaya
Routing Profile	BT
Topology Hiding Profile	Avaya
Signaling Manipulation Script	None
Remote Branch Office	Any
Link Monitoring from Peer	<input type="checkbox"/>
FQDN Support	<input type="checkbox"/>

8. Configure the BT Global Services SIP Equipment

The configuration of the BT Global Services OneVoice SIP Trunk UK equipment used to support the SIP Trunk is outside the scope of these Application Notes and will not be covered. To obtain further information on BT equipment and system configuration please contact an authorised BT representative.

9. Verification Steps

This section provides steps that may be performed to verify that the solution is configured correctly.

1. From System Manager **Home** tab click on **Session Manager** and navigate to **Session Manager → System Status → SIP Entity Monitoring**. Select the relevant SIP Entities from the list and observe if the **Conn Status** and **Link Status** are showing as **UP**.

Session Manager Entity Link Connection Status									
This page displays detailed connection status for all entity links from a Session Manager.									
Status Details for the selected Session Manager: Time Last Down: 12/09/19 11:10:34 Last Message Sent: 12/10/19 10:44:38 Time Last Up: 12/09/19 11:25:56 Last Response Latency (ms): 21									
All Entity Links for Session Manager: Session Manager									
Summary View									
4 Items Filter: Enable									
	SIP Entity Name	IP Address Family	SIP Entity Resolved IP	Port	Proto.	Deny	Conn. Status	Reason Code	Link Status
<input type="radio"/>	Avaya SBCE	IPv4	10.10.3.30	5061	TLS	FALSE	UP	200 OK	UP
<input type="radio"/>	Communication Manager	IPv4	10.10.3.44	5061	TLS	FALSE	UP	200 OK	UP

2. From Communication Manager SAT interface run the command **status trunk n** where **n** is a previously configured SIP trunk. Observe if all channels on the trunk group display **in-service/idle**.

status trunk 1			
TRUNK GROUP STATUS			
Member	Port	Service State	Mtce Connected Ports Busy
0002/001	T00011	in-service/idle	no
0002/002	T00012	in-service/idle	no
0002/003	T00013	in-service/idle	no
0002/004	T00014	in-service/idle	no
0002/005	T00015	in-service/idle	no
0002/006	T00016	in-service/idle	no

3. Verify that endpoints at the enterprise site can place calls to the PSTN and that the call remains active.
4. Verify that endpoints at the enterprise site can receive calls from the PSTN and that the call can remain active.
5. Verify that the user on the PSTN can end an active call by hanging up.
6. Verify that an endpoint at the enterprise site can end an active call by hanging up.
7. Should issues arise with the SIP trunk, use the Avaya SBCE trace facility to check that the OPTIONS requests sent from Session Manager via the Avaya SBCE to the network SBCs are receiving a response.

To define the trace, navigate to **Device Management → Monitoring & Logging → Trace** in the main menu on the left-hand side and select the **Packet Capture** tab.

- Select the SIP Trunk interface from the **Interface** drop down menu.
- Select the signalling interface IP address or “All” from the **Local Address** drop down menu.
- Enter the IP address of the network SBC in the **Remote Address** field or enter a * to capture all traffic.
- Specify the **Maximum Number of Packets to Capture**, **10000** is shown as an example.
- Specify the filename of the resultant pcap file in the **Capture Filename** field.
- Click on **Start Capture**.

Trace: GSSCP_R10.1


Packet Capture Captures

Packet Capture Configuration

Status	Ready
Interface	B1 ▾
Local Address IP[:Port]	All ▾ : <input type="text"/>
Remote Address *, *:Port, IP, IP:Port	<input type="text" value="*"/>
Protocol	UDP ▾
Maximum Number of Packets to Capture	<input type="text" value="10000"/>
Capture Filename Using the name of an existing capture will overwrite it.	<input type="text" value="test.pcap"/>

Start Capture Clear

To view the trace, select the **Captures** tab and click on the relevant filename in the list of traces.

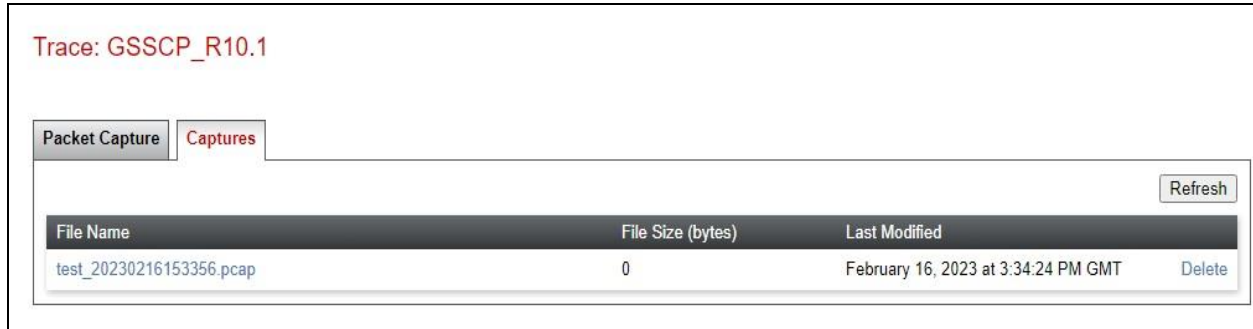

The trace is viewed as a standard pcap file in Wireshark. If the SIP trunk is working correctly, a SIP response to OPTIONS in the form of a 200 OK will be seen from the BT Global Services network.

10. Conclusion

These Application Notes describe the configuration necessary to connect Avaya Aura ® Communication Manager R10.1, Avaya Aura ® Session Manager 10.1 and Avaya Session Border Controller for Enterprise R10.1 to the BT Global Services OneVoice SIP Trunk UK.

The BT Global Services OneVoice SIP Trunk UK is a SIP-based Voice over IP solution providing businesses a flexible, cost-saving alternative to traditional hardwired telephony trunks. The service was successfully tested with a number of observations listed in **Section 2.2**.

11. Additional References

This section references the documentation relevant to these Application Notes. Additional Avaya product documentation is available at <http://support.avaya.com>.

- [1] *Deploying Avaya Appliance Virtualization Platform*, Release 10.1, Jan 2023
- [2] *Upgrading Avaya Aura® applications*, Release 10.1, Jan 2023
- [3] *Deploying Avaya Aura® applications from System Manager*, Release 10.1, Jan 2023
- [4] *Deploying Avaya Aura® Communication Manager*, Release 10.1, Jan 2023
- [5] *Administering Avaya Aura® Communication Manager*, Release 10.1, Feb 2023
- [6] *Upgrading Avaya Aura® Communication Manager*, Release 10.1, Jan 2023
- [7] *Deploying Avaya Aura® System Manager*, Release 10.1, Feb 2023
- [8] *Upgrading Avaya Aura® System Manager*, Release 10.1, Feb 2023
- [9] *Administering Avaya Aura® System Manager*, Release 10.1, Feb 2023
- [10] *Deploying Avaya Aura® Session Manager*, Release 10.1 Feb 2023
- [11] *Upgrading Avaya Aura® Session Manager*, Release 10.1, Feb 2023
- [12] *Administering Avaya Aura® Session Manager*, Release 10.1, Feb 2023
- [13] *Deploying Avaya Session Border Controller for Enterprise*, Release 10.1, Jan 2023
- [14] *Upgrading Avaya Session Border Controller for Enterprise*, Release 10.1 Jan 2023
- [15] *Administering Avaya Session Border Controller for Enterprise*, Release 10.1, Jan 2023
- [16] *RFC 3261 SIP: Session Initiation Protocol*, <http://www.ietf.org/>

©2023 Avaya Inc. All Rights Reserved.

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at devconnect@avaya.com.