



## **Avaya Solution & Interoperability Test Lab**

---

# **Application Notes for Configuring Avaya Aura® Communication Manager R7.1 and Avaya Aura® Application Enablement Services R7.1 to interoperate with Red Box Recorder's Quantify 4B SP2 using Multiple Registration – Issue 1.0**

## **Abstract**

The Application Notes describe the configuration steps for Red Box Recorders Quantify 4B SP2 solution with Avaya Aura® Communication Manager R7.1 and Avaya Aura® Application Enablement Services R7.1. Red Box Recorders Quantify 4B SP2 system is a voice recording solution which can be used to record voice streams for Avaya telephony

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

# 1. Introduction

The purpose of this document is to describe the compliance testing carried out using the Multiple Device Registration recording method on Red Box Recorder Quantify (Quantify) with Avaya Aura® Communication Manager (Communication Manager) and Avaya Aura® Application Enablement Services (AES). It includes a description of the configuration of both the Avaya and the Quantify solutions, a description of the tests that were performed and a summary of the results of those tests.

Quantify is a voice recording system which can be used to record the voice stream of Avaya telephony endpoints. In this compliance test, it uses Communication Manager's Multiple Device Registration feature via the AES Device, Media, and Call Control (DMCC) interface to capture the audio and call details for call recording. The application uses the AES DMCC service to register the extensions that are to be recorded. When the extension receives an event pertaining to the start of a call, the application receives the extensions RTP media stream.

The Quantify solution comprises of Red Box Recorder's Server licensed for Avaya "Active" recording.

# 2. General Test Approach and Test Results

The test approach was to verify that the calls placed and recorded using the Quantify solution with Avaya solution functioned correctly with good audio quality received. Functionality testing included basic telephony operations such as answer, hold/retrieve, transfer, conference, call pick-up, call park and calls to/from the PSTN. Tests also included ACD Agent Recording. All tests were successful.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution.

Avaya recommends our customers implement Avaya solutions using appropriate security and encryption capabilities enabled by our products. The testing referenced in these DevConnect Application Notes included the enablement of supported encryption capabilities in the Avaya products. Readers should consult the appropriate Avaya product documentation for further information regarding security and encryption capabilities supported by those Avaya products.

Support for these security and encryption capabilities in any non-Avaya solution component is the responsibility of each individual vendor. Readers should consult the appropriate vendor-supplied product documentation for more information regarding those products.

For the testing associated with these Application Notes, the interface between Avaya systems and Quantify did not include use of any specific encryption features as requested by Red Box Recorders.

## **2.1. Interoperability Compliance Testing**

The interoperability compliance test included both feature functionality and serviceability testing. The feature functionality testing focused on placing and recording calls in different call scenarios to ensure good quality audio recordings were received. Intra-switch calls were made on the Communication Manager, along with inbound and outbound calls from/to the PSTN. The serviceability testing focused on verifying the ability of Quantify to recover from disconnection and reconnection of the Avaya solution.

## **2.2. Test Results**

All functionality and serviceability test cases were completed successfully with the following observation.

- When a call is transferred using the consult method the recording contained three calls. Quantify shows the initial call, the consult, and the consult and transferred call. The call containing the consult and transferred call displays as being between the called and transferred party and does not indicate there is a call between the caller and transferred party. This working as designed with Red Box Recorders having no plan for a fix.


## **2.3. Support**

Technical support can be obtained for Red Box Recorder's solution as follows:

- Email: [support@redboxrecorders.com](mailto:support@redboxrecorders.com)
- Website: [www.redboxrecorders.com](http://www.redboxrecorders.com)
- Phone: +44 (0) 115 9377100

### 3. Reference Configuration

**Figure 1** illustrates the network topology used during compliance testing. The Avaya solution consists of an Avaya Aura® Communication Manager with Avaya G430 Media Gateway as the PBX and Avaya Aura® Application Enablement Services. Avaya 96x1 series IP telephones and 9400 series Digital telephones are connected to the PBX and used in the testing. The Quantify server was used in the compliance test. The system is installed on a Windows 2012 R2 server.

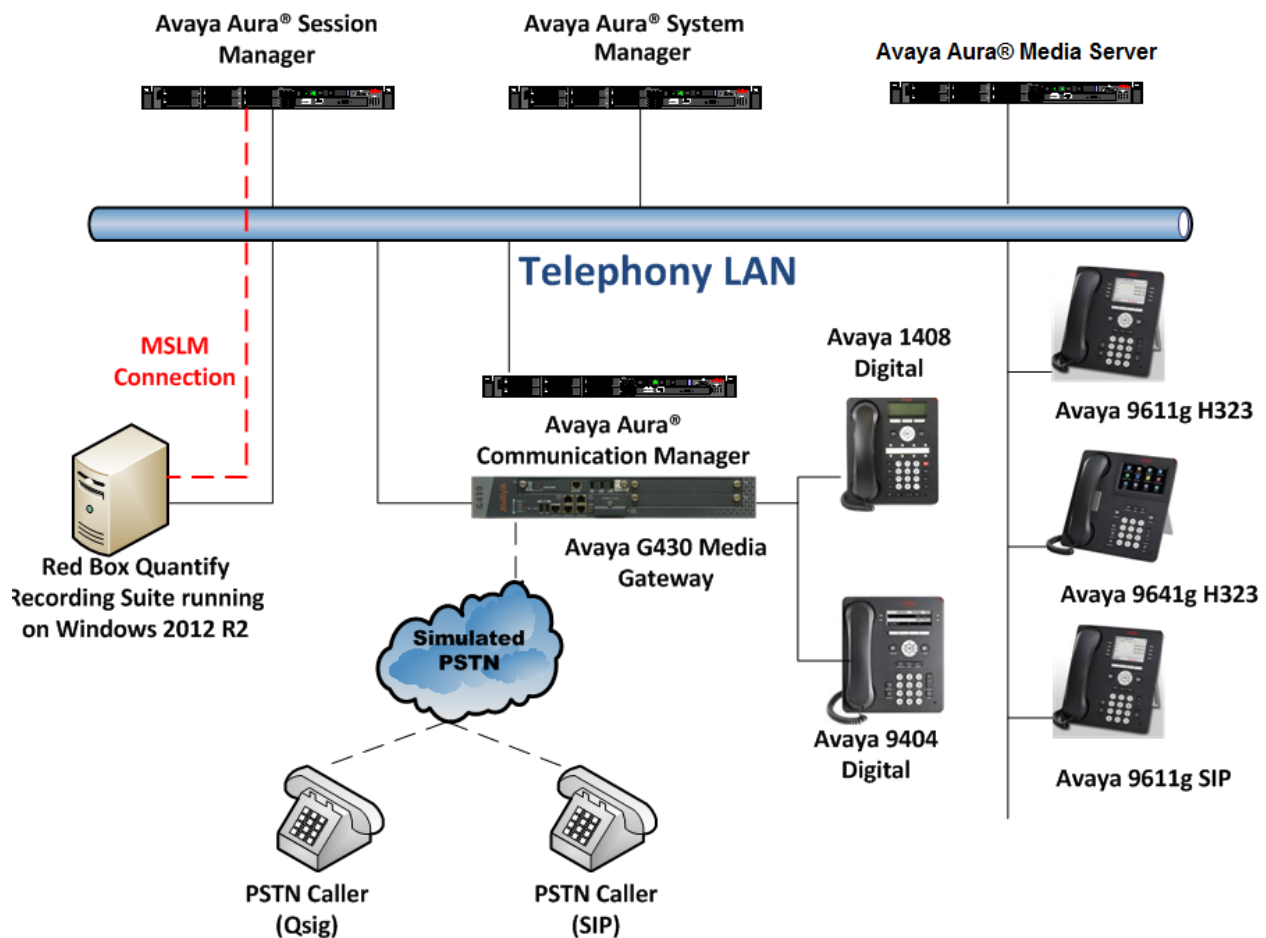

**Figure 1: Avaya Aura® Communication Manager with Avaya Aura® Application Enablement Services Server and Red Box Recorders Quantify 4B SP2 Configuration**

## 4. Equipment and Software Validated

The following equipment and software were used for the sample configuration as shown in **Figure 1**.

| Equipment                                                   | Software                                                                                                                                                                                                                                                                                                                         |
|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Avaya Aura® Communication Manager<br>VMware Virtual machine | R7.1.2<br>CM 7.1.2.0.0.532.24184<br>KERNEL-3.10.0-693.e17.AV1<br>PLAT-rhe17.2-0010                                                                                                                                                                                                                                               |
| Avaya G430 Media Gateway                                    | 38.21.0/1                                                                                                                                                                                                                                                                                                                        |
| Avaya Aura® Application Enablement Services                 | R7.1.2.0.0.3-0                                                                                                                                                                                                                                                                                                                   |
| Avaya Aura® Media Server                                    | v7.8.0.309                                                                                                                                                                                                                                                                                                                       |
| Avaya Aura® System Manager                                  | R7.1.2.0<br>Build- 7.1.0.0.1125193<br>Update Revision – 7.1.2.0.057353<br>Feature Pack 2                                                                                                                                                                                                                                         |
| Avaya Aura® Session Manager                                 | 7.1.2.0.712004                                                                                                                                                                                                                                                                                                                   |
| Avaya 9611g IP Telephone H323                               | 6.6604                                                                                                                                                                                                                                                                                                                           |
| Avaya 9611g IP Telephone SIP                                | 7.1.0.1.1                                                                                                                                                                                                                                                                                                                        |
| Avaya 9641g IP Telephone SIP                                | 7.1.0.1.1                                                                                                                                                                                                                                                                                                                        |
| Avaya 9404 Digital Telephone                                |                                                                                                                                                                                                                                                                                                                                  |
| Red Box Recorders – Quantify<br>4B_SP2_Build_170            | Quantify 4.6.170<br>Recorder 4.6.7.170<br>Active Recording PP 4.6.3.170<br>CTI Only PP 4.6.4.170<br>RTP_RAM 4.6.4.170<br>Avaya Active CTI 4.6.7.170<br>SNMP Agent Service 4.6.0.170<br>Named Pipe Proxy 4.6.0.170<br>RA Interface 4.6.2.170<br>BUI 4.6.0.170<br>Upload Manager 1.0<br>Update Manager 5.42<br>Support Manager 2.3 |

## 5. Configure Avaya Aura® Communication Manager

The configuration and verification operations illustrated in this section were all performed using Communication Manager System Administration Terminal (SAT). The information provided in this section describes the configuration of Communication Manager for this solution. For all other provisioning information such as initial installation and configuration, please refer to the product documentation as referenced in **Section 10**. The configuration operations described in this section can be summarized as follows:

- Verify System Parameters Customer Options
- Verify System Parameters Features
- Configure Service Observe
- Configure Target Stations to be Recorded
- Configure Station Button Assignments
- Configure the Interface to AES

### 5.1. Verify System Parameters Customer Options

Use the **display system-parameters customer-options** command to verify that Communication Manager has permissions for features illustrated in these Application Notes. On **Page 3**, ensure that **Computer Telephony Adjunct Links?** is set to **y** as shown below.

| display system-parameters customer-options                        |   | Page                                     | 3 of 11  |
|-------------------------------------------------------------------|---|------------------------------------------|----------|
| OPTIONAL FEATURES                                                 |   |                                          |          |
| Abbreviated Dialing Enhanced List?                                | y | Audible Message Waiting?                 | n        |
| Access Security Gateway (ASG)?                                    | n | Authorization Codes?                     | n        |
| Analog Trunk Incoming Call ID?                                    | n | CAS Branch?                              | n        |
| A/D Grp/Sys List Dialing Start at 01?                             | n | CAS Main?                                | n        |
| Answer Supervision by Call Classifier?                            | n | Change COR by FAC?                       | n        |
| ARS?                                                              | y | <b>Computer Telephony Adjunct Links?</b> | <b>y</b> |
| ARS/AAR Partitioning?                                             | y | Cvg Of Calls Redirected Off-net?         | y        |
| ARS/AAR Dialing without FAC?                                      | y | DCS (Basic)?                             | y        |
| ASAI Link Core Capabilities?                                      | y | DCS Call Coverage?                       | n        |
| ASAI Link Plus Capabilities?                                      | y | DCS with Rerouting?                      | n        |
| Async. Transfer Mode (ATM) PNC?                                   | n | Digital Loss Plan Modification?          | n        |
| Async. Transfer Mode (ATM) Trunking?                              | n | DS1 MSP?                                 | y        |
| ATM WAN Spare Processor?                                          | n | DS1 Echo Cancellation?                   | y        |
| ATMS?                                                             | n |                                          |          |
| Attendant Vectoring?                                              | y |                                          |          |
| (NOTE: You must logoff & login to effect the permission changes.) |   |                                          |          |

## 5.2. Verify System Parameters Features

On **Page 11** of the system-parameters features form, set **Allow Two Observers in Same Call?** to **y**.

|                                               |                      |
|-----------------------------------------------|----------------------|
| change system-parameters features             | <b>Page 11</b> of 18 |
| FEATURE-RELATED SYSTEM PARAMETERS             |                      |
| CALL CENTER SYSTEM PARAMETERS                 |                      |
| EAS                                           |                      |
| Expert Agent Selection (EAS) Enabled?         | y                    |
| Minimum Agent-LoginID Password Length:        |                      |
| Direct Agent Announcement Extension:          | Delay:               |
| Message Waiting Lamp Indicates Status For:    | station              |
| VECTORIZING                                   |                      |
| Converse First Data Delay:                    | 0                    |
| Converse Signaling Tone (msec):               | 100                  |
| Second Data Delay:                            | 2                    |
| Pause (msec):                                 | 70                   |
| Reverse Star/Pound Digit For Collect Step? n  |                      |
| Store VDN Name in Station's Local Call Log? n |                      |
| SERVICE OBSERVING                             |                      |
| Service Observing: Warning Tone?              | y                    |
| Service Observing Allowed with Exclusion?     | n                    |
| <b>Allow Two Observers in Same Call? y</b>    |                      |

### 5.3. Configure Service Observe

For the purposes of Multi Registration, service observe must be enabled for the COR to which the Target Stations will be assigned. Using the command **change cor 1** set both **Can Be Service Observed?** and **Can Be A Service Observer?** to **y**.

| change cor 1                        | Page 1 of 23                                |
|-------------------------------------|---------------------------------------------|
| CLASS OF RESTRICTION                |                                             |
| COR Number: 1                       |                                             |
| COR Description: Default            |                                             |
| FRL: 0                              | APLT? y                                     |
| <b>Can Be Service Observed? y</b>   | Calling Party Restriction: none             |
| <b>Can Be A Service Observer? y</b> | Called Party Restriction: none              |
| Time of Day Chart: 1                | Forced Entry of Account Codes? n            |
| Priority Queuing? n                 | Direct Agent Calling? y                     |
| Restriction Override: all           | Facility Access Trunk Test? n               |
| Restricted Call List? n             | Can Change Coverage? n                      |
| Access to MCT? y                    | Fully Restricted Service? n                 |
| Group II Category For MFC: 7        | Hear VDN of Origin Annc.? y                 |
| Send ANI for MFE? n                 | Add/Remove Agent Skills? n                  |
| MF ANI Prefix:                      | Automatic Charge Display? n                 |
| Hear System Music on Hold? y        | PASTE (Display PBX Data on Phone)? y        |
|                                     | Can Be Picked Up By Directed Call Pickup? y |
|                                     | Can Use Directed Call Pickup? y             |
|                                     | Group Controlled Restriction: inactive      |

On Page 2 set **Service Observing by Recording Device** to **y**.

| change cor 1                                    | Page 2 of 23                    |
|-------------------------------------------------|---------------------------------|
| CLASS OF RESTRICTION                            |                                 |
| MF Incoming Call Trace? n                       |                                 |
| Brasil Collect Call Blocking? n                 |                                 |
| Block Transfer Display? n                       |                                 |
| Block Enhanced Conference/Transfer Displays? y  |                                 |
| Remote Logout of Agent? n                       |                                 |
| Station Lock COR: 1                             | TODSL Release Interval (hours): |
| Station-Button Display of UUI IE Data? n        |                                 |
| <b>Service Observing by Recording Device? y</b> |                                 |
| Can Force a Work State Change? n                |                                 |
| Work State Change can be Forced? n              |                                 |
| Restrict Second Call Consult? n                 |                                 |



## 5.4. Configure Target Stations to be Recorded

Use the **add station** command to configure a station for each of the target stations to be recorded. Enter in a descriptive **Name** and **Security Code** for each one. The **Security Code** will be referenced by Quantify when setting up the recording extensions. Set the **IP Softphone?** to **y**.

|                             |                                              |             |
|-----------------------------|----------------------------------------------|-------------|
| <b>add station 8237001</b>  |                                              | Page 1 of 5 |
| STATION                     |                                              |             |
| Extension: 8237001          | Lock Messages? n                             | BCC: 0      |
| Type: 9404                  | <b>Security Code:1234</b>                    | TN: 1       |
| Port: S00040                | Coverage Path 1:                             | COR: 1      |
| <b>Name: Redbox,Digital</b> | Coverage Path 2:                             | COS: 1      |
|                             | Hunt-to Station:                             |             |
| STATION OPTIONS             |                                              |             |
| Loss Group: 2               | Time of Day Lock Table:                      |             |
| Data Option: none           | Personalized Ringing Pattern: 1              |             |
| Speakerphone: 2-way         | Message Lamp Ext: 4000                       |             |
| Display Language: english   | Mute Button Enabled? y                       |             |
|                             | Expansion Module? n                          |             |
| Survivable COR: internal    | Media Complex Ext:                           |             |
| Survivable Trunk Dest? y    | <b>IP SoftPhone? y</b>                       |             |
|                             | Remote Office Phone? n                       |             |
|                             | IP Video Softphone? n                        |             |
|                             | Short/Prefixed Registration Allowed: default |             |
|                             | Customizable Labels? y                       |             |

On **Page 2**, ensure that the **Multimedia Mode** is set to **enhanced**.

| add station 4000                                                 |                                        | Page 2 of 5 |
|------------------------------------------------------------------|----------------------------------------|-------------|
| STATION                                                          |                                        |             |
| FEATURE OPTIONS                                                  |                                        |             |
| LWC Reception: spe                                               | Auto Select Any Idle Appearance? n     |             |
| LWC Activation? y                                                | Coverage Msg Retrieval? y              |             |
| LWC Log External Calls? n                                        | Auto Answer:                           |             |
| none                                                             |                                        |             |
| CDR Privacy? n                                                   | Data Restriction? n                    |             |
| Redirect Notification? y                                         | Idle Appearance Preference? n          |             |
| Per Button Ring Control? n                                       | Bridged Idle Line Preference? n        |             |
| Bridged Call Alerting? n                                         | Restrict Last Appearance? y            |             |
| Active Station Ringing: single                                   |                                        |             |
|                                                                  | EMU Login Allowed? n                   |             |
| H.320 Conversion? n                                              | Per Station CPN - Send Calling Number? |             |
| Service Link Mode: as-needed                                     | EC500 State: enabled                   |             |
| <b>Multimedia Mode: enhanced</b>                                 | Audible Message Waiting? n             |             |
| MWI Served User Type:                                            | Display Client Redirection? n          |             |
| AUDIX Name:                                                      | Select Last Used Appearance? n         |             |
|                                                                  | Coverage After Forwarding? s           |             |
|                                                                  | Multimedia Early Answer? n             |             |
| Remote Softphone Emergency Calls: as-on-local Direct IP-IP Audio |                                        |             |
| Connections? y                                                   |                                        |             |
| Emergency Location Ext: 201                                      | Always Use? n IP Audio Hairpinning? n  |             |

## 5.5. Configure Station Button Assignments

Use the **change station** command to configure the button assignments of the stations to be recorded, as required. Add the appropriate button assignments as shown on **Page 4** below. In this case there are three call appearance buttons **call-appr**. There are also buttons assigned for the call functions call-pickup, bridged appearance and call park: **call-pkup**, **brdg-appr**, **call-park**.

|                            |                     |                    |
|----------------------------|---------------------|--------------------|
| <b>change station 4000</b> |                     | <b>Page 4 of 5</b> |
| STATION                    |                     |                    |
| SITE DATA                  |                     |                    |
| Room:                      |                     | Headset? n         |
| Jack:                      |                     | Speaker? n         |
| Cable:                     |                     | Mounting: d        |
| Floor:                     |                     | Cord Length: 0     |
| Building:                  |                     | Set Color:         |
| ABBREVIATED DIALING        |                     |                    |
| List1:                     | List2:              | List3:             |
|                            |                     |                    |
| BUTTON ASSIGNMENTS         |                     |                    |
| 1: call-appr               | 5: <b>brdg-appr</b> | <b>B:1 E:4001</b>  |
| 2: call-appr               | 6: <b>call-park</b> |                    |
| 3: call-appr               | 7:                  |                    |
| 4: <b>call-pkup</b>        | 8:                  |                    |
| voice-mail                 |                     |                    |

## 5.6. Configure Interface to Avaya Aura® Application Enablement Services

Enter the node **Name** and **IP Address** for the Application Enablement Server, in this case **devconaes61** and note the **procr IP Address**.

| change node-names ip |              | Page 1 of 2 |
|----------------------|--------------|-------------|
| IP NODE NAMES        |              |             |
| Name                 | IP Address   |             |
| procr                | 10.10.16.23  |             |
| Gateway              | 10.10.16.1   |             |
| IPbuffer             | 10.10.16.184 |             |
| Intuition            | 10.10.16.51  |             |
| MedPro               | 10.10.16.32  |             |
| Presence             | 10.10.16.83  |             |
| RDTT                 | 10.10.16.185 |             |
| SESMNGR              | 10.10.16.44  |             |
| SM1                  | 10.10.16.43  |             |
| SM61                 | 10.10.16.201 |             |
| default              | 0.0.0.0      |             |
| devconaes61          | 10.10.16.30  |             |

In order for Communication Manager to establish a connection to Application Enablement Services, administer the CTI Link as shown below. Specify an available **Extension** number, set the **Type** as **ADJ-IP**, which denotes that this is a link to an IP connected adjunct, and name the link for easy identification, in this instance, the node-name is used.

| add cti-link 1  |                   | Page 1 of 3 |
|-----------------|-------------------|-------------|
| CTI LINK        |                   |             |
| CTI Link: 1     |                   |             |
| Extension: 1111 |                   |             |
| Type: ADJ-IP    |                   |             |
|                 |                   | COR:        |
| 1               | Name: devconaes61 |             |

Configure IP-Services for the AESVCS service using **change ip-services** command. Using the C-LAN node name as noted above i.e. **procr**

| change ip-services |          |              |             |             | Page        | 1 of | 4 |
|--------------------|----------|--------------|-------------|-------------|-------------|------|---|
| IP SERVICES        |          |              |             |             |             |      |   |
| Service Type       | Enabled  | Local Node   | Local Port  | Remote Node | Remote Port |      |   |
| CDR1               |          | CLAN         | 0           | IPbuffer    | 9000        |      |   |
| CDR2               |          | CLAN         | 0           | RDTT        | 9001        |      |   |
| <b>AESVCS</b>      | <b>y</b> | <b>procr</b> | <b>8765</b> |             |             |      |   |

Navigate to **Page 4**, set the **AE Services Server** node-name and the **Password** the AES Server will use to authenticate with Communication Manager.

| change ip-services         |                    |                       |          |        |  | Page | 4 of | 4 |
|----------------------------|--------------------|-----------------------|----------|--------|--|------|------|---|
| AE Services Administration |                    |                       |          |        |  |      |      |   |
| Server ID                  | AE Services Server | Password              | Enabled  | Status |  |      |      |   |
| 1:                         | <b>devconaes61</b> | <b>Avayapassword1</b> | <b>y</b> | in use |  |      |      |   |

## 6. Configuration of Avaya Aura® Application Enablement Services

This section provides the procedures for configuring Application Enablement Services (AES). The procedures fall into the following areas:

- Verify Licensing
- Create Switch Connection
- Create CTI User
- Enable CTI User
- Configure DMCC Port
- Enable Security Database

### 6.1. Verify Licensing

Access the Web License Manager of the Application Enablement Services Server. The **Web License Manager** screen below is displayed. Select **Licensed products** → **APPL\_ENAB** → **Application\_Enablement** in the left pane, to display the **Licensed Features** screen in the right pane. Verify that there are sufficient licenses for **Device Media and Call Control**, as shown below. If not, consult with your Avaya Account Manager or Business Partner to acquire the proper license for your solution.

Install License

Licensed Products

APPL\_ENAB

Application\_Enablement

Uninstall License

Change Password

Server Properties

Manage Users

Logout

You are here: Licensed products > Application Enablement (CTI)


View Peak Usage

Licensed Features

| Feature (Keyword)                                                 | Expiration Date | Licensed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Acquired    |
|-------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| CVLAN ASAI (VALUE_AES_CVLAN_ASAI)                                 | 2011/11/05      | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0           |
| Unified CC API Desktop Edition (VALUE_AES_AEC_UNIFIED_CC_DESKTOP) | 2011/11/05      | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0           |
| AES ADVANCED SMALL SWITCH (VALUE_AES_AEC_SMALL_ADVANCED)          | 2011/11/05      | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0           |
| CVLAN Proprietary Links (VALUE_AES_PROPRIETARY_LINKS)             | 2011/11/05      | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0           |
| Product Notes (VALUE_NOTES)                                       | 2011/11/05      | SmallServerTypes: s8300c;s8300d;icc;premio;tn8400;laptop;CtiSmallServer<br>MediumServerTypes: ibmx306;ibmx306m;dell1950;xen;hs20;hs20_8832_vm;CtiMediumServer<br>LargeServerTypes: isp2100;ibmx305;d1380g3;d1385g1;d1385g2;unknown;CtiLargeServer<br>TrustedApplications: IPS_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; 1XP_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; 1XM_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; PC_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; CIE_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; OSPC_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; VP_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; SAMETIME_001, VALUE_AES_UNIFIED_CC_DESKTOP,,, CCE_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; CSI_T1_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; CSI_T2_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; AVAYAVERINT_001, BasicUnrestricted, AdvancedUnrestricted, DMCUnrestricted; | Not counted |
| AES ADVANCED LARGE SWITCH (VALUE_AES_AEC_LARGE_ADVANCED)          | 2011/11/05      | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0           |
| TSAPI Simultaneous Users (VALUE_AES_TSAPI_USERS)                  | 2011/11/05      | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0           |
| DLG (VALUE_AES_DLG)                                               | 2011/11/05      | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0           |
| Device Media and Call Control (VALUE_AES_DMCC_DMC)                | 2011/11/05      | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0           |
| AES ADVANCED MEDIUM SWITCH (VALUE_AES_AEC_MEDIUM_ADVANCED)        | 2011/11/05      | 10                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 0           |


## 6.2. Create Switch Connection

Access the OAM web-based interface of the Application Enablement Services Server, using the URL [https://<Server\\_IP>](https://<Server_IP>). The Management console is displayed; log in using the appropriate credentials.

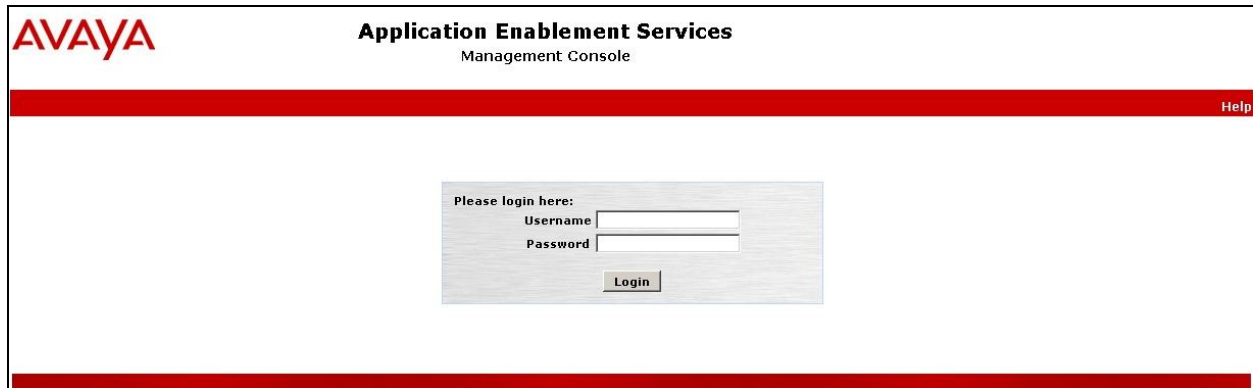

The screenshot shows the Avaya Application Enablement Services Management Console login page. At the top left is the Avaya logo. To its right, the text 'Application Enablement Services' is displayed in bold, with 'Management Console' underneath it. A red horizontal bar spans the width of the page, with the word 'Help' in the top right corner. In the center of the page is a login box with the text 'Please login here:'. Inside this box are two input fields: 'Username' and 'Password'. Below these fields is a 'Login' button.

The **Welcome to OAM** screen is displayed next.

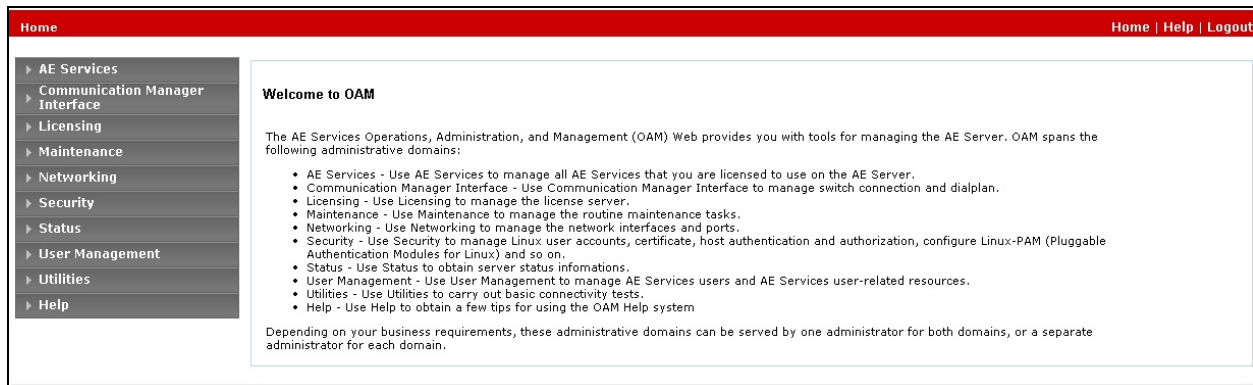

The screenshot shows the 'Welcome to OAM' screen. At the top, a red horizontal bar contains the word 'Home' on the left and 'Home | Help | Logout' on the right. On the left side, there is a vertical navigation menu with the following items: 'AE Services', 'Communication Manager Interface', 'Licensing', 'Maintenance', 'Networking', 'Security', 'Status', 'User Management', 'Utilities', and 'Help'. The main content area on the right is titled 'Welcome to OAM'. It contains a paragraph: 'The AE Services Operations, Administration, and Management (OAM) Web provides you with tools for managing the AE Server. OAM spans the following administrative domains:'. This is followed by a bulleted list of administrative domains and their functions: 'AE Services - Use AE Services to manage all AE Services that you are licensed to use on the AE Server.', 'Communication Manager Interface - Use Communication Manager Interface to manage switch connection and dialplan.', 'Licensing - Use Licensing to manage the license server.', 'Maintenance - Use Maintenance to manage the routine maintenance tasks.', 'Networking - Use Networking to manage the network interfaces and ports.', 'Security - Use Security to manage Linux user accounts, certificate, host authentication and authorization, configure Linux-PAM (Pluggable Authentication Modules for Linux) and so on.', 'Status - Use Status to obtain server status informations.', 'User Management - Use User Management to manage AE Services users and AE Services user-related resources.', 'Utilities - Use Utilities to carry out basic connectivity tests.', and 'Help - Use Help to obtain a few tips for using the OAM Help system'. At the bottom of the main content area, a paragraph states: 'Depending on your business requirements, these administrative domains can be served by one administrator for both domains, or a separate administrator for each domain.'

To establish the connection between Communication Manager and the Application Enablement Services Server, click **Communication Manager Interface** → **Switch Connections**. In the field next to next to **Add Connection**, enter **CM** and click on **Add Connection**, the following screen will be displayed.

The screenshot shows the 'Communication Manager Interface | Switch Connections' page. On the left is a navigation menu with options: AE Services, Communication Manager Interface (selected), Switch Connections (selected), Dial Plan, Licensing, Maintenance, Networking, Security, Status, User Management, Utilities, and Help. The main content area is titled 'Connection Details - CM' and contains the following fields:

- Switch Password: [Text Input]
- Confirm Switch Password: [Text Input]
- Msg Period: [30] Minutes (1 - 72)
- SSL: ☒
- Processor Ethernet: ☐

At the bottom of the form are 'Apply' and 'Cancel' buttons.

Complete the configuration as shown and enter the password specified in **Section 5.6** when configuring AESVCS in ip-services. In this instance **Avayapassword1**. Click on **Apply**, the screen below will be displayed.

The screenshot shows the 'Communication Manager Interface | Switch Connections' page after clicking 'Apply'. The main content area is titled 'Switch Connections' and contains a table with the following data:

| Connection Name | Processor Ethernet | Msg Period | Number of Active Connections |
|-----------------|--------------------|------------|------------------------------|
| CM              | No                 | 30         | 1                            |

Below the table are several buttons: 'Edit Connection', 'Edit PE/CLAN IPs', 'Edit H.323 Gatekeeper', 'Delete Connection', and 'Survivability Hierarchy'. There is also an 'Add Connection' button at the top right of the table area.



Click on **Edit PE/CLAN IPs** (at the bottom of the last screenshot) in order to specify the IP address of the Communication Manager, as noted in **Section 5.6**. Next to **Add Name or IP**, enter the IP address of the Communication Manager and click on **Add Name or IP**.

Communication Manager Interface | Switch Connections Home | Help | Logout

- ▶ AE Services
- ▼ Communication Manager Interface
  - Switch Connections
  - ▶ Dial Plan
  - ▶ Licensing
  - ▶ Maintenance
  - ▶ Networking
  - ▶ Security
  - ▶ Status
  - ▶ User Management
  - ▶ Utilities
  - ▶ Help

**Edit CLAN IPs - CM**

| Name or IP Address | Status |
|--------------------|--------|
| 10.10.16.23        | In Use |

Click on **Back** and then click on **Edit H.323 Gatekeeper**. Enter the IP address of the Communication Manager and click on **Add Name or IP**

Communication Manager Interface | Switch Connections Home | Help | Logout

- ▶ AE Services
- ▼ Communication Manager Interface
  - Switch Connections
  - ▶ Dial Plan
  - ▶ Licensing
  - ▶ Maintenance
  - ▶ Networking
  - ▶ Security
  - ▶ Status
  - ▶ User Management
  - ▶ Utilities
  - ▶ Help

**Edit H.323 Gatekeeper - CM**

| Name or IP Address | Status |
|--------------------|--------|
| 10.10.16.23        | In Use |

Select **AE Services** from the left hand menu and select **DMCC** to verify that the **DMCC Service** is licensed by ensuring that **DMCC Service** is in the list of services and that the **License Mode** is showing **NORMAL MODE**. If not, consult with your Avaya Account Manager or Business Partner to acquire the proper license for your solution.

AE Services

Home | Help | Logout

AE Services

CVLAN

DLG

DMCC

SMS

TSAPI

TWS

Communication Manager Interface

Licensing

Maintenance

Networking

Security

Status

User Management

Utilities

Help

AE Services

IMPORTANT: AE Services must be restarted for administrative changes to fully take effect. Changes to the Security Database do not require a restart.

| Service                 | Status  | State   | License Mode | Cause* |
|-------------------------|---------|---------|--------------|--------|
| ASAI Link Manager       | N/A     | Running | N/A          | N/A    |
| CVLAN Service           | OFFLINE | Running | N/A          | N/A    |
| DLG Service             | OFFLINE | Running | N/A          | N/A    |
| DMCC Service            | ONLINE  | Running | NORMAL MODE  | N/A    |
| TSAPI Service           | ONLINE  | Running | NORMAL MODE  | N/A    |
| Transport Layer Service | N/A     | Running | N/A          | N/A    |

For status on actual services, please use [Status and Control](#)

\* -- For more detail, please mouse over the Cause, you'll see the tooltip, or go to help page.

License Information

You are licensed to run Application Enablement (CTI) version 6.0

## 6.3. Create CTI User

A user ID and password needs to be configured for the Red Box recorder to communicate as a DMCC Client with the Application Enablement Services. Select **User Management** → **User Admin** → **Add User** from the left hand menu, to display the **Add User** screen in the right pane. Enter desired values for **User Id**, **Common Name**, **Surname**, **User Password** and **Confirm Password**. For **Avaya Role**, select **userservice.useradmin** from the drop down list. For **CT User**, select **Yes** from the drop-down list. Retain the default value in the remaining fields. Click **Apply** at the bottom of the screen (not shown below).

User Management | User Admin | Add User

Home | Help | Logout

AE Services

Communication Manager Interface

Licensing

Maintenance

Networking

Security

Status

User Management

Service Admin

User Admin

Add User

Change User Password

List All Users

Modify Default Users

Search Users

Utilities

Help

Add User

Fields marked with \* can not be empty.

\* User Id

reboxAES

\* Common Name

reboxAES

\* Surname

reboxAES

\* User Password

\*\*\*\*\*

\* Confirm Password

\*\*\*\*\*

Admin Note

Avaya Role

userservice.useradmin

Business Category

Car License

CM Home

Css Home

CT User

Yes

Department Number

SJW; Reviewed:  
SPOC 4/9/2018

Solution & Interoperability Test Lab Application Notes  
©2018 Avaya Inc. All Rights Reserved.

18 of 32  
RBRMR\_AES71

## 6.4. Enable CTI User

Navigate to the users screen by selecting **Security** → **Security Database** → **CTI Users** → **List All Users**. In the **CTI Users** window, select the user that was set up in **Section 6.3** and select the **Edit** option.

The screenshot shows the 'CTI Users' window in a web application. The left sidebar contains a navigation menu with categories like AE Services, Communication Manager Interface, Licensing, Maintenance, Networking, Security, Security Database, Status, User Management, Utilities, and Help. The 'Security Database' section is expanded, showing 'CTI Users' as a sub-item. The main area displays a table of CTI Users with columns: User ID, Common Name, Worktop Name, and Device ID. The 'redboxAES' user is selected, highlighted with a red border. Below the table are 'Edit' and 'List All' buttons.

| User ID                                    | Common Name | Worktop Name | Device ID |
|--------------------------------------------|-------------|--------------|-----------|
| <input type="radio"/> John                 | John        | NONE         | NONE      |
| <input type="radio"/> pc5                  | pc5         | NONE         | NONE      |
| <input type="radio"/> pc5hd                | pc5hd       | NONE         | NONE      |
| <input type="radio"/> presence             | presence    | NONE         | NONE      |
| <input checked="" type="radio"/> redboxAES | redboxAES   | NONE         | NONE      |
| <input type="radio"/> scantalk             | Scantalk    | NONE         | NONE      |
| <input type="radio"/> synAES               | synAES      | NONE         | NONE      |

**Edit** **List All**

The **Edit CTI User** screen appears. Tick the **Unrestricted Access** box and **Apply Changes** at the bottom of the screen.

The screenshot displays the 'Edit CTI User' interface. On the left is a navigation menu with categories like 'AE Services', 'Security', and 'Security Database'. The 'Security Database' section is expanded, showing 'CTI Users' and 'List All Users'. The main content area is titled 'Edit CTI User' and contains the following fields and controls:

| User Profile:       |                                     |
|---------------------|-------------------------------------|
| User ID             | redboxAES                           |
| Common Name         | redboxAES                           |
| Worktop Name        | NONE                                |
| Unrestricted Access | <input checked="" type="checkbox"/> |

| Call and Device Control:                       |      |
|------------------------------------------------|------|
| Call Origination/Termination and Device Status | NONE |

| Call and Device Monitoring:  |                          |
|------------------------------|--------------------------|
| Device Monitoring            | NONE                     |
| Calls On A Device Monitoring | NONE                     |
| Call Monitoring              | <input type="checkbox"/> |

| Routing Control:                |      |
|---------------------------------|------|
| Allow Routing on Listed Devices | NONE |

At the bottom of the form are two buttons: 'Apply Changes' and 'Cancel Changes'.

## 6.5. Configure DMCC Port

On the AES Management Console navigate to **Networking** → **Ports** to set the DMCC server port. During the compliance test, the **Unencrypted Port** set to **4721** was **Enabled** as shown in the screen below. Click the **Apply Changes** button (not shown) at the bottom of the screen to complete the process.

Networking | Ports

Home | Help | Logout

AE Services

Communication Manager

Interface

Licensing

Maintenance

Networking

AE Service IP (Local IP)

Network Configure

Ports

TCP Settings

Security

Status

User Management

Utilities

Help

Ports

CVLAN Ports

Unencrypted TCP Port

9999

Enabled Disabled

Encrypted TCP Port

9998

DLG Port

TCP Port

5678

TSAPI Ports

TSAPI Service Port

450

Enabled Disabled

Local TLINK Ports

TCP Port Min

1024

TCP Port Max

1039

Unencrypted TLINK Ports

TCP Port Min

1050

TCP Port Max

1065

Encrypted TLINK Ports

TCP Port Min

1066

TCP Port Max

1081

DMCC Server Ports

Unencrypted Port

4721

Enabled Disabled

Encrypted Port

4722

TR/87 Port

4723

H.323 Ports

TCP Port Min

20000

TCP Port Max

23999

Local UDP Port Min

30000

Local UDP Port Max

33999

Server Media

Enabled Disabled

RTP Local UDP Port Min\*

40000


RTP Local UDP Port Max\*

47999

\* Note: The number of RTP ports needs to be double the number of extensions using server media.

## 6.6. Enable Security Database

Select **Security** → **Security Database** → **Control** from the left pane, to display the **SDB Control for DMCC and TSAPI** screen in the right pane. Check **Enable SDB for DMCC Service** and **Enable SDB TSAPI Service, JTAPI and Telephony Service**, and click **Apply Changes**.

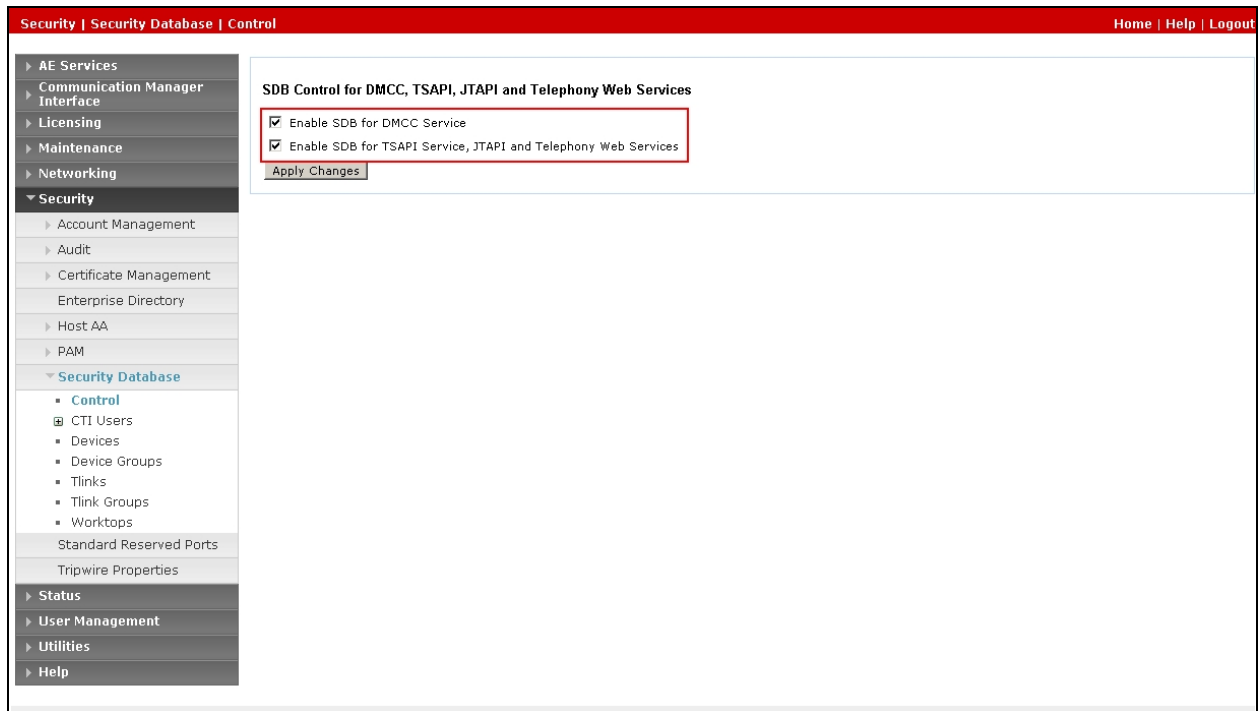

## 7. Configuration of Quantify

The Quantify server is provided pre-installed with Quantify 4B Service Pack 2. Administering an IP address on Microsoft Windows is outside of the scope of this document. There are two main components to configure the recording solution as follows.

- Register extensions to Quantify
- Configure Quantify to connect to Application Enablement Services

### 7.1. Register Extensions to Red Box Recorder

Run the **CTI Reg Tool**, located in **C:\LTR\utils** on the Red Box Recorder Server, the **CTI Reg Tool** is used to access the Red Box Recorder server and assign extensions which are to be recorded. Accept the default **Recorder IP Address**, **Recorder Username** and **Recorder Password** and click **Connect**. Select the radio button, **Avaya Multiple Registration** and enter the extension numbers to be recorded in the **Extension or Range to register** field. Click **Register** and the devices are registered with the recorder. Select **Disconnect** button when complete and close down the **CTI Registration Tool** dialog box

CTI Registration Tool

Recorder IP Address -  
127 . 0 . 0 . 1

Recorder Username  
admin

Recorder Password  
\*\*\*\*\*

Connect

Extension or range to register  
(e.g. 1234 or 1234-1250)

☒ Avaya Multiple Registration  
☐ Avaya Single Step Conferencing  
☐ Avaya TSAPI Trunk  
☐ Aastra Active  
☐ Avaya Active Recording Tone

Switch Identifier  
(S1)

Register

Status  
Waiting to connect

The web interface is used to configure the extensions. Use **http://<server IP>** to access the **Recording** screen of the Red Box Recorder. The extensions which were added earlier in this section should appear in the **Recording** screen as shown below.

**RED BOX RECORDERS**

Options | Logout

Management Status Setup Events Maintenance All

Enter search filter: Clear

**Recording:**

Show Only:

Search: e.g. 5201

Recording: Enabled Disabled All

| Device Text: ▲                     | Channel Name: | Recording Enabled:       |
|------------------------------------|---------------|--------------------------|
| <input type="checkbox"/> * 8230001 | 8230001       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230090 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230091 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230092 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230093 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230094 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230095 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230096 | 8230096       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230097 | 8230097       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230098 | 8230098       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8230099 | 8230099       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8235002 | 8235002       | <input type="checkbox"/> |
| <input type="checkbox"/> * 8235004 |               | <input type="checkbox"/> |
| <input type="checkbox"/> * 8237001 | 8237001       | <input type="checkbox"/> |

20 devices enabled for recording.

Update Delete Reset



Tick the checkbox under column **Recording Enabled** to configure these extensions for recording. Select **Update** and the extensions will be enabled for recording



Options ▾ | Logout

Management Status Setup Events Maintenance All
 Clear

### Recording:

Show Only:

Search: 
Recording: Enabled Disabled All

| <input type="checkbox"/> | Device Text: ▲ | Channel Name: | Recording Enabled:                  |
|--------------------------|----------------|---------------|-------------------------------------|
| <input type="checkbox"/> | 8230001        | 8230001       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230090        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230091        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230092        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230093        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230094        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230095        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230096        | 8230096       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230097        | 8230097       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230098        | 8230098       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8230099        | 8230099       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8235002        | 8235002       | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8235004        |               | <input checked="" type="checkbox"/> |
| <input type="checkbox"/> | 8237001        | 8237001       | <input checked="" type="checkbox"/> |

34 devices enabled for recording.

✓ Update
🗑 Delete
✗ Reset

## 7.2. Configure Red Box Recorder to connect to the Avaya Aura® Application Enablement Services

Use the config file **CTIServer\_AvayaActive.config** placed in default location of **C:\LTR\Config** to configure AES to Red Box Recorder solution. Open the file in text editor and enter in the following values. See below sample config file.

- **aesAddress:** Set this to **10.10.16.78** which is the AES IP Address
- **username:** Set this to the CTI user name that was set in **Section 6.3**
- **password:** Set this to the CTI user password set in **Section 6.3**
- **switchName:** This is the name of the switch connection as set in **Section 6.2**
- **audioDestinationAddress:** Enter in the IP address that was assigned to the Red Box Recorder
- **add device:** For Single recorded devices
- **add start/end:** For a range of recorded devices

```
<avaya>
<dmcc
  aesAddress="10.10.16.78"
  username="redbox"
  password="redbox123" />


<device
  switchName="CMLatest"
  audioDestinationAddress="10.10.16.95"
  multiRegistrationModelIndependent="true" />

  <!-- ACD monitoring for agent in/out info-->
  <!--To add a single recording device -->
  <add device="8230001"/>
  <!--To add a range of recording devices-->
  <add start="8235001" end="8235004"/>

</avaya>
```

Save the file.

Restart the recorder from the web interface, click on **Configuration → Recorder (Maintenance) icon**. Select the **Restart** radio button and click **Stop Recorder** as shown below. The Red Box Recorder will restart and is now configured to the Application Enablement Services.

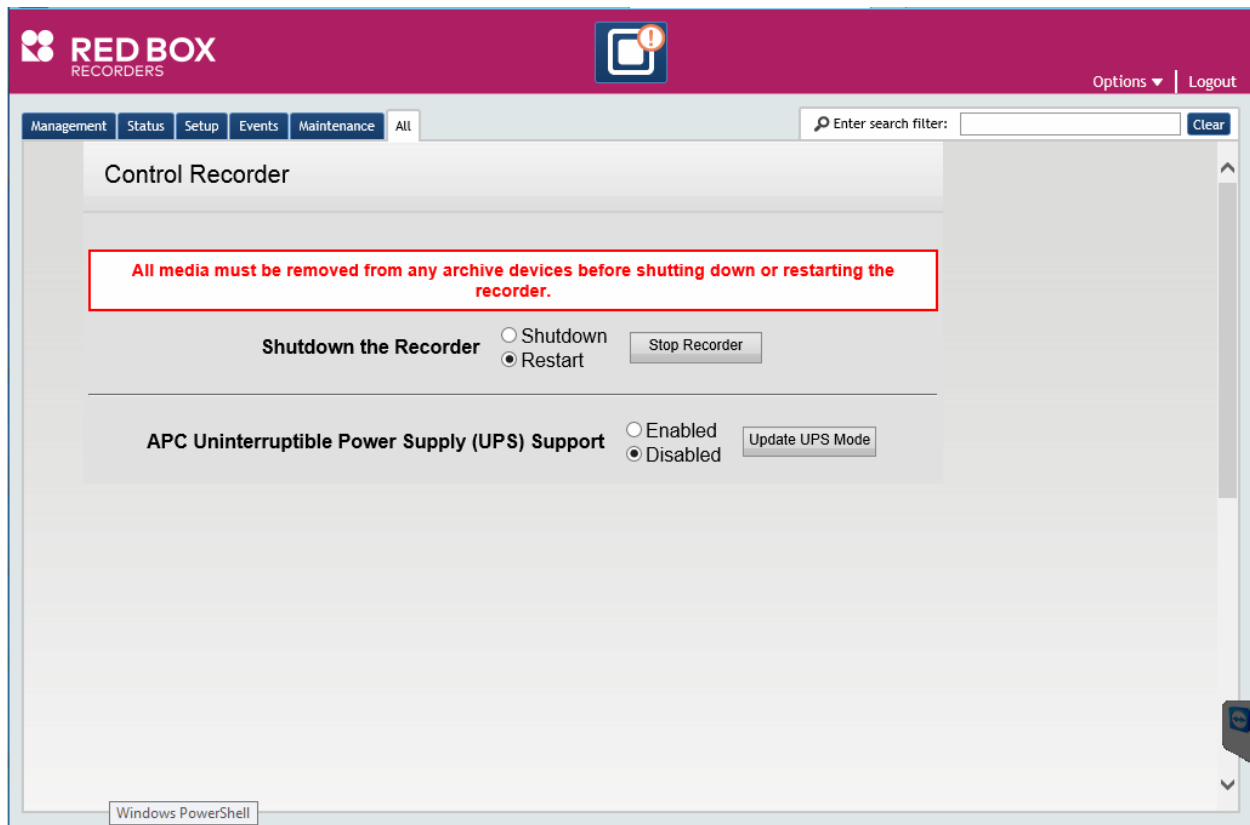

## 8. Verification Steps

This section provides the tests that can be performed to verify correct configuration of Avaya and Red Box Recorder solution.

### 8.1. Verify Avaya Aura® Communication Manager CTI Service State

The following steps can ensure that the communication between Communication Manager and the Application Enablement Services server is functioning correctly. Check the AESVCS link status with Application Enablement Services by using the command **status aesvcs cti-link**. The CTI Link is 1. Verify the **Service State** of the CTI link is **established**.

| status aesvcs cti-link      |         |          |                    |               |           |           |
|-----------------------------|---------|----------|--------------------|---------------|-----------|-----------|
| AE SERVICES CTI LINK STATUS |         |          |                    |               |           |           |
| CTI Link                    | Version | Mnt Busy | AE Services Server | Service State | Msgs Sent | Msgs Rcvd |
| 1                           | 4       | no       | devconaes61        | established   | 18        | 18        |

## 8.2. Verify Avaya Aura® Application Enablement Services DMCC Service

The following steps are carried out on the Application Enablement Services to ensure that the communication link between Communication Manager and the Application Enablement Services server is functioning correctly. Verify the status of the DMCC service by selecting **Status → Status and Control → DMCC Service Summary**. The **DMCC Service Summary – Session Summary** screen is displayed as shown below. The **Application** is set to **Redbox** and the **Far-end Identifier** is given as the IP address as expected.

**AVAYA**

**Application Enablement Services**  
Management Console

Welcome: User craft  
Last login: Tue Jun 7 13:23:55 2011 from 10.10.16.62  
HostName/IP: devconaes61/10.10.16.30  
Server Offer Type: TURNKEY  
SW Version: r6-1-0-20-0

Status | Status and Control | DMCC Service SummaryHome | Help | Logout

AE Services

Communication Manager Interface

Licensing

Maintenance

Networking

Security

Status

Alarm Viewer

Logs

Status and Control

CVLAN Service Summary

DLG Services Summary

DMCC Service Summary

Switch Conn Summary

TSAPI Service Summary

User Management

Utilities

Help

DMCC Service Summary - Session Summary

☐ Enable page refresh every 60 seconds

Session Summary [Device Summary](#)  
Generated on Tue Jun 07 16:25:39 GMT-00:00 2011  
Service Uptime: 19 days, 4 hours 41 minutes  
Number of Active Sessions: 1  
Number of Sessions Created Since Service Boot: 13  
Number of Existing Devices: 2  
Number of Devices Created Since Service Boot: 126

|                          | Session ID                           | User      | Application | Far-end Identifier | Connection Type | # of Associated Devices |
|--------------------------|--------------------------------------|-----------|-------------|--------------------|-----------------|-------------------------|
| <input type="checkbox"/> | 9595BE8826FCC46F2 6CA3D16DC0749F5-12 | redboxAES | Redbox      | 10.10.16.100       | XML Unencrypted | 2                       |

[Terminate Sessions](#) [Show Terminated Sessions](#)

Item 1-1 of 1

Copyright © 2009-2010 Avaya Inc. All Rights Reserved.

### 8.3. Verify Quantify Configuration

The following steps can be performed to verify the basic operation of the system components. Click on **Configuration → Recorder Status (Status) icon**. The Recorder Status page of the Quantify Recorder will show any alarms running. Note **Calls Being Recorded** will show number of calls currently being recorded. This page loads once logged into the recorder. See below screenshot.


The screenshot displays the 'Recorder Status' page of the RED BOX RECORDERS interface. The page has a purple header with the logo and a navigation bar with tabs: Management, Status, Setup, Events, Maintenance, and All. A search filter is present in the top right. The main content area features a table with the following data:

| Item                  | Status                     |
|-----------------------|----------------------------|
| Recorder ID           | 1234                       |
| Recorder Status       | Recording                  |
| System Type           | Standalone                 |
| Active Alarms         | 4                          |
| Unarchived Data       | <div><div></div></div> 0 % |
| Recorder Utilization  | <div><div></div></div> 0 % |
| Calls Being Recorded  | 0                          |
| Calls Being Discarded | 0                          |

Below the table, it states: 'No Archive Devices are licensed.'

The current recorder time is:  
12:29:25, 22 Feb 2018

Choose the **Version Information** icon on the recorder screen to check the version numbers of the recorder to ensure that the version is as expected.

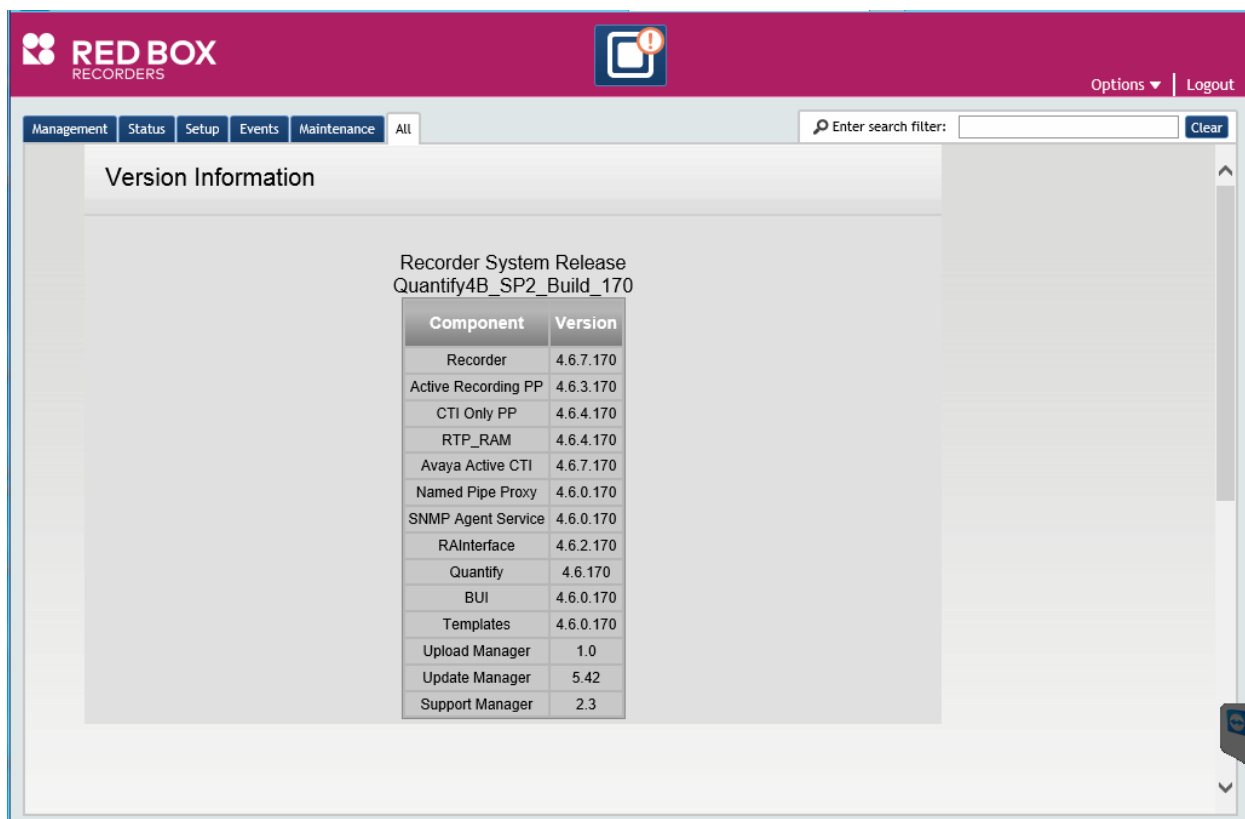

The screenshot shows the Red Box Recorders web interface. The top navigation bar includes the Red Box Recorders logo, a status icon, and links for Options and Logout. Below the navigation bar, there are tabs for Management, Status, Setup, Events, Maintenance, and All. A search filter input is also present. The main content area is titled "Version Information" and displays the Recorder System Release "Quantify4B\_SP2\_Build\_170". Below this, a table lists the components and their versions.

| Component           | Version   |
|---------------------|-----------|
| Recorder            | 4.6.7.170 |
| Active Recording PP | 4.6.3.170 |
| CTI Only PP         | 4.6.4.170 |
| RTP_RAM             | 4.6.4.170 |
| Avaya Active CTI    | 4.6.7.170 |
| Named Pipe Proxy    | 4.6.0.170 |
| SNMP Agent Service  | 4.6.0.170 |
| RAInterface         | 4.6.2.170 |
| Quantify            | 4.6.170   |
| BUI                 | 4.6.0.170 |
| Templates           | 4.6.0.170 |
| Upload Manager      | 1.0       |
| Update Manager      | 5.42      |
| Support Manager     | 2.3       |

## 9. Conclusion

These Application Notes describe the configuration steps required for the Red Box Recorder's Quantify to successfully interoperate with Avaya Aura® Communication Manager and Avaya Aura® Application Enablement Services. All functionality and serviceability test cases were completed successfully with observations shown in **Section 2.2**.

## 10. Additional References

Product documentation for Avaya products may be found at <http://support.avaya.com>

- [1] Avaya Aura® Application Enablement Services Administration and Maintenance Guide – Release 7.1.
- [2] Administering Avaya Aura® Communication Manager – Release 7.1

Product documentation for Red Box Recorder can be found at <http://www.redboxrecorders.com>

---

**©2018 Avaya Inc. All Rights Reserved.**

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at [devconnect@avaya.com](mailto:devconnect@avaya.com).