



Application Notes for Jabra BIZ 2300 Mono/Duo USB-A/USB-C Headset with Avaya Agent for Desktop - Issue 1.0

Abstract

These Application Notes describe the configuration steps required to integrate the Jabra BIZ 2300 Mono/Duo USB-A/USB-C Headset with Avaya Agent for Desktop. Call control is supported by the Jabra SDK which is inbuilt into Avaya Agent for Desktop.

Readers should pay attention to **Section 2**, in particular the scope of testing as outlined in **Section 2.1** as well as any observations noted in **Section 2.2**, to ensure that their own use cases are adequately covered by this scope and results.

Information in these Application Notes has been obtained through DevConnect compliance testing and additional technical discussions. Testing was conducted via the DevConnect Program at the Avaya Solution and Interoperability Test Lab.

1. Introduction

The Jabra BIZ 2300 Mono/Duo USB-A/USB-C Headset allows connection and call control with Avaya Agent for Desktop (hereafter referred to as Agent Desktop) using cable via the USB interface to the PC. Call control is supported by the Jabra SDK which is inbuilt into Avaya Agent for Desktop. In these compliance test, Jabra BIZ 2300 headset USB-A and USB-C connection are used.

With a Jabra headset connected to the PC USB interface, users can directly answer, end, mute/unmute, hold/resume and adjust volume using the in-line call controller of the headset with Agent Desktop running on the PC.

2. General Test Approach and Test Results

The interoperability compliance test included feature and serviceability testing. The feature testing focused on placing calls with Agent Desktop, answering and ending calls using the call control button on the Jabra headset, and verifying two-way audio. The call types included calls to voicemail, local extensions, and the PSTN. Call hold and resume, mute and un-mute, and volume are also tested.

The serviceability testing focused on verifying the usability of the headset solution after restarting the Agent Desktop, restarting the PC, and reconnecting the headset USB cable to the PC.

DevConnect Compliance Testing is conducted jointly by Avaya and DevConnect members. The jointly-defined test plan focuses on exercising APIs and/or standards-based interfaces pertinent to the interoperability of the tested products and their functionalities. DevConnect Compliance Testing is not intended to substitute full product performance or feature testing performed by DevConnect members, nor is it to be construed as an endorsement by Avaya of the suitability or completeness of a DevConnect member's solution

Avaya recommends our customers implement Avaya solutions using appropriate security and encryption capabilities enabled by our products. The testing referenced in these DevConnect Application Notes included the enablement of supported encryption capabilities in the Avaya products. Readers should consult the appropriate Avaya product documentation for further information regarding security and encryption capabilities supported by those Avaya products.

Support for these security and encryption capabilities in any non-Avaya solution component is the responsibility of each individual vendor. Readers should consult the appropriate vendor-supplied product documentation for more information regarding those products.

For the testing associated with these Application Notes, the interface between Avaya systems and endpoints utilized enabled capabilities of TLS/SRTP.

Avaya's formal testing and Declaration of Conformity is provided only on the headsets/handsets that carry the Avaya brand or logo. Avaya may conduct testing of non-Avaya headset/handset to determine interoperability with Avaya phones. However, Avaya does not conduct the testing of

non-Avaya headsets/handsets for: Acoustic Pressure, Safety, Hearing Aid Compliance, EMC regulations, or any other tests to ensure conformity with safety, audio quality, long-term reliability or any regulation requirements. As a result, Avaya makes no representations whether a particular non-Avaya headset will work with Avaya's telephones or with a different generation of the same Avaya telephone.

Since there is no industry standard for handset interfaces, different manufacturers utilize different handset/headset interfaces with their telephones. Therefore, any claim made by a headset vendor that its product is compatible with Avaya telephones does not equate to a guarantee that the headset will provide adequate safety protection or audio quality.

2.1. Interoperability Compliance Testing

All test cases were performed manually. The following features were verified:

- Placing calls to the voicemail system. Voice messages were recorded and played back to verify that the playback volume and recording level were good.
- Placing calls to internal extensions to verify two-way audio.
- Placing calls to the PSTN to verify two-way audio.
- Answering and ending calls using the call button on the in-line call controller of the headset and the soft button on Agent Desktop.
- Using the hold button on the in-line call controller of the headset and the soft button on Agent Desktop to hold and resume the audio.
- Using the volume buttons on the in-line call controller of the headset to adjust the audio volume.
- Using the mute button on the in-line call controller of the headset and the soft button on Agent Desktop to mute and un-mute the audio.
- Verifying incoming call notification on the in-line call controller of headset.
- Verifying call ended notification on the in-line call controller of headset.

The serviceability testing focused on verifying the usability of the headset solution after restarting the Agent Desktop, restarting the PC, and reconnecting the headset cable to the USB interface of the PC.

2.2. Test Results

All test cases are successfully completed. The following are the observations made:

- In *Advanced Audio Settings* for Agent Desktop, if *Headset Integration* is set to Advanced (SDK Native) the call button on Jabra BIZ 2300 headset can perform both Answer/Drop call function.

2.3. Support

For support on this Jabra headset solution, contact Jabra Technical Support at:

- Phone: +1-866-697-8757
- Website: <http://www.jabra.com/Support>
- Email: JabraSupport.US@jabra.com

3. Reference Configuration

Figure 1 illustrates the test configuration used to verify Jabra BIZ 2300 Mono/Duo USB-A/USB-C headset with Agent Desktop. The Avaya Agent for Desktop software was installed on the PCs. The Jabra headsets are connected via cable to the PCs' USB interface.

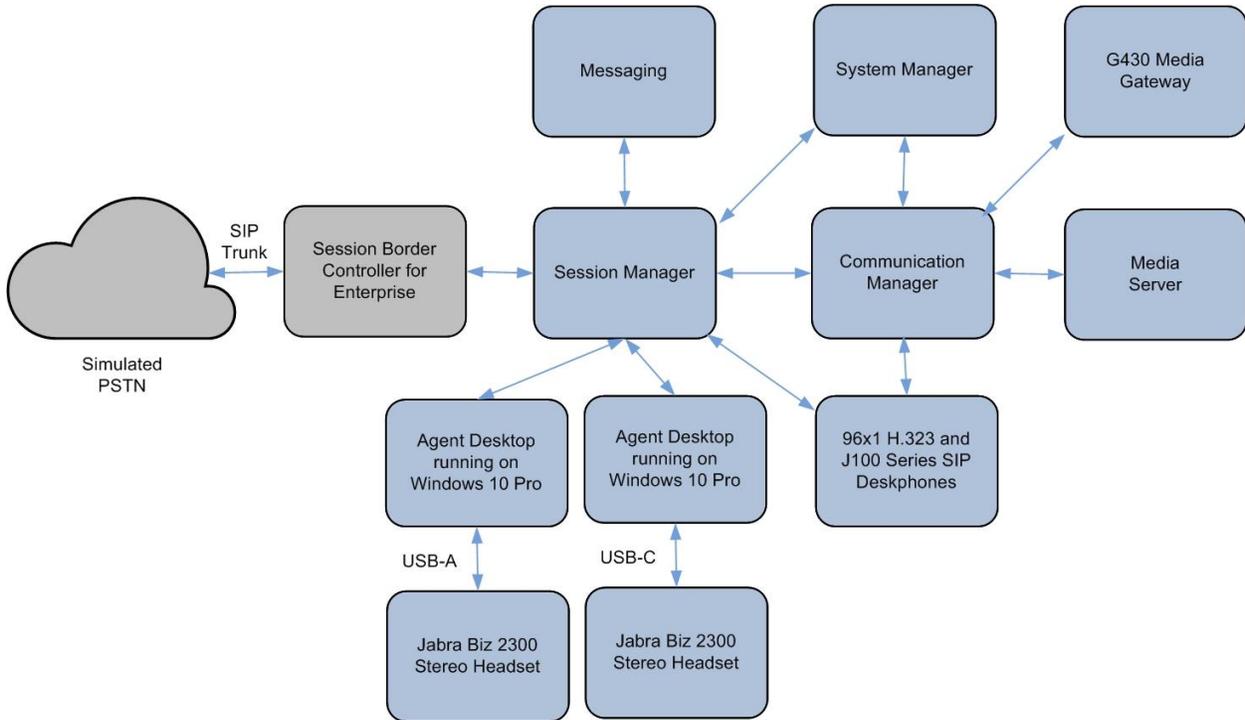


Figure 1: Test Configuration

4. Equipment and Software Validated

The following equipment and software were used for the sample configuration provided.

Equipment/Software	Release/Version
Avaya Aura® Communication Manager	8.1.3.0.1-FP3P1
Avaya G430 Media Gateway MGP	41.34.1
Avaya Aura® System Manager	8.1.3.1 Build No. - 8.1.0.0.733078
Avaya Aura® Session Manager	8.1.3.1.813113
Avaya Aura® Media Server	8.0.2.138
Avaya Messaging	10.8 SP1SU2
Avaya 96x1 Series H.323 Deskphones	6.8502
Avaya J100 Series SIP Deskphones	4.0.7.0.7
Avaya Agent for Desktop running on Windows 10 Pro	2.0.6.11.3003
Jabra BIZ 2300 Mono/Duo USB-A/USB-C Headsets	3.2.0

5. Configure Avaya Aura® Communication Manager

This section covers the station configuration for Agent Desktop on Communication Manager. The configuration is performed via the System Access Terminal (SAT) on Communication Manager.

Using an existing H.323 station, add the feature buttons shown in bold, which are used by Agent Desktop to log in as an Automatic Call Distribution (ACD) agent.

```
change station 10001                                     Page 4 of 5

                                STATION

SITE DATA
  Room:                               Headset? n
  Jack:                               Speaker? n
  Cable:                             Mounting: d
  Floor:                             Cord Length: 0
  Building:                           Set Color:

ABBREVIATED DIALING
  List1:                               List2:                               List3:

BUTTON ASSIGNMENTS
1:call-appr                               5:auto-in                               Grp:
2:call-appr                               6:manual-in                               Grp:
3:call-appr                               7:after-call                             Grp:
4:agnt-login                               8:aux-work                               RC:   Grp:
  voice-mail 10000
```

6. Configure Avaya Aura® Session Manager

This section covers the station configuration for Agent Desktop on Session Manager. The configuration is performed via the System Manager.

Using an existing SIP station, administer the feature buttons required. On the System Manager, navigate to **User Management > Manage users > New User Profile > Communication Profile > CM Endpoint Profile > Endpoint Editor**. At the bottom of the page, click the **Button Assignment** tab. Assign the **manual-in**, **auto-in**, **after-call**, **agnt-login** and **aux-work** button. Configuring these buttons is required to sign in the agent in Agent Desktop.

The screenshot displays the 'Endpoint Editor' configuration page in the Avaya Aura Session Manager. The interface includes a left-hand navigation menu with options like 'Manage Users', 'Public Contacts', and 'System Presence ACLs'. The main content area is titled 'Endpoint Editor' and contains several configuration sections:


- General Information:** Fields for 'emplate', 'ort', and 'lame' (containing 'AVAYA, SIP10053'). 'Set Type' is set to '9608SIPCC' and 'Security Code' is empty.
- Configuration Tabs:** 'General Options (G)', 'Feature Options (F)', 'Site Data (S)', 'Abbreviated Call Dialing (A)', 'Enhanced Call Fwd (E)', 'Button Assignment (B)', 'Profile Settings (P)', and 'Group Membership (M)'. The 'Button Assignment (B)' tab is active.
- Button Configuration Table:**

Endpoint Configurations		Button Configurations			
Favorite	Button Label	Button Feature	Argument-1	Argument-2	Argument-3
<input type="checkbox"/>		call-appr			
<input type="checkbox"/>		call-appr			
<input type="checkbox"/>		call-appr			
<input type="checkbox"/>		agnt-login			
<input checked="" type="checkbox"/>		auto-in			
<input checked="" type="checkbox"/>		manual-in			
<input checked="" type="checkbox"/>		after-call			
<input checked="" type="checkbox"/>		aux-work			
- Additional Fields:** 'Reason Code' and 'Hunt Grp' fields are visible at the bottom of the table.
- Required:** A section at the bottom left indicates which configurations are required.
- Done:** A button at the bottom right to save the configuration.


7. Configure Avaya Agent Desktop

Simply plug the Jabra BIZ 2300 cable into the USB port of the PC. The device drivers will automatically be installed. In these compliance settings, local configuration for Agent Desktop is used.

After logging into Agent Desktop, select **Settings** as shown below.

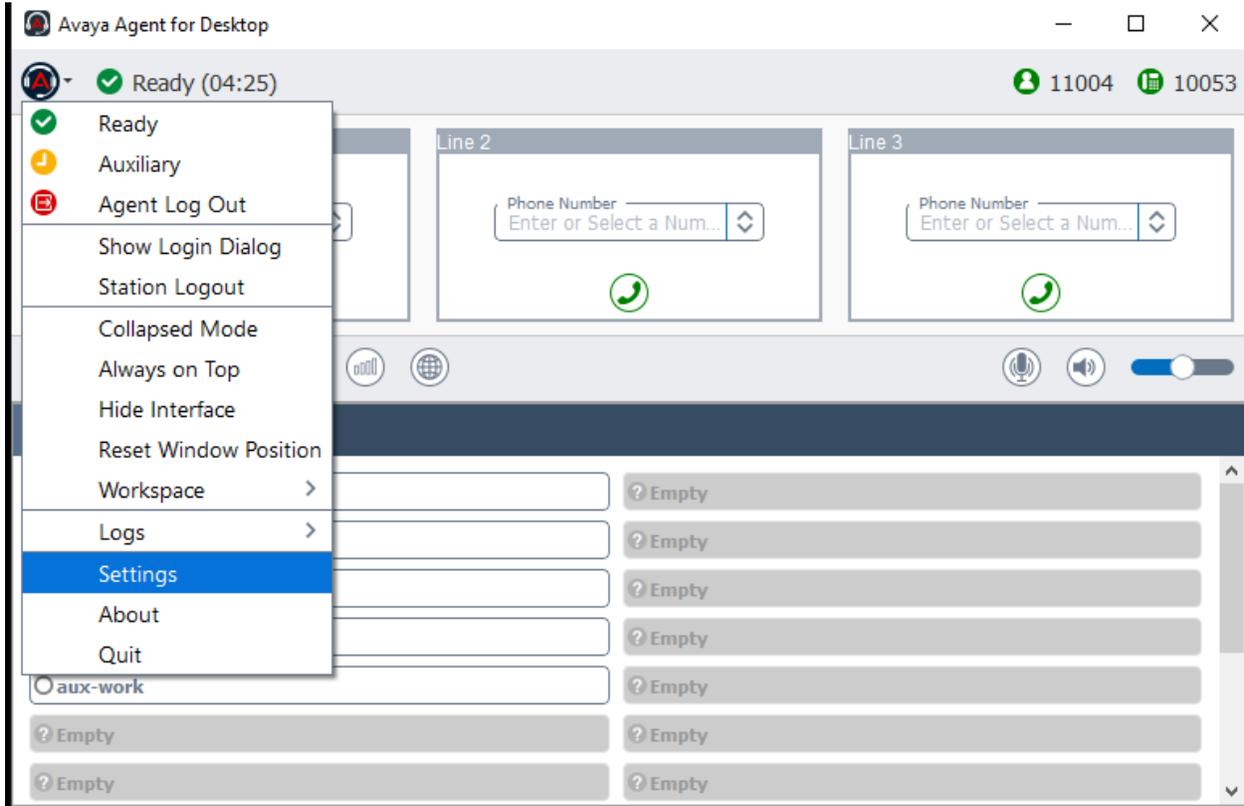

In the **Avaya Agent Settings** window, click on **Audio** and check that the **Device** under **Audio Output** and **Audio Input** display *Jabra BIZ 2300*. Otherwise, select the device from the click down menu on the respective box. The **Ringer Output Device** selection of *Jabra BIZ 2300* as **Device** is optional.

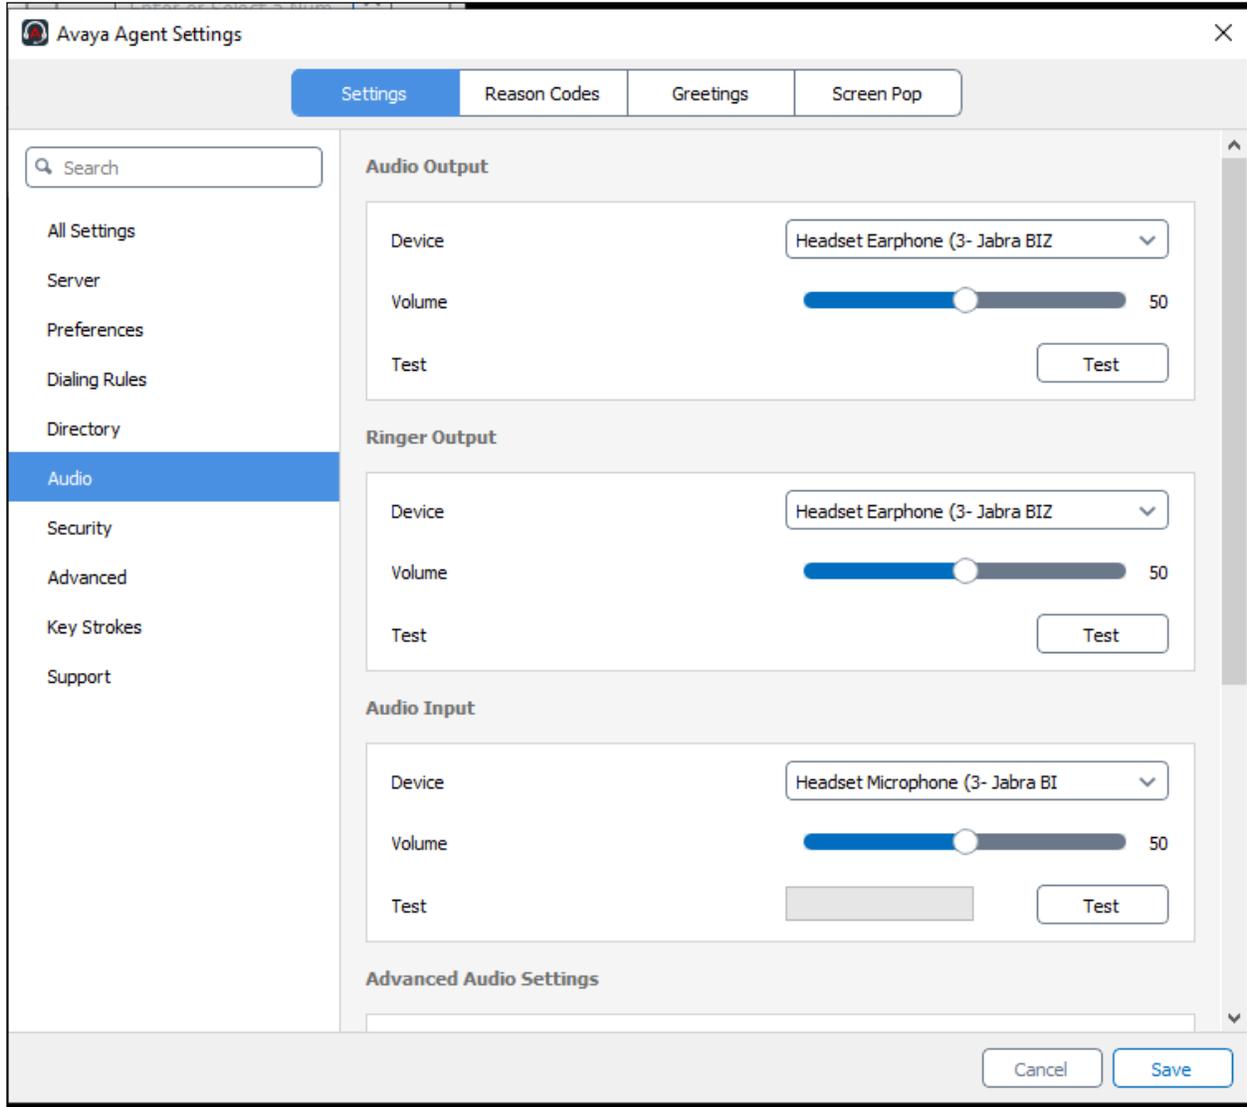

Scrolling further below for **Advanced Audio Settings**, select **Control Device** as *Jabra BIZ 2300* and **Headset Integration** as *Advanced (SDK Native)* which enables the advanced headset feature. If the **Headset Integration** is selected as *Basic (HID API)*, the call button can only performed one function i.e. answer, hold or drop.


Click **Save** to complete the audio settings.

The screenshot shows the 'Avaya Agent Settings' window with the 'Settings' tab selected. The left sidebar contains a search bar and a list of settings categories: All Settings, Server, Preferences, Dialing Rules, Directory, Audio (highlighted), Security, Advanced, Key Strokes, and Support. The main content area is divided into two sections: 'Audio Input' and 'Advanced Audio Settings'. The 'Audio Input' section includes a 'Device' dropdown set to 'Headset Microphone (3- Jabra BI)', a 'Volume' slider at 50, and a 'Test' button. The 'Advanced Audio Settings' section includes: 'Control Device' dropdown set to 'Jabra BIZ 2300', 'Headset Integration' dropdown set to 'Advanced (SDK Native)', 'Call Button' dropdown set to 'Answer', 'Noise Suppression' dropdown set to 'Disabled', 'Auto Gain Control' checkbox checked, and 'Echo Cancellation' checkbox unchecked. At the bottom right, there are 'Cancel' and 'Save' buttons.

8. Verification Steps

This section verifies that the Jabra solution has been successfully integrated with Agent Desktop PC.

1. Make incoming and outgoing calls and verify that calls can be established with two-way audio. For incoming calls, answer the call by pressing the call button on the in-line call controller of the headset (as shown below).
2. End the call by pressing the same call button on the in-line call controller of the headset.
3. Verify also that the headset is able to remotely control call functions such as answer, mute/un-mute, hold/resume and adjust the volume on the in-line call controller. Call Hold is done by pressing the call button once. Pressing the call button again will resume the call. Similarly, verify such call control functions could be done on the Agent Desktop.

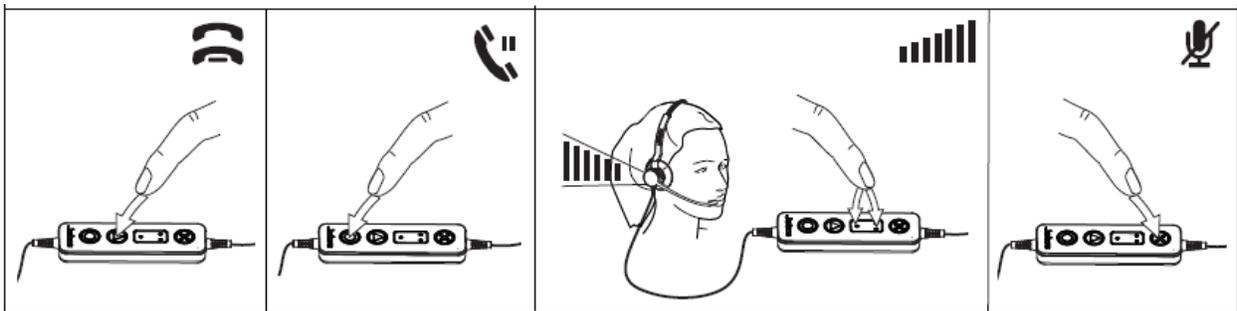

9. Conclusion

These Application Notes describe the configuration steps required to integrate Jabra BIZ 2300 Mono/Duo USB-A/USB-C Headset with Avaya Agent for Desktop. All test cases were completed successfully with observations noted in **Section 2.2**.

10. Additional References

This section references the Avaya and Jabra documentation that are relevant to these Application Notes.

The following Avaya product documentation can be found at <http://support.avaya.com>.

- [1] *Administering Avaya Aura® Communication Manager*, Release 8.1.x, Issue 8, Nov 2020
- [2] *Administering Avaya Aura® Session Manager*, Release 8.1.x, Issue 7, Oct 2020.
- [3] *Using Avaya Agent for Desktop*. Release 2.0.6.7, Issue 1, Dec 2020

The following Jabra documentation can be found at <http://www.jabra.com>.

- [4] *Jabra BIZ 2300 headset USB Quick start guide*.

©2021 Avaya Inc. All Rights Reserved.

Avaya and the Avaya Logo are trademarks of Avaya Inc. All trademarks identified by ® and ™ are registered trademarks or trademarks, respectively, of Avaya Inc. All other trademarks are the property of their respective owners. The information provided in these Application Notes is subject to change without notice. The configurations, technical data, and recommendations provided in these Application Notes are believed to be accurate and dependable, but are presented without express or implied warranty. Users are responsible for their application of any products specified in these Application Notes.

Please e-mail any questions or comments pertaining to these Application Notes along with the full title name and filename, located in the lower right corner, directly to the Avaya DevConnect Program at devconnect@avaya.com.